

Catalogue Surge Protective Devices

2022



Content

General

Who we are, What we do	4
Solutions for complex surge protection	5
SALTEK® on-line	7
News 2022	8
Catalogues and brochures	10
Features of SALTEK® surge arresters	11
Information – safety, ecology, legislation	12

SPDs connected to LV power supply systems up to 1000 V

SPDs Type 1 and Type 1 and 2 - lightning current arresters	23
SPDs Type 1 and 2 - combined lightning current and surge arresters	32
SPDs Type 2 - surge arresters	49
SPDs Type 3 - surge protections	63
Surge separating inductors	83

Surge Protective Devices for LED lights

Surge Protective Devices for LED lights	85
---	----

Surge Protective Devices for photovoltaic systems

PV SPDs Type 1 and 2	91
PV SPDs Type 2	95

SPDs for data / signalling / telecommunication networks

Devices with pluggable module	99
Compact devices	131
Terminal blocks with screw terminals	145
Terminal blocks with screwless terminals	153
SPDs for LSA-PLUS strips	161
SPDs for phone lines	167
SPDs for Ethernet networks	171
Multichannel SPDs for Ethernet networks	179
SPDs for devices with coaxial interfaces	189

Isolating Spark Gaps

Isolating Spark Gaps ISG and ISG Ex	201
-------------------------------------	-----

Digital SPD tester

GIGATESTpro - SALTEK	212
----------------------	-----

Index of SALTEK® products

By type	213
By order number	215

Who we are

What we do

SALTEK® is a leading Czech based company specialising in the development and production of Surge Protective Devices. SALTEK® offers a complete range of SPDs (Types 1, 2, 3 and its combinations) in areas of low-voltage power systems and installations, renewable energy, information technologies, measuring & regulation and telecommunications.

SALTEK® products provide protection against atmospheric and technological overvoltage and ensure safe and trouble-free operation of technology, machinery and electrical appliances in industry, transport, telecommunications, data centres, office buildings as well as households.



Over 25 years of success in both the Czech Republic and abroad

- We have been on the market since 1995.
- Our products protect various technologies in a lot of countries in Europe, Asia and Africa.

Our own development = foundation of permanent and dynamic company development

- Our R&D department providing continuous innovation is the foundation of our further development.
- Our experienced R&D team utilises a testing laboratory with the latest equipment featuring unique devices and technologies that support fast and high-quality development process.
- State-of-the-art materials, construction procedures and measurement methods are essential for us.

Flexibility and speed = our basic credo

- Flexible approach to the implementation of special customised solutions and products ODM/OEM all over the world.
- Fast delivery according to customers' requests.

Customers = power engine

- Customers are our everlasting inspiration. Hands-on experience linked to technical innovation gives us the opportunity to provide solutions for complex surge protection.
- High-class and fast technical support, regular training of specialists as well as extensive marketing and sales services are our standards.

Quality + international standards = our essentials

The safety, reliability and top quality of our products come first for us! Quality is our image. We are certified in compliance with international standards:

- EN ISO 9001 ■ EN ISO 14001 ■ ISO 45001

We are an active member of Czech and international standardization institutions - ÚNMZ, IEC and CENELEC, which define standards for the development of surge protection in the future.



What we do

Solutions for complex surge protection

We combine technical innovation with expertise. Thanks to our customers' feedback and our own development, SALTEK® products provide solutions for complex surge protection for various applications in different areas.



Industry

Commercial buildings use very sophisticated systems prone to abnormalities caused by overvoltage in the power system and signal lines. SALTEK® products minimize shut-down times of production technologies and subsequent financial losses.

- Protection of 230/400 V power system
- Protection of power system up to 1 000 V
- Protection of access security and fire alarm systems
- Protection of signalling and communication lines



Buildings

Both residential and commercial buildings feature a great number of sensitive technologies and appliances. SALTEK® products considerably increase their reliability and, consequently, greatly improve the user comfort of such buildings.

- Protection of 230/400 V power system
- Protection of aerial systems
- Protection of access, security and fire alarm systems, CCTV, telecommunications lines, data networks, etc.
- Protection of technological facilities in buildings (heating, air conditioning, etc.)



Photovoltaic (PV) systems

PV systems must withstand weather conditions as they are located in highly exposed places. SALTEK® products ensure the best possible protection against temporary overvoltage to provide trouble-free operation throughout their working life. Protection of PV power plants/PV technologies for residential houses and for factories/Off grid PV technology.

- Protection of DC and AC side
- Protection of signalling lines



Telecommunications

Located in rather exposed places, receiving and transmitting systems must withstand harsh atmospheric conditions during their working life. SALTEK® products ensure the best possible protection of technologies against lightning strikes and induced overvoltage and thus they significantly increase operational reliability of technologies on transmission routes.

- Protection of 230/400 V power system and DC powering
- Protection of receivers, transmitters and electronic control systems
- Protection of data networks



Electric Railways

In the railway applications are the safety of the persons, prevent existence of an impermissible high touch voltage and limiting overvoltage in the system and its connected parts of the most important requirements.

- Protection against high touch voltage
- Protection of railway technological equipment



Oil and gas pipelines

Very large systems which are exposed to undesirable effects of lightning strikes, induction from parallel lines of MV, HV or stray current near railways. These events negatively affect the technologies which are necessary for their trouble-free operation. SALTEK® products ensure the best possible protection of such technologies and significantly increase their reliability.

- Protection of 230/400 V power system and system, up to 1 000 V
- Protection of access security and fire alarm systems, signalling and communication lines
- Protection of pipelines against induced voltage

What we do

Solutions for complex surge protection

We combine technical innovation with expertise. Thanks to our customers' feedback and our own development, SALTEK® products provide solutions for complex surge protection for various applications in different areas.



Data centers

In the era of information technologies, data centers and server rooms have become an inevitable part of life and collected data are of vital importance. Inaccessibility or complete losses of data can have catastrophic consequences in both industrial areas and everyday life. SALTEK® products can protect them and prevent technical problems and financial losses.

- Protection of 230/400 V power system and DC powering
- Protection of data and communication technology



Electromobility

Developing electromobility needs a wide network of charging stations with a safe and reliable operation. Considering the location of charging stations, the surge protection by SALTEK® products is required to ensure the operation.

- Protection of 230/400 V power system
- Protection of measuring and control systems
- Protection of communication lines



Electrical energy storage

Together with the development of renewable energy sources and smart grids, the demand on efficient accumulation of electrical energy is growing. The accumulation can be partially accomplished by a storage of power. Storage systems need to be protected against surges.

- Protection of 230/400 V power system
- Protection of signalling and communication lines



LED public lighting systems

Installations of public lighting are extensive, and length of cables reaches up to hundreds of meters. The risk of induced overvoltage from lightning, disturbances and switching in distribution networks is high. Due to the posts of public lighting, the probability of a direct lightning strike is not negligible. Hence, the surge protection is important in case of sensitive LED technology, especially.

- Protection of 230/400 V power system
- LED lighting protection
- Protection of control circuits



Wind-power plants


Wind-power plants are modern sources of green energy. Due to its construction and location, plants are exposed to overvoltage or indirect lightning strikes. The surge protection is necessary.

- Generator protection
- Protection of the control system and the inverter
- Protection of signalling and communication lines

SALTEK® on-line

Product information always at hand

If you do not have our Catalogue available or further printed information you would be interested in, visit www.saltek.eu/en to see a comprehensive overview of our products and on-line support.

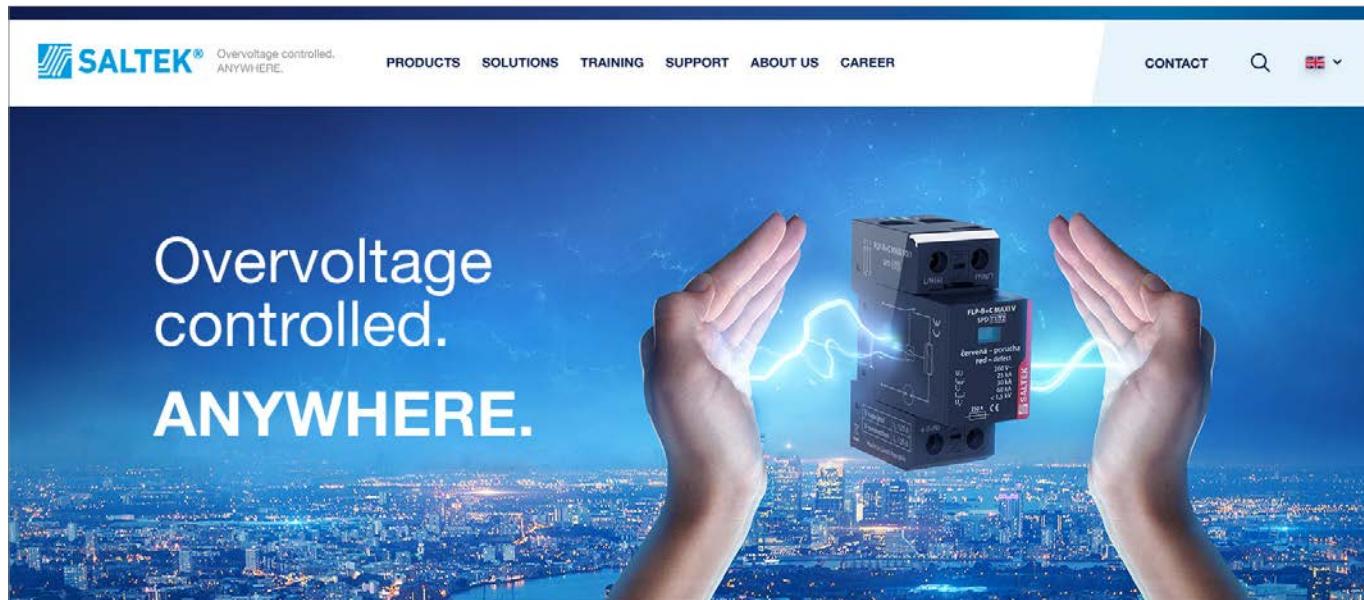

What can you find at www.saltek.eu/en?

On-line catalogue

- The latest information about the SALTEK® SPDs
- Generating of the product data sheet for a specific product in PDF format for you to print out or save
- Complete technical data
- Dimension drawings and wiring
- Instruction manuals
- Declaration of conformity

Technical support

For your solutions, optimization of your projects and designs of additional solutions in existing buildings/installations. We offer extensive technical support of surge protection according to EN 62305.

Applications for the selection of suitable SPDs

- Selector of SPDs for low-voltage systems
- Selector of SPDs for data/signalling/telecommunication lines

News 2022

FLP-EV12,5-VBH/1S+1 and FLP-EV12,5-VBH/3S+1

- Type 1 and Type 2 SPDs suitable for the protection of technological equipment located in the LPZ 0 zone
- Combined lightning arrester designed to protect voltage converters mounted e.g. in electric vehicle charging stations
- Designed for single-phase (1+1) or three-phase (3+1) TN-S or TT power supply systems
- With remote indication of the SPD status

See page: 38



FLP-12,5-075-VH/1 (S) and FLP-12,5-075-VH/2 (S)

- SPD type 1, type 2, for low voltages, suitable for installation in main switchboards or next to the protected equipment located outside a building in the LPZ 0 zone
- To protect power supply technologies with both 48 and 60 V AC or DC
- Single-pole design (FLP-12,5-075-VH/1(S)) and 2+0 circuit version (FLP-12,5-075/2(S))
- Used e.g. to protect equipment installed in "5G" telecommunication networks

See page: 40, 43



SLP-075 V/2 (S)

- SPD type 2 for low voltages, for mounting in sub distribution boards or next to the protected equipment
- To protect 48 and 60 V AC (single-phase TN-S) or DC power supply technologies
- Used e.g. to protect equipment installed in "5G" telecommunication networks

See page: 53



DM-.../1-...-DJ

- Compact SPD with coarse and fine protection of two-wire lines with 6, 12, 24 or 48 V DC
- ST 2+3 location with 0.5 A (R) or 2A (L2) peak current throughput
- To protect the interfaces of M&C systems, intrusion detection systems (IDS), fire alarm systems (FAS), etc., including the RS-485 interfaces against pulse overvoltage
- The L2 version, among other things, limits also high-frequency interferences

See page: 134



DL-TLF-UHF

- Two-stage protection of analog telephone lines combined with xDSL
- Extended frequency range for the xDSL applications
- Installation location at the entrance of a metal cable into the building or next to a DSL splitter

See page: 168



News 2022

DL-VDSL3

- Two-stage protection for ADSL2, VDSL2 and VDSL3 high-speed lines (including the 35b profile)
- Linear transmission design with high cut-off frequency for minimum impact onto xDSL signals!
- Installation at the entrance of the metallic cable into the building or close to the xDSL modem



See page: 169

DL-Cat.6A-60V

- Fine protection of metallic Ethernet networks with PoE and up to 10 Gbps
- Fine protection of general structured cabling
- Additional protection of technological equipment installed in LPZ1 and higher zones
- Protection of technological equipment against industrial overvoltages
- ST2+3 – installation as close as possible to the protected indoor equipment or at the interface of LPZ 1 and higher zones
- Not intended for use on outdoor mounted lines



See page: 173

DL-10G-PoE-IP66

- Two-stage protection for PoE-powered Ethernet endpoints (up to 10 Gbps)
- Supports all PoE/PoE+/PoE++ formats
- To provide protection to IP cameras, WLAN, radio communication technology (MW links), outdoor sensors, etc.
- IP66 protection degree to cope with outdoor installation requirements
- Easy cable connection (RJ45) thanks to the possibility of opening the protection cabinet
- Easy installation on surfaces and on poles
- ST1+2+3 – installation next to the outdoor protected device or at the LPZ 0 - LPZ 1 interface



See page: 175

DL-..G-60V-PoE


- Two-stage protection for general structured cabling networks (including Ethernet networks with PoE)
- Supports all PoE/PoE+/PoE++ formats
- Increased Uc level (< 60 V) to ensure protection of all twisted pair signals (RS-485, KNX,...)
- ST1+2+3 – installation on lines entering from external environment at the LPZ 0 - LPZ 1 interface



See page: 176

DL-Cat.6A-60V-M (-R-M), DL-..G-60V-PoE-M

- Plug-in modules of DL-Cat.6A-60V and DL-..G-60V-PoE protections, for installation in the DL-PL-RACK-1U multichannel box
- Easy "Hot Plug&Play" installation
- Any combination of up to 16 modules in a box for combined networks and protection flexibility
- Saves space, cabling and time during installation or reconfiguration



See page: 183, 185

Our offer of supporting materials

Catalogue and Company Profile



Catalogue 2022




Catalogue Voltage Limiting Devices



Company Profile

Practical Guides



Commercial receiving systems



Inspection



DC railways applications




Surge protection of LV power systems



Signal and Data lines

Solutions



Railway stations and railways



Telecommunications



Photovoltaic systems



Electromobility



Electrical energy storage



Wind power plant



Pipelines and cathodic protection stations



Electronic Fire Security Systems



Emergency lights/Evacuation routes



Public address systems



CCTV and IPTV cameras




LED street lighting systems

To download or order at www.saltek.eu/en

Features of SALTEK® surge arresters

Example: SLP-275 V/3S+1

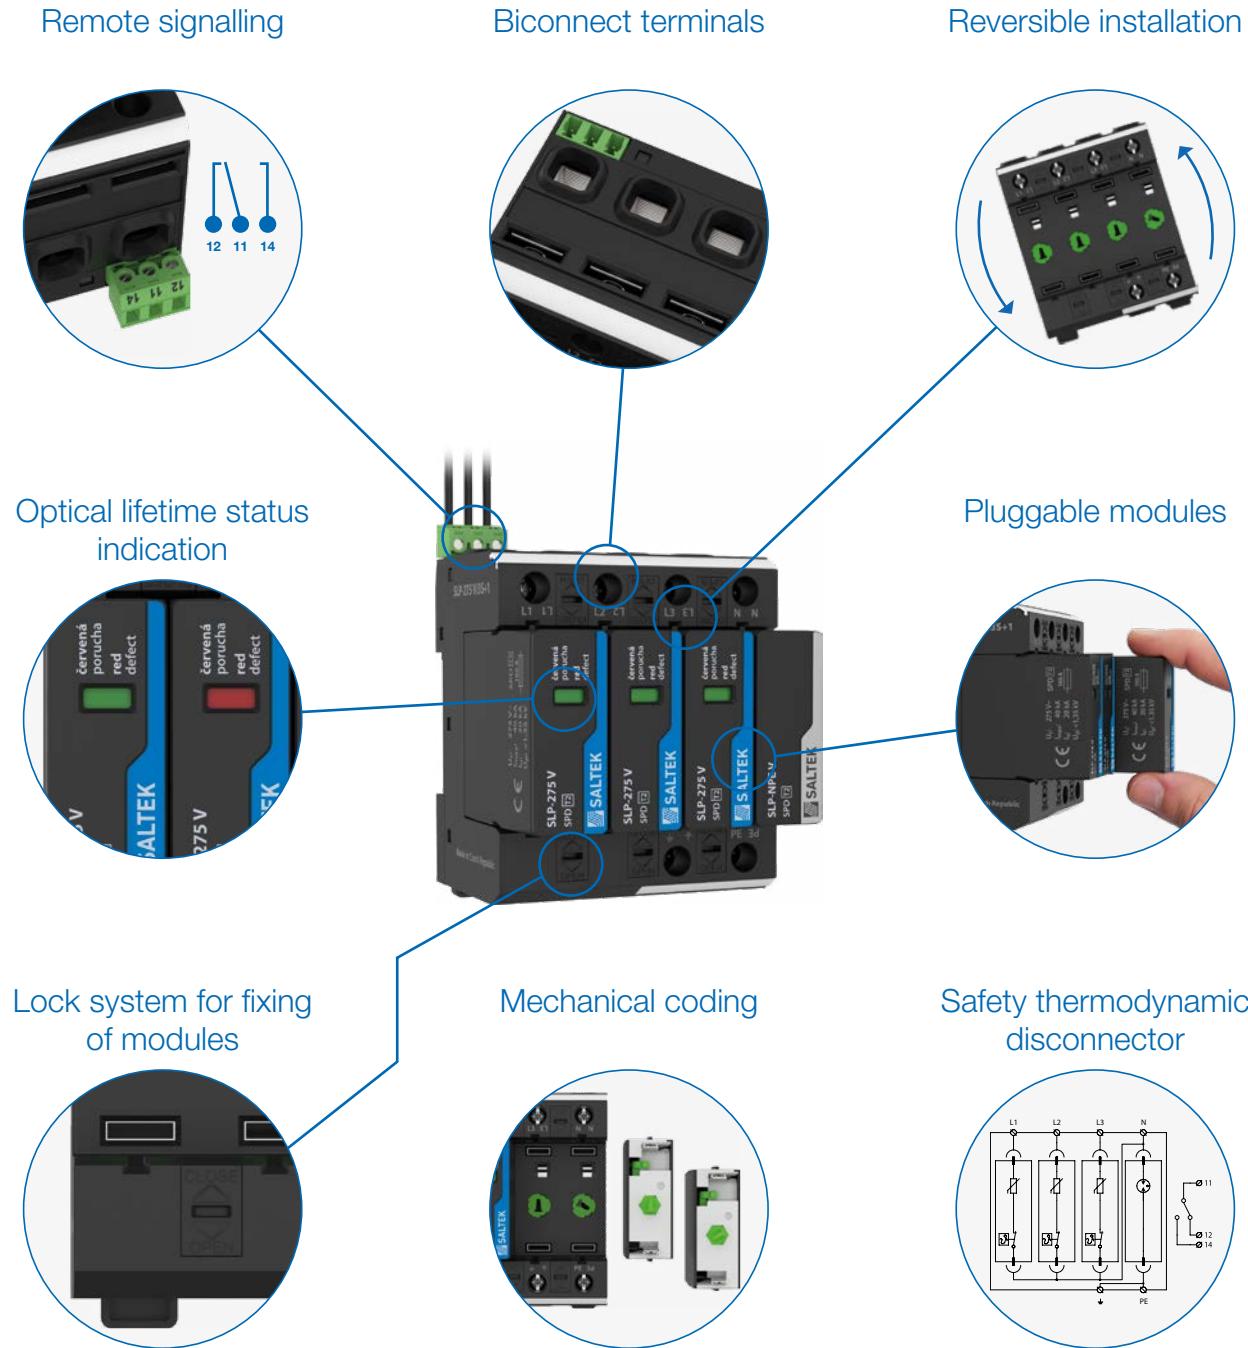

SPD Type 1 and SPD Type 1 and 2. FLP series



SPD Type 2. SLP series



SPD Type 3, e.g., DA series



PV SPD Type 2. SLP series for photovoltaic applications



PV SPD Type 1 and 2. FLP series for photovoltaic applications



SPD for data/signal/telecommunication networks

Module marking = easy to identify

To identify arresters in the distribution board easily, SALTEK® pluggable modules and SPDs are marked in colour so it is easy for customers to identify the type of SPD installed in their distribution board.



"N-PE" modules

Information

Safety, ecology, legislation



Safety notice

The products operate with life-threatening electrical voltages. Only a person with appropriate electrical qualification may install the devices. Before installation, the relevant electrical circuit must be disconnected from all sources of electrical power.



Environmental warnings

Products marked with graphic symbol of a crossed-out underlined bin are e-waste within the meaning of the EU Regulation (2012/19/EU). The product must be disposed of in an environmentally sound manner within the framework of take-back (withdrawal), i.e. it must be disposed of at a designated place. The materials and technological procedures used are in compliance with the requirements of Directive 2011/65/EU of the European Parliament and of the Council (RoHS) and Regulation 1907/2006/EC of the European Parliament and of the Council (REACH) in their latest valid version.



Legal notice

FLP, FLP-B+C MAXI, SLP, HX, SX, FX are trademarks of SALTEK s.r.o.

Subject to change. The current offer and product parameters can be found at www.saltek.eu in the "Products" section.

SPDs connected to LV power supply systems up to 1 000 V



- Office and commercial buildings
- Industrial buildings and installations
- Energy distribution
- Residential buildings
- Smart buildings

- SPD Type 1 – Lightning Current Arresters
- SPD Type 1 and 2 – Lightning Current Arresters
- SPD Type 2 – Surge Arresters
- SPD Type 3 – Surge Protections

Lightning and surge protection

1. Introduction – Legislative

The use of modern sophisticated equipment, consumer electronics and control systems places high demands on their electromagnetic compatibility. Modern electronic control systems provided with circuits with a very high integration level are becoming more and more sensitive to electromagnetic disturbance and overvoltage. The installation of surge protections according to effective legal standards will reduce the danger of their being damaged to a minimum. Technical designs are defined by standards harmonised with EU standards:

- Protective bonding to the same potential including the conductor cross section for the main and additional bonding is defined by standards **EN 50310 ed. 4.**, **IEC (EN) 60364-5-54**, **IEC (EN) 60364-4-41**
- Lightning protection is specified in the standard **IEC (EN) 62305**, harmonised with European standards. **IEC (EN) 62305-1** deals with general principles.

Lightning protection level	Maximum lightning parameter according to LPL
LPL	First short discharge
LPL I	200 kA
LPL II	150 kA
LPL III	100 kA
LPL IV	100 kA


IEC (EN) 62305-2 – deals with the risk assessment for buildings or engineering networks struck by lightning.

IEC (EN) 62305-3 – deals with the proposal for external lightning protection (lightning conductor).

IEC (EN) 62305-4 – deals with protective measures resulting in the reduction of failures of electrical and electronic systems inside the building (zone protection)

- Classification of protections is set forth in standard **IEC (EN) 61643-11**. Devices are classified into three basic categories:
 - SPD Type 1 – lightning current arresters
 - SPD Type 2 – surge arresters
 - SPD Type 3 – surge arresters
- Classification of low-voltage distribution into impulse resistance categories, including specification of the maximum allowed overvoltage is determined in standard **IEC (EN) 60664-1**

Example of main and additional bonding

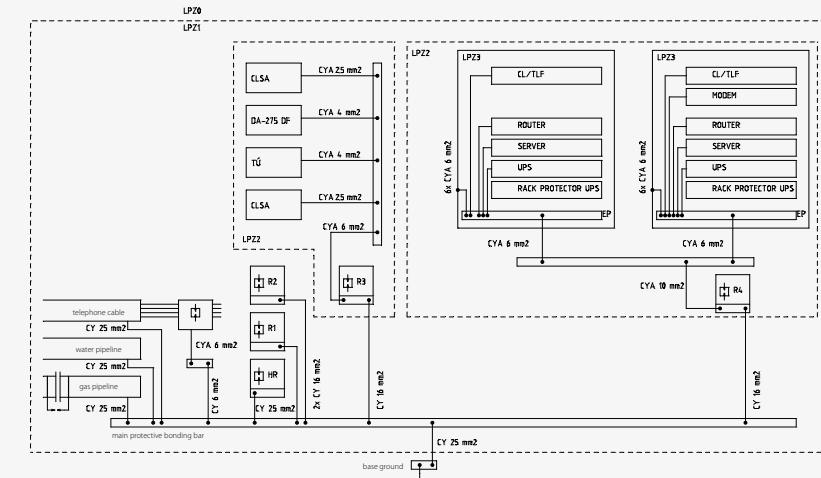

Lightning protection zones

The standard IEC (EN) 62305-4 defines lightning protection zones LPZ in view of the direct and indirect (electromagnetic pulse – LEMP) lightning effect:


LPZ 0_A – free area (possibility of a direct lightning strike, non-attenuated LEMP)

LPZ 0_B – lightning conductor receiver protection area (direct lightning strike protection, non-attenuated LEMP)


LPZ 1 – inside a building (direct lightning strike is eliminated, attenuated LEMP – depending upon shielding)

LPZ 2 – inside a room – e.g. a server room with a conductive floor, FeAl floors and wall lining (further attenuation of LEMP in connection with a higher shielding level)


LPZ 3 – inside a metal box (e.g. 19" RACK)

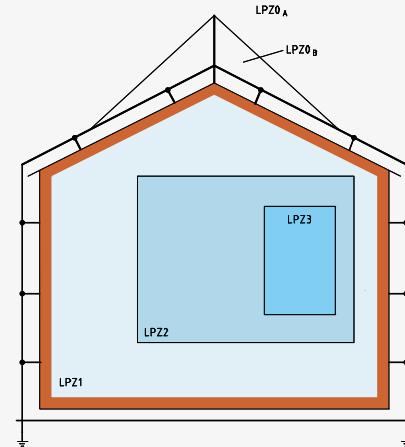

Rated impulse for equipment (acc. to IEC (EN) 60664-1) or Impulse-withstand voltage.

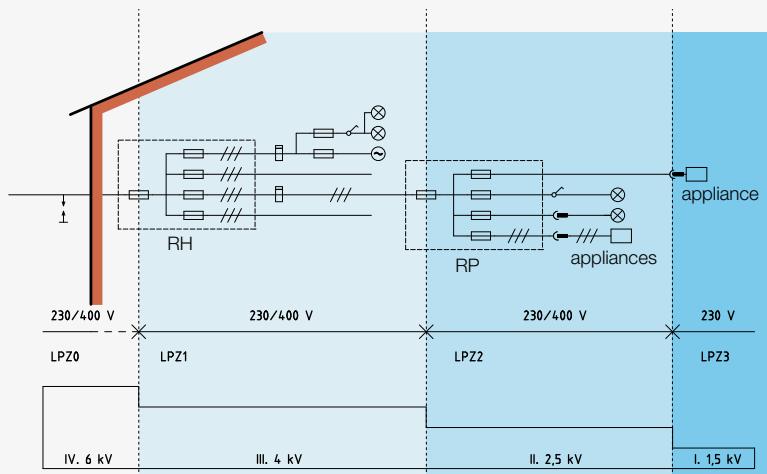

2. Connection of surge protective devices in networks

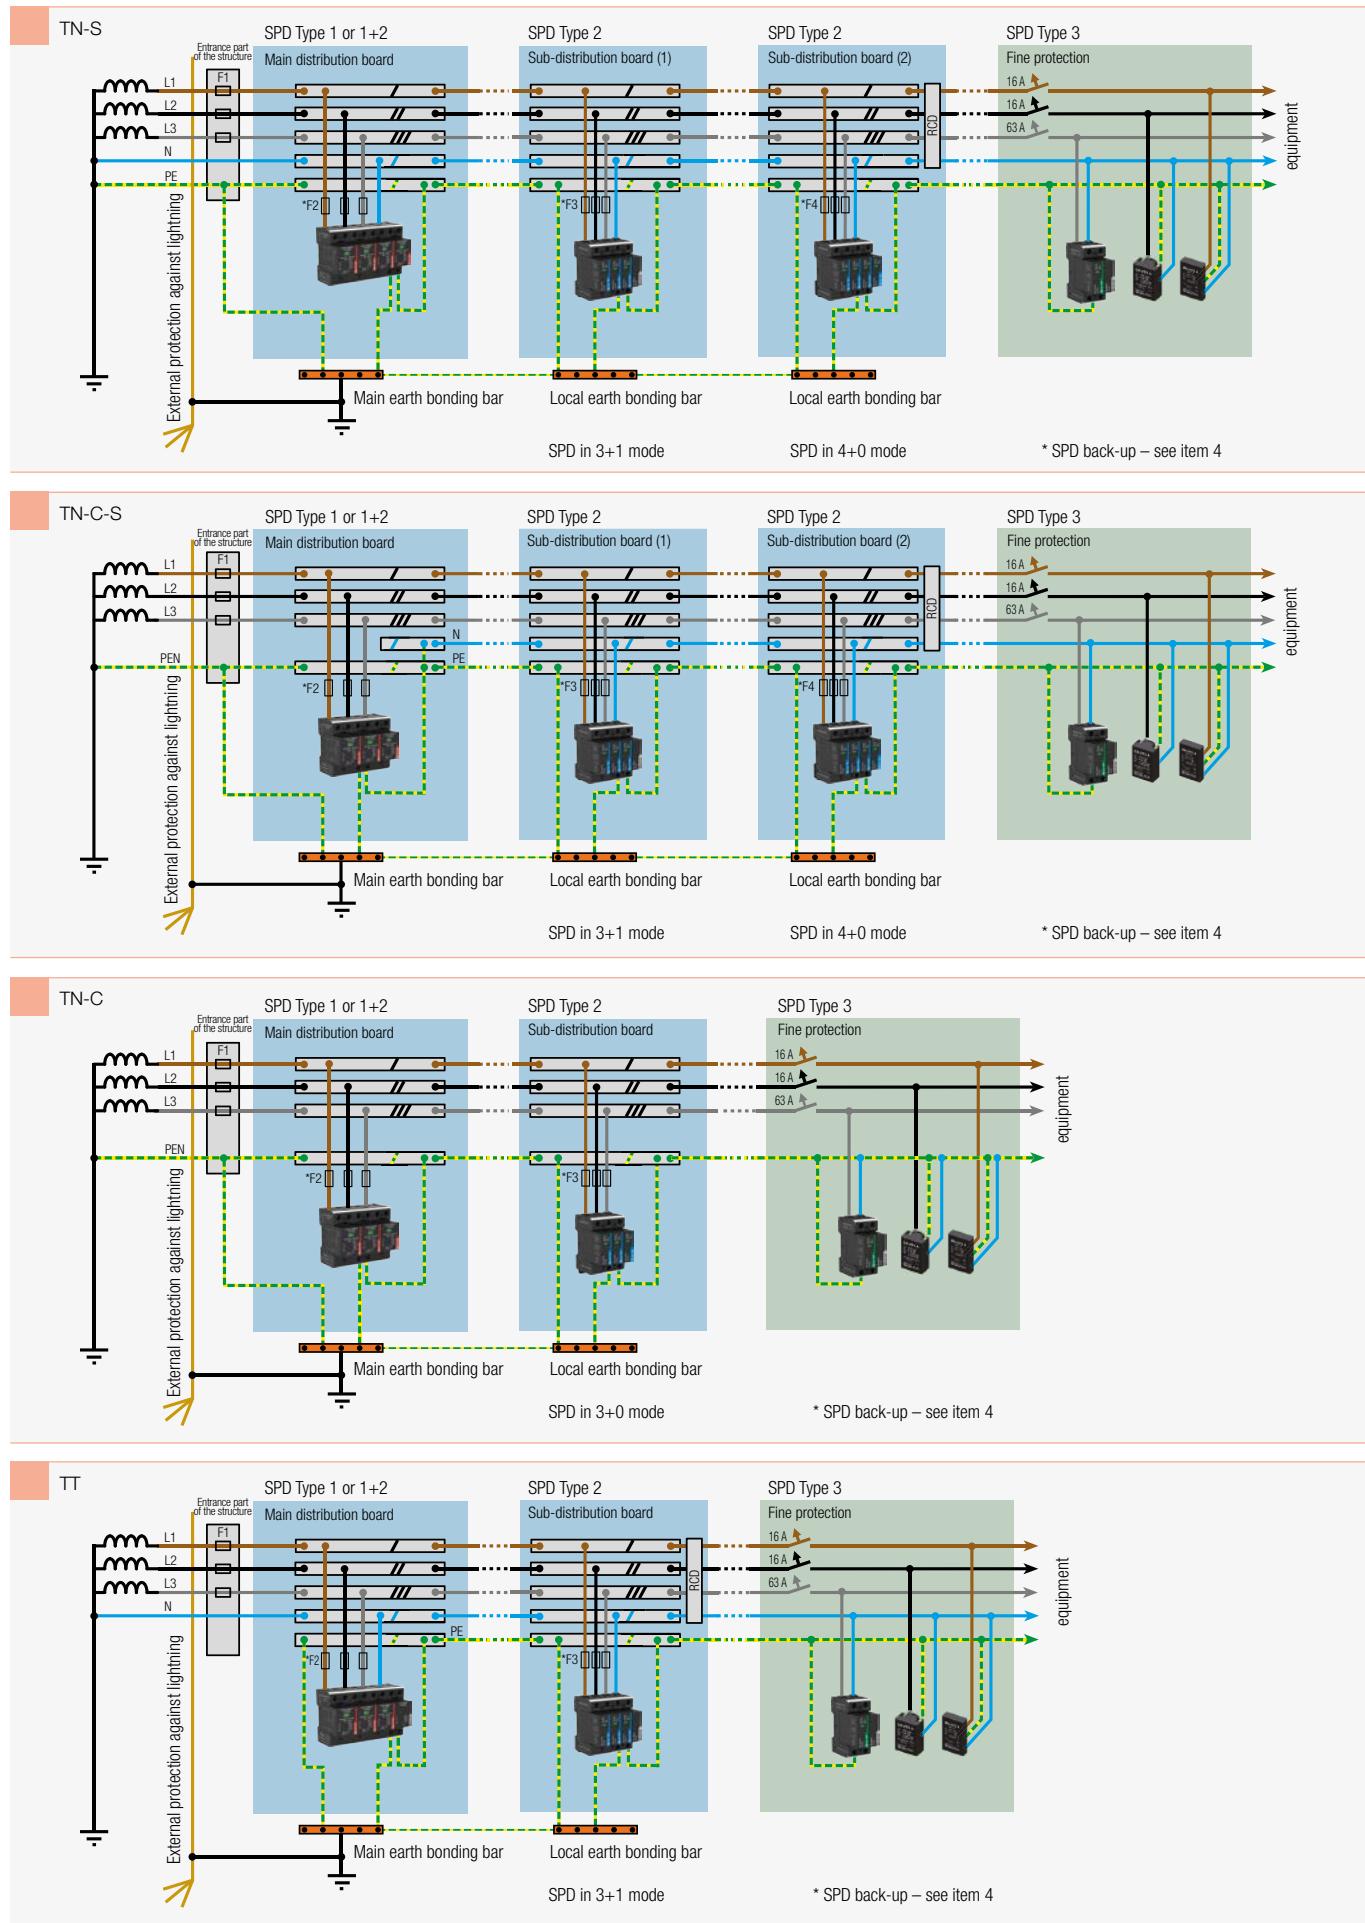

3. SPD dimensioning and their application

Sizing SPD Type 1 IEC (EN) 62305		
Location of SPD Type 1: at the boundary of LPZ0 and LPZ1 zones in main distribution board		
LPL	Lightning	Total SPD
I.	to 200 kA	100 kA
II.	to 150 kA	75 kA
III.	to 100 kA	50 kA
IV.	to 100 kA	50 kA

Application of SALTEK SPD Type 1 IEC (EN) 62305		
Location of SPD Type 1: at the boundary of LPZ0 and LPZ1 zones in main distribution board		
LPL	Lightning	Total SPD
I.	to 200 kA	100 kA

Conditions met by:

FLP-SG50 V(S)/1

- large industrial facilities
- structures of special importance
- technological facilities
- administrative structures

FLP-B+C MAXI V(S)

- administrative structures
- civic amenities
- family houses
- near transformer stations

FLP-25-T1-V(S)

FLP-12,5 V(S)

- family houses w/o down conductor system with a cable connector in the housing and in the LPS III class
- structures in LPS IV class, i.e. structures and halls without persons and interior equipment, structures only with heavy current wiring

FLP-12,5 V(S)

- on LW earthing supply cables to the structure where the connection is not directly to the public distribution network (i.e. interconnection between 2 structures)
- to sub-distribution boards within the structure, with a cable length from the last SPD of over 50 m

Application of SALTEK SPD Type 2 IEC (EN) 62305		
Location of SPD Type 2: at the boundary of LPZ1 and LPZ2 zones or sub-distribution board		
Conditions met by:		
SLP-xxx	- all types of wiring	- type of network (TN, IT, T T)
	- connection method	- nominal voltage


Application of SALTEK SPD Type 3 IEC (EN) 62305		
Location of SPD Type 3: at the boundary of LPZ2 and LPZ3 zones (technology)		
Conditions met by:		
DA-275 (DIN rail version)	- all types of wiring (if the equipment is in the clamp or distribution board)	
DA-275..., CZ...	- all types of wiring (sockets with overvoltage protection at the shortest possible distance from the appliance)	
xxx-OVERDRIVE	- all types of wiring adapters for plugs with overvoltage protection	


4. Principle of overcurrent protection of SPD

The SPD should be provided with additional protection in this case only if the value of the line protection (F1 fuse) is higher than the value of the respective SPD shown in the catalogue (F2 fuse) and the SPD protection always has the value shown in the manufacturer's catalogue (parameter – maximum additional protection).

An example of back-up fuse for SPD – FLP-B+C MAXI V – in different supply networks.

The catalogue value of maximum back-up fuse for FLP-B+C MAXI V is 250 A, and 125 A for the "V" connection.

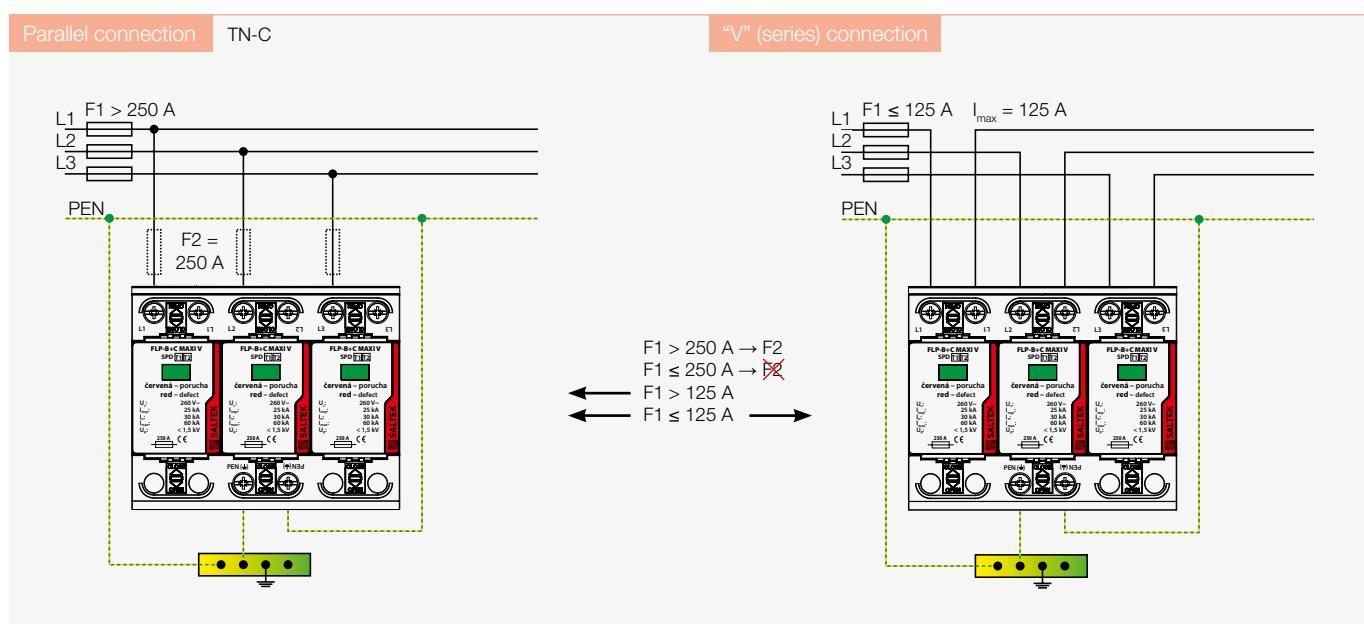

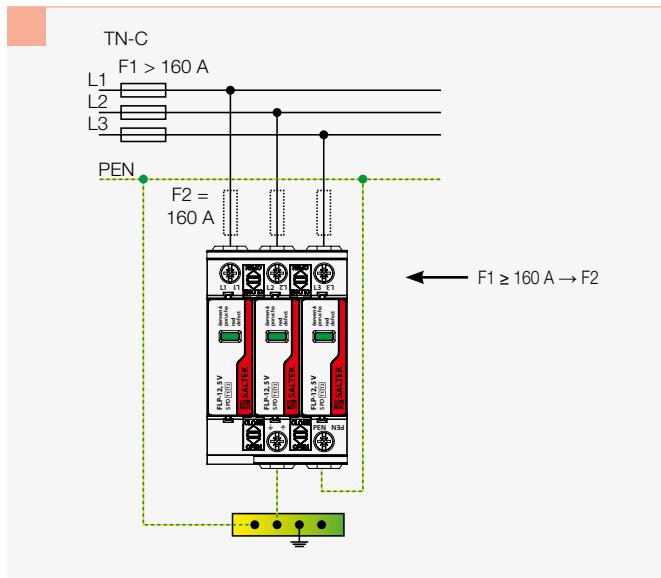


5. Principles for positioning and connecting of lightning and surge arresters

Surge protective devices and lightning current arresters cannot be positioned in the distribution board at random. It should be noted that protection should be located in the closest proximity to the entry feed cable of the distribution board to minimize the area of the induction loop, see the image below.

Another important condition for connecting the SPD is to minimize the impedance of connecting conductors. Stranded conductors or strip lines are preferentially used for connecting SPD Type 1. It is also important that the length of the connecting conductors is as small as possible – see IEC 60364-5-53 chapter 534 (HD 60364-5-534). The cross-section of the connecting conductors should be as large as possible – maximum up to the cross-section according to the type of connector. In SPD Type 1 (lightning arresters) the connecting conductors are an integral part of the main bonding – as determined by the IEC (EN) 60364-4-41 standard, while minimum cross-sections of the connecting conductors are specified in IEC (EN) 60364-5-54.

If SPDs are located in circuits where residual current devices are installed, the SPD should be positioned before the residual current device (not in the residual current device circuit), to prevent spontaneous overload tripping of the RCD affected by surge arresters or lightning current arresters.

Should an surge protection be located in the residual current devices circuit, RCD type S or G should be used. Even in this case it should be noted that the resistance of these residual current devices is not high (5 to 8 kA in wave 8/20 μ s) which makes it impossible to use any SPD in the circuit of the residual current device. If you want to prevent a residual current device type S or G responding to surge protection by overload tripping, only a protection SPD Type 3 can be used in the circuit of the residual current device.

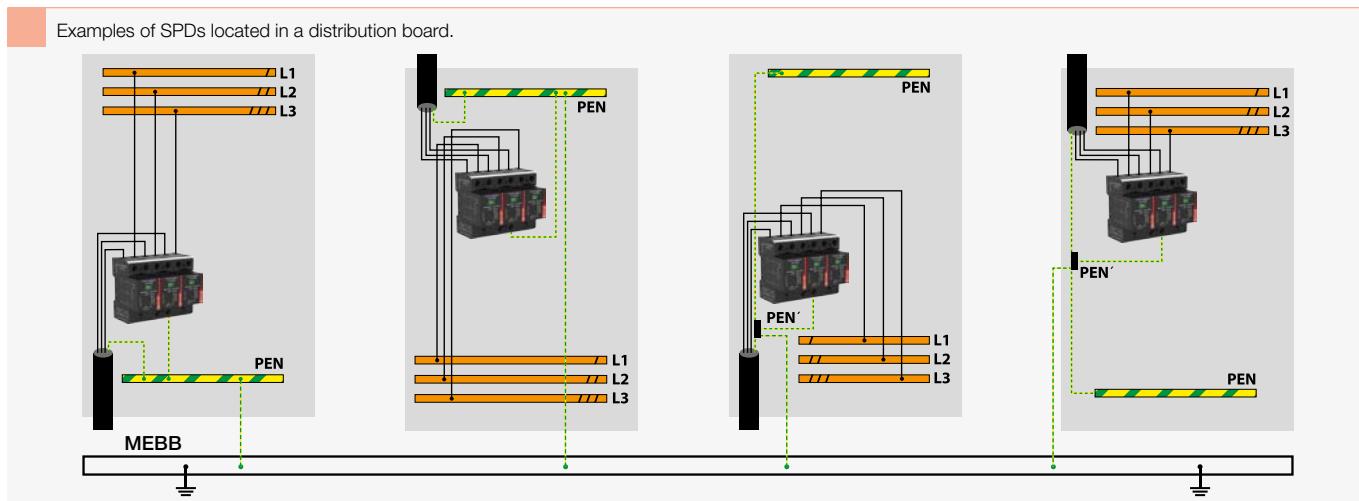


6. SPD dimensioning

Only the SPD Type 1 should be dimensioned. Dimensioning of the SPD Type 1 should be based on the calculation of the lightning protection level (LPL) for the lightning protection system (LPS).

The table from IEC (CLC/TS) 61643-12 below shows minimum values of the discharge lightning strike current to the pole considering the lightning protection (LPL) class of the building for the SPD Type 1.

If the LPL value is not known, the worse scenario is anticipated			Low voltage networks								
LPL	Maximum current corresponding to LPL	Number of conductors (n)	TT		TN-C	TN-S		IT without neutral conductor		IT with neutral conductor	
			Connection mode			Connection mode		Connection mode			
			CT1	CT2		CT1	CT2	CT1	CT2	L-PE	L-N N-PE
			L-PE N-PE	L-N	N-PE	L-PEN	L-PE N-PE	L-N	N-PE	L-PE	L-N N-PE
I or unknown	200 kA	I_{imp} (kA)									
		5	N/A	N/A	N/A	N/A	20,0	20,0	80,0	N/A	N/A
		4	25,0	25,0	100,0	25,0	N/A	N/A	N/A	25,0	100,0
		3	N/A	N/A	N/A	N/A	33,3	33,3	66,7	33,3	N/A
		2	50,0	50,0	100,0	50,0	N/A	N/A	N/A	50,0	100,0
II	150 kA	I_{imp} (kA)									
		5	N/A	N/A	N/A	N/A	15,0	15,0	60,0	N/A	N/A
		4	18,8	18,8	75,0	18,8	N/A	N/A	N/A	18,8	75,0
		3	N/A	N/A	N/A	N/A	25,0	25,0	50,0	25,0	N/A
		2	37,5	37,5	75,0	37,5	N/A	N/A	N/A	37,5	75,0
III or IV	100 kA	I_{imp} (kA)									
		5	N/A	N/A	N/A	N/A	10,0	10,0	40,0	N/A	N/A
		4	12,5	12,5	50,0	12,5	N/A	N/A	N/A	12,5	50,0
		3	N/A	N/A	N/A	N/A	16,7	16,7	33,3	16,7	N/A
		2	25,0	25,0	50,0	25,0	N/A	N/A	N/A	25,0	50,0

Note: CT1 – SPD connected in the x+0 mode; CT2 – SPD connected in the x+1 mode

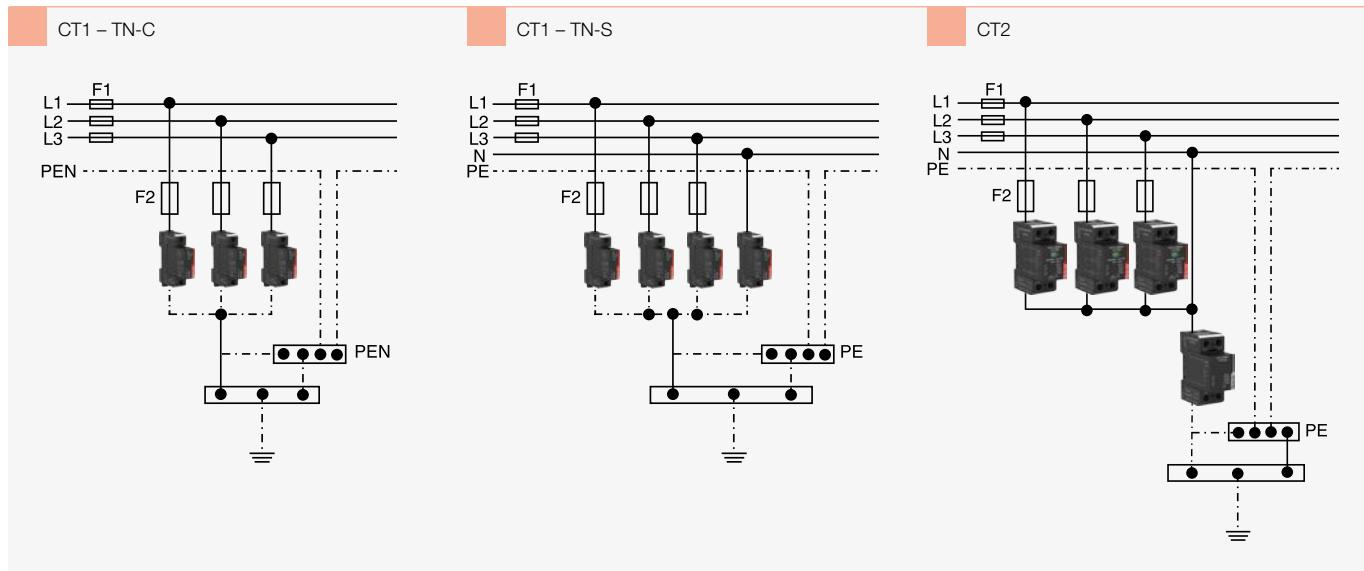


Behind the **FLP-B+C MAXI V...** in low-voltage power network 230/400 V AC is **not required to install any additional SPD** (e.g. SPD type 3) if the **length** of the electrical circuit from the

SPD to protected electrical equipment is **not exceed 10 meters** and the lengths of connecting cables of the SPD are not longer than 0,5 meter as it's mentioned in installation manual of SPD.

7. Reducing overvoltage in LPZ zones

The principle of reducing voltage using zones lies in progressive reduction of the overvoltage level to a safe value that will not damage the specific equipment or technology. To obtain a safe

overvoltage value, the whole structure is divided into individual zones and the SPD is installed at the boundary between the zones.

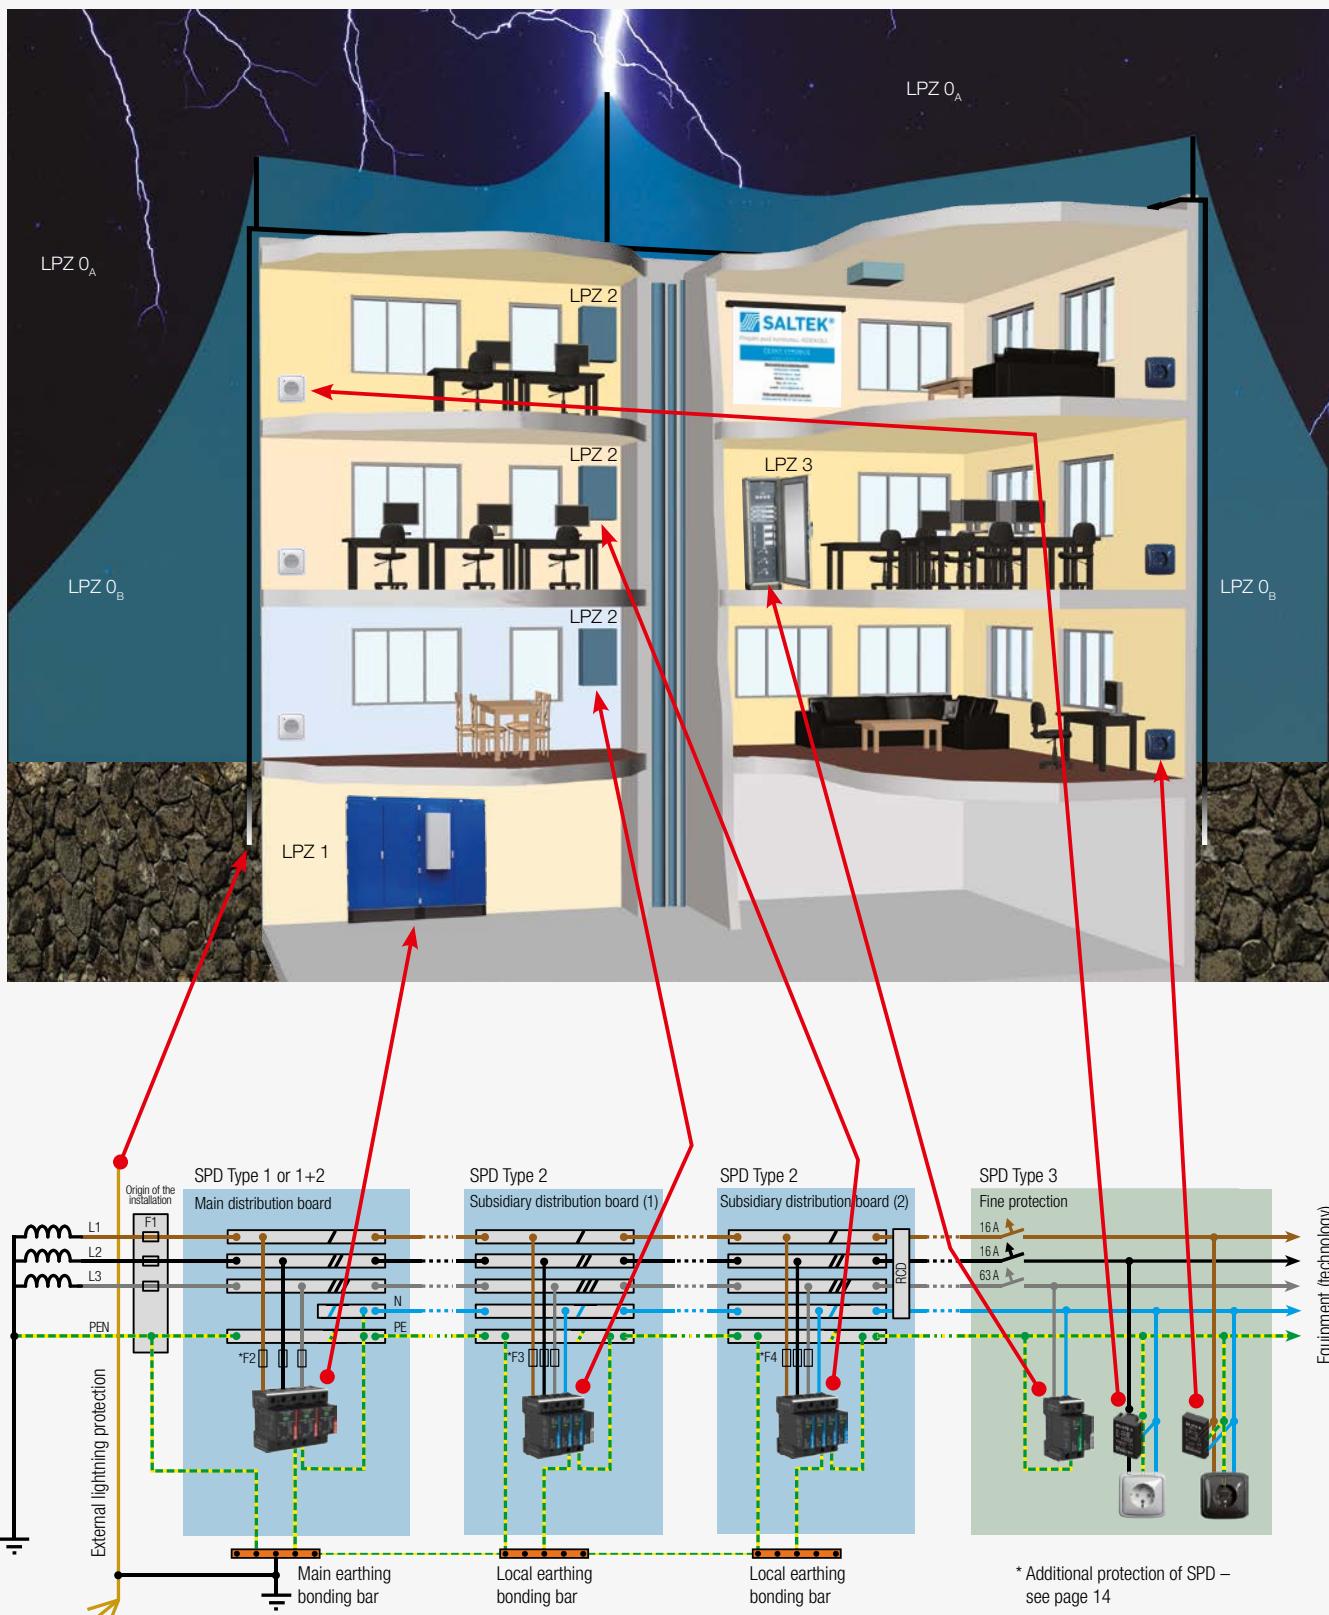


SALTEK® SPD applications in LV distribution systems

Type of structure	system	main distribution board (in the structure)	sub-distribution board (in the same structure)	end consumer
Family houses, administrative buildings, technological units, industrial structures	3-ph. TN-C	FLP-B+C MAXI V(S)/3 FLP-25-T1-V(S)/3	SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3	distance > 5 m
		FLP-25-T1-V(S)/3	SLP-275 V/3 (S)	surge protection to DIN rail: DA-275 V1(S)+1 (up to 63 A) DA-275 V/3(S)+1 (up to 63 A)
		FLP-B+C MAXI V(S)/3 FLP-25-T1-V(S)/3 + SLP-275 V/3 (S) (also with terminals to the equipment)	SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3	DA-275-DJ25-(S) (25 A)
	3-ph. TN-S	FLP-B+C MAXI V(S)/4 FLP-25-T1-V(S)/4	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	surge protection to DIN rail with RFI filter: DA-275-DFx-(S) (x = 2, 6, 10, 16 A) DA-275 DF25 for 25 A DA-275-DFix (x = 6, 10, 16 A)
		FLP-25-T1-V(S)/4	SLP-275 V/4 (S)	RACK-PROTECTOR multiple sockets for 19" enclosures
		FLP-B+C MAXI V(S)/4 FLP-25-T1-V(S)/4 + SLP-275 V/4 (S) (also with terminals to the equipment)	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	CZ-275-A, DA-275 CZS DA-275-A, DA-275-S
	3-ph. TN-C-S	FLP-B+C MAXI V(S)/3 FLP-25-T1-V(S)/3	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	for additional assembly to sockets and appliances
		FLP-25-T1-V(S)/3	SLP-275 V/4 (S)	
		FLP-B+C MAXI V(S)/3 FLP-25-T1-V(S)/3 + SLP-275 V/3 (S) (also with terminals to the equipment)	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	
Blocks of flats with 12 or more apartments (SPD located in the apart. distr. boards)	3-ph. TN-C		FLP-12,5 V/3 (S)	distance < 5 m
	3-ph. TN-S		FLP-12,5 V/4 (S)	place before the surge protection
	3-ph. TN-C-S	division in the apartment distr. board	FLP-12,5 V/3 (S)	RTO-xx
	1-ph. TN-C		FLP-B+C MAXI V(S)/1	(xx – rated current 16, 35 or 63 A)
	1-ph. TN-S		FLP-12,5 V/2 (S)	
Demanding applications (structures – operations classified at the risk of explosion, chemical plants,..., structures of a very high importance)	3-ph. TN-C	3x FLP-SG50 V(S)/1 with terminals to the equipment 3x FLP-SG50 V(S)/1 + 1x SLP-275 V/3 (S)	SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3	number according to connection
	3-ph. TN-S	4x FLP-SG50 V(S)/1 with terminals to the equipment 4x FLP-SG50 V(S)/1 + 1x SLP-275 V/4 (S)	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	1-phase TN-C 1x RTO-xx 1-phase TN-S 2x RTO-xx
	3-ph. TN-C-S	division in the main distribution board 3x FLP-SG50 V(S)/1 with terminals to the equipment 3x FLP-SG50 V(S)/1 + 1x SLP-275 V/4 (S)	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	3-phase TN-C 3x RTO-xx 3-phase TN-S 4x RTO-xx

SALTEK® SPD applications in LV distribution systems

Type of structure	system	main distribution board (in the structure)	sub-distribution board (in the same structure)	end consumer
Structures equipped with ESE (active down conductor)	3-ph. TN-C	<p>3x FLP-SG50 V(S)/1</p> <p>3x FLP-SG50 V(S)/1 also with terminals to the equipment 3x FLP-SG50 V(S)/1 + SLP-275 V/3 (S)</p>	<p>SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3</p> <p>SLP-275 V/3 (S) SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3</p> <p>SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p> <p>SLP-275 V/4 (S) SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p>	<p>distance > 5 m</p> <p>surge protection to DIN rail: DA-275 V/1(S)+1 (up to 63 A) DA-275 V/3(S)+1 (up to 63 A) DA-275-DJ25-(S) (25 A)</p> <p>surge protection to DIN rail with RFI filter: DA-275-DFx-(S) (x = 2, 6, 10, 16 A) DA-275 DF25 for 25 A DA-275-DFx (x = 6, 10, 16 A)</p> <p>RACK-PROTECTOR multiple sockets for 19" enclosures</p> <p>CZ-275-A, DA-275 CZS DA-275-A, DA-275-S for additional mounting to sockets and appliances</p>
	3-ph. TN-S	<p>4x FLP-SG50 V(S)/1</p> <p>4x FLP-SG50 V(S)/1 also with terminals to the equipment 4x FLP-SG50 V(S)/1 + SLP-275 V/4 (S)</p>	<p>SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p> <p>SLP-275 V/4 (S) SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p>	
	3-ph. TN-C-S	<p>3x FLP-SG50 V(S)/1</p> <p>3x FLP-SG50 V(S)/1 also with terminals to the equipment 3x FLP-SG50 V(S)/1 + SLP-275 V/3 (S)</p>	<p>SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p> <p>SLP-275 V/4 (S) SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p>	
Technological equipment with 1-phase connection	1-ph. TN-C	<p>FLP-SG50 V(S)/1</p> <p>with terminals to the equipment FLP-SG50 V(S)/1 + SLP-275 V/1 (S)</p>	<p>SLP-275 V/1 (S) distance > 50 m FLP-12,5 V/1 (S) distance > 100 m FLP-B+C MAXI V(S)/1</p>	<p>distance < 5 m SPD back-up RTO-xx (xx – rated current 16, 35 or 63 A)</p>
	1-ph. TN-S	<p>2x FLP-SG50 V(S)/1</p> <p>with terminals to the equipment 2x FLP-SG50 V(S)/1 + 1x SLP-275 V/2 (S)</p>	<p>SLP-275 V/2 (S) distance > 50 m FLP-12,5 V/2 (S) distance > 100 m FLP-B+C MAXI V(S)/2</p>	number according to connection
	1-ph. TN-C-S	<p>division in the main distribution board FLP-SG50 V(S)/1</p> <p>with terminals to the equipment FLP-SG50 V(S)/1 + SLP-275 V/1 (S)</p>	<p>SLP-275 V/2 (S) distance > 50 m 1x FLP-12,5 V/2 (S) distance > 100 m FLP-B+C MAXI V(S)/2</p>	<p>1-phase TN-C 1x RTO-xx 1-phase TN-S 2x RTO-xx 3-phase TN-C 3x RTO-xx 3-phase TN-S 4x RTO-xx</p>

Notes

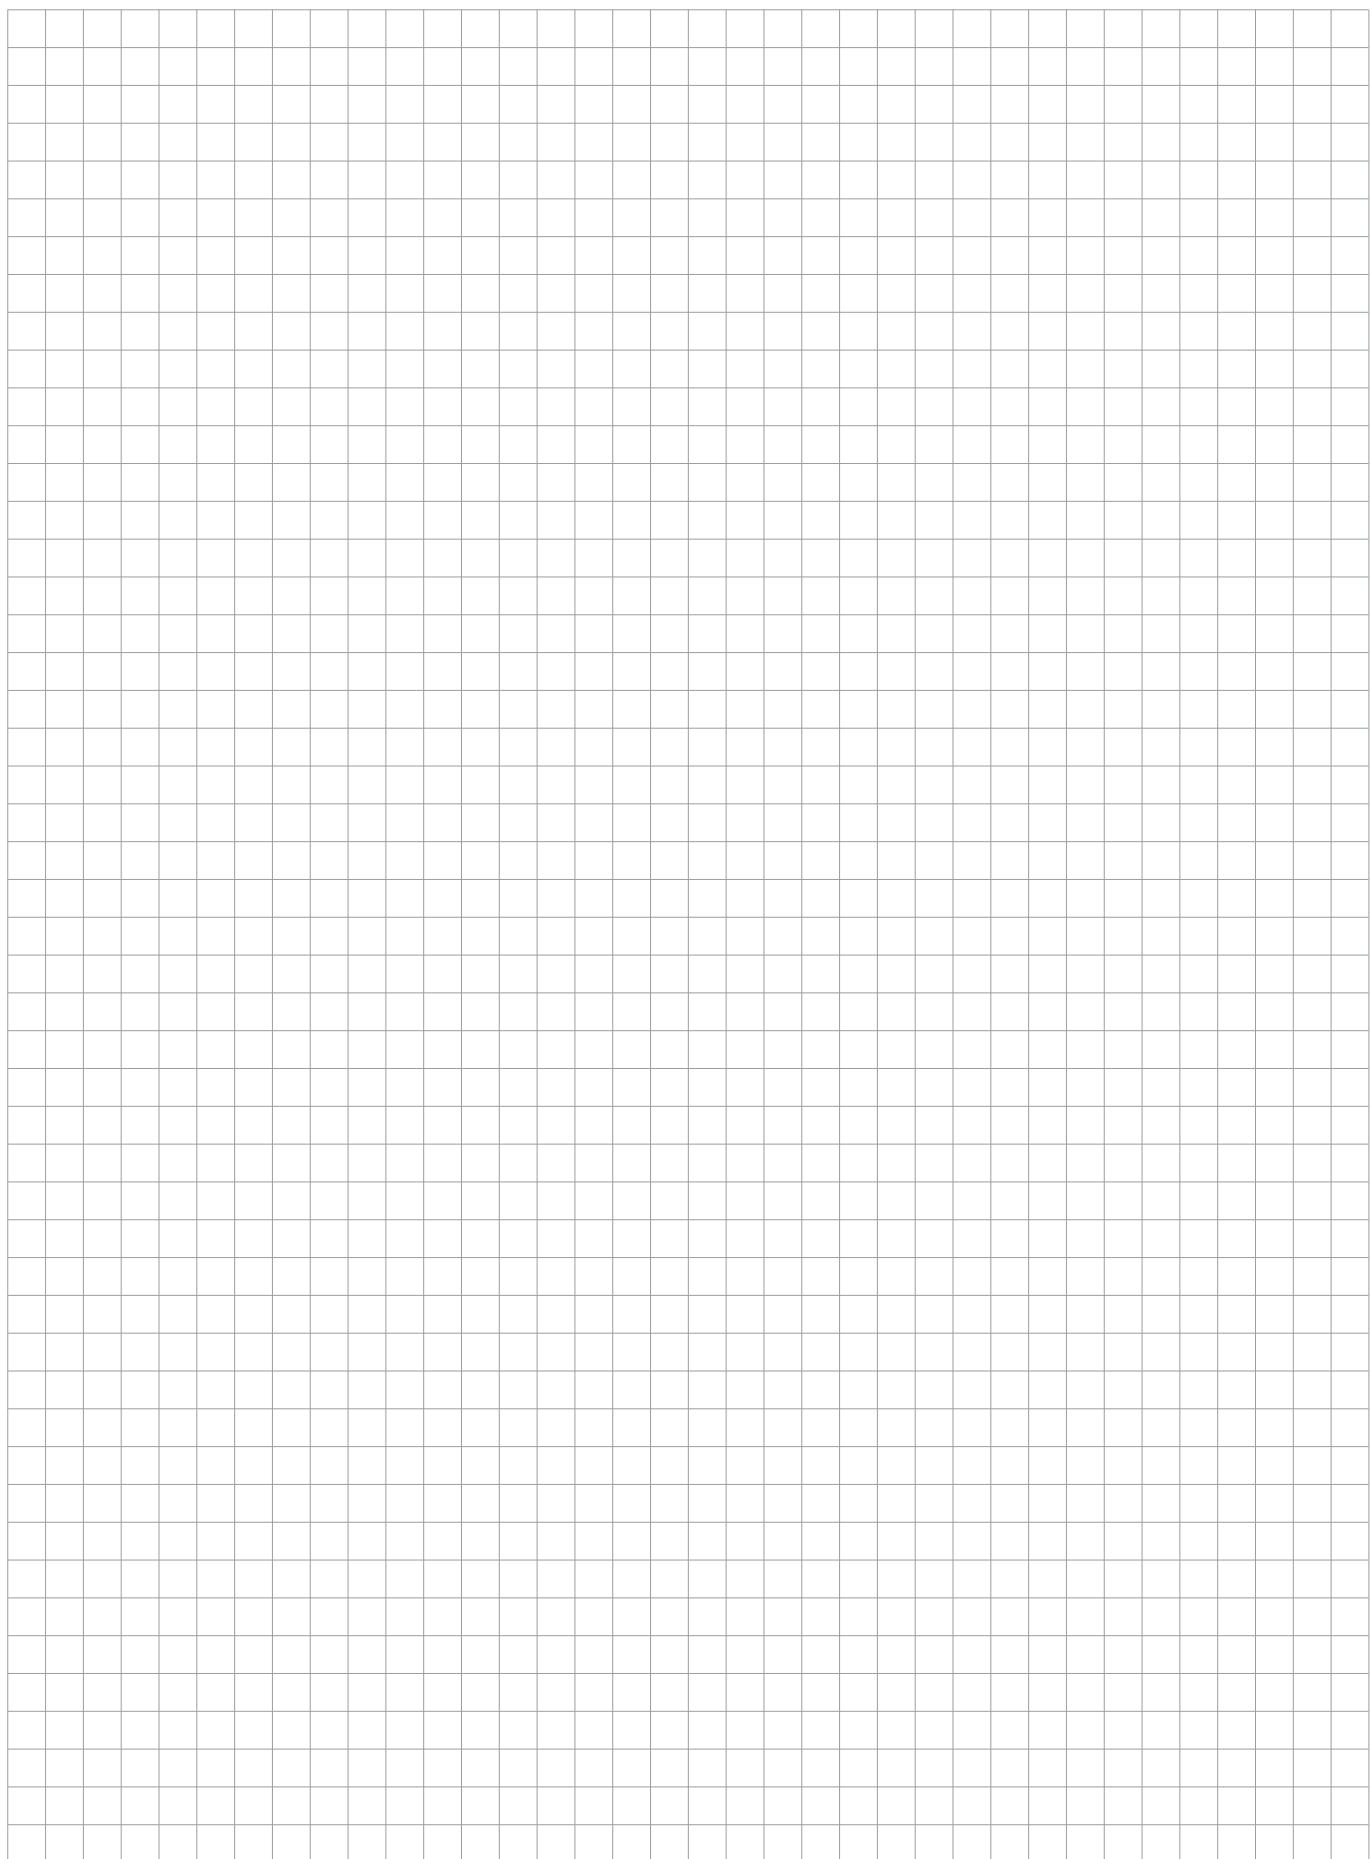

SPDs connected to LV power supply systems up to 1 000 V

Lightning Current Arresters SPDs Type 1 and Type 1 and 2




- Lightning current arresters, SPDs Type 1
- Combined lightning current and surge arresters, SPDs Type 1 and 2
- Installation mainly to main distribution boards, at the boundary of zones LPZ 0 and LPZ 1 or higher

- Line FLP-SG50 V
- Line FLP-25-T1-V
- Line FLP-B+C MAXI V
- Line FLP-EV12,5-VBH
- Line FLP-12,5 V

FLP-SG50 V(S)/1

SPD type 1 – lightning current arresters, spark gap
pluggable module, visual fault signalling, module locking

- encapsulated high-performance spark gap
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in the hardest application in heavy, chemical and energy industry
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- optional remote fault signalling (S)

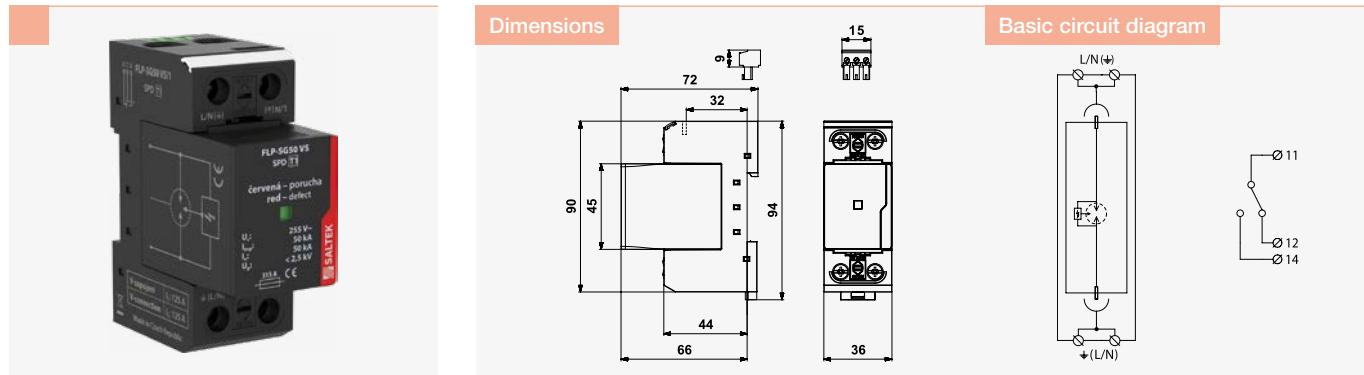

Parameter/Type	FLP-SG50 V/1	FLP-SG50 VS/1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	255 V AC	255 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	50 kA	50 kA
Nominal discharge current (8/20 μ s) I_n	50 kA	50 kA
Voltage protection level U_p	2,5 kV	2,5 kV
Ability to independently switch off the following current I_f	50 kA	50 kA
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	315 A gL/gG	315 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	no	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A04054	A04053

Spare module	FLP-SG50 V/0	FLP-SG50 VS/0
Ordering number	A04227	A04148


FLP-25-T1-V(S)/1

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- one-pole high performance lightning current arrester without follow current
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct

- or indirect lightning strikes in wide range of applications – houses, office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors

- no leakage current
- optional remote fault signalling (S)

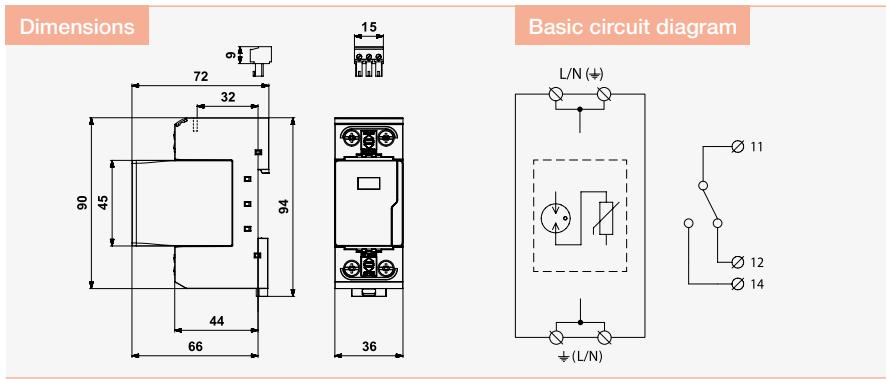

Parameter/Type	FLP-25-T1-V/1	FLP-25-T1-VS/1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	–	potential-free change-over contact
Remote indication contacts	–	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	–	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A06263	A06264

Spare module	FLP-25-T1-V/0	FLP-25-T1-V/0
Ordering number	A05453	A05453


FLP-25-T1-V(S)/1+1

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- combination of one-pole high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 1+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to

- main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office and industrial buildings

- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- no leakage current
- optional remote fault signalling (S)

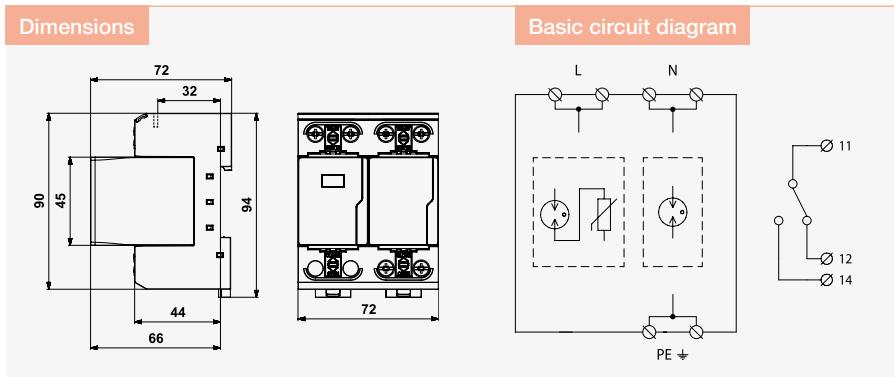

Parameter / Type	FLP-25-T1-V/1+1	FLP-25-T1-VS/1+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	260 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 µs) L-N	I_{imp}	25 kA
Lightning impulse current (10/350 µs) N-PE	I_{imp}	50 kA
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	2,2 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time L-N	t_a	100 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	–	potential-free change-over contact
Remote indication contacts	–	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	–	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A06257	A06258

Spare module	FLP-25-T1-V/0	FLP-A50N V/0	FLP-25-T1-V/0	FLP-A50N V/0
Ordering number	A05453	A03537	A05453	A03537


FLP-25-T1-V(S)/2

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- two-pole high performance lightning current arrester without follow current
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct

- or indirect lightning strikes in wide range of applications – houses, office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors

- no leakage current
- optional remote fault signalling (S)

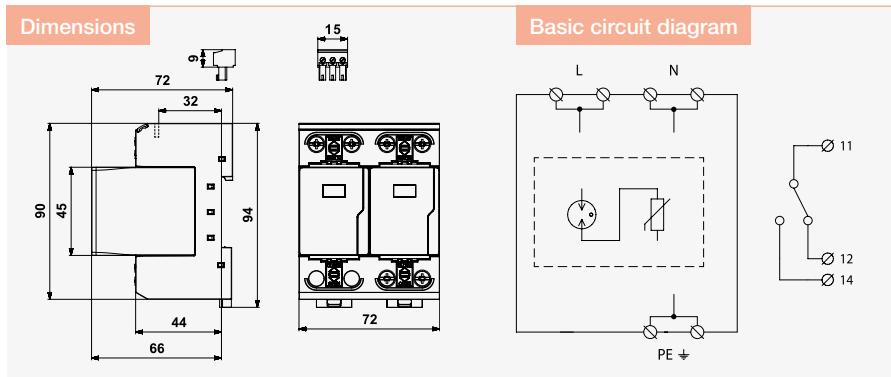


Parameter/Type	FLP-25-T1-V/2	FLP-25-T1-VS/2
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	–	potential-free change-over contact
Remote indication contacts	–	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	–	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A06259	A06260

Spare module	FLP-25-T1-V/0	FLP-25-T1-V/0
Ordering number	A05453	A05453

FLP-25-T1-V(S)/3

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- three-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- optional remote fault signalling (S)
- no follow current, no leakage current

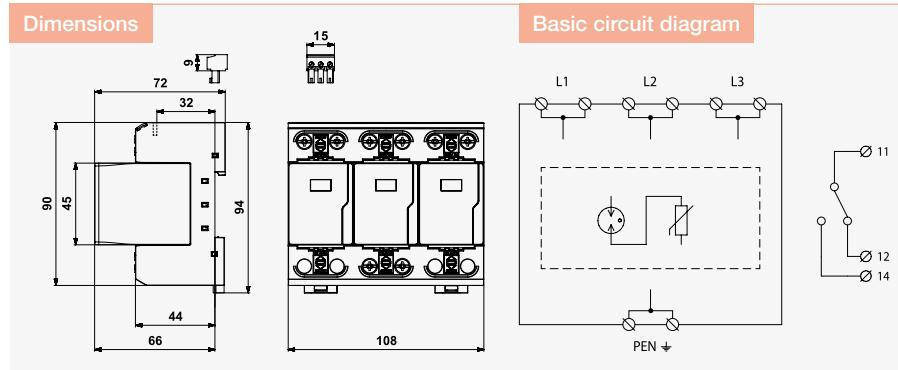


Parameter/Type	FLP-25-T1-V/3	FLP-25-T1-VS/3
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	no	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A05300	A05301

Spare module	FLP-25-T1-V/0	FLP-25-T1-V/0
Ordering number	A05453	A05453

FLP-25-T1-V(S)/4

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- four-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- optional remote fault signalling (S)
- no follow current, no leakage current

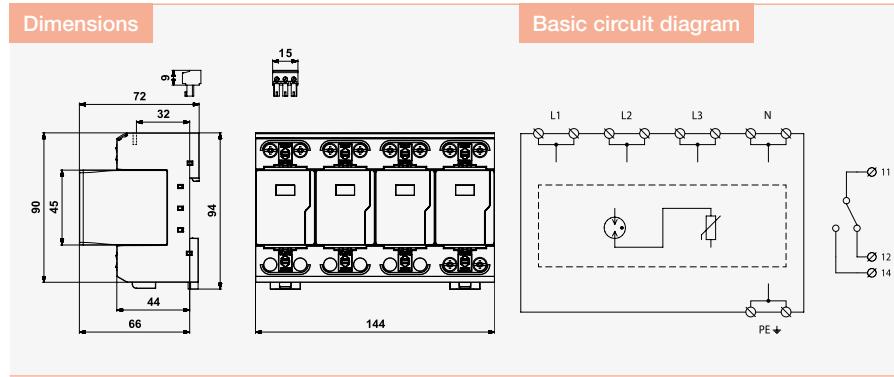

Parameter/Type	FLP-25-T1-V/4	FLP-25-T1-VS/4
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A05302	A05303

Spare module	FLP-25-T1-V/0	FLP-25-T1-V/0
Ordering number	A05453	A05453


FLP-25-T1-V(S)/3+1

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- combination of three-pole high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to

- main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office and industrial buildings

- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- optional remote fault signalling (S)
- no leakage current

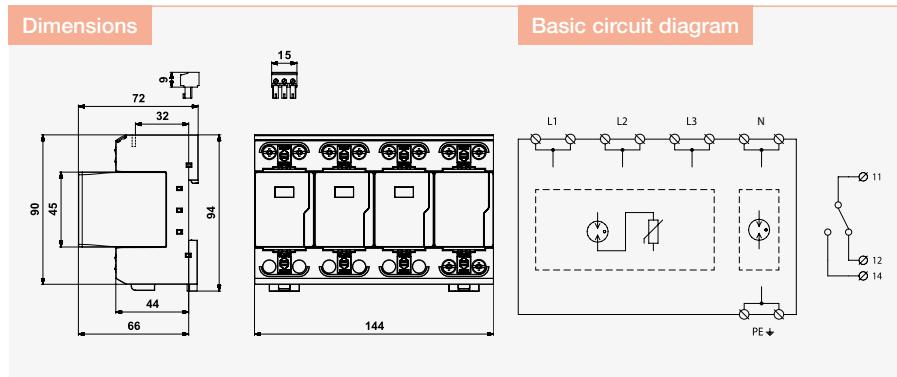


Parameter / Type	FLP-25-T1-V/3+1	FLP-25-T1-VS/3+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	260 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 µs) L-N	I_{imp}	25 kA
Lightning impulse current (10/350 µs) N-PE	I_{imp}	100 kA
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	2,2 kV
Ability to independently switch off the following current N-PE	I_{fi}	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time L-N	t_a	100 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A05304	A05305

Spare module	FLP-25-T1-V/0	FLP-A100N V/0	FLP-25-T1-V/0	FLP-A100N V/0
Ordering number	A05453	A03536	A05453	A03536

FLP-A...N VS/NPE

SPD type 1 – lightning current arresters, spark gap for N-PE
N-PE module, pluggable module

- for connection SPD Type 1 in 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes

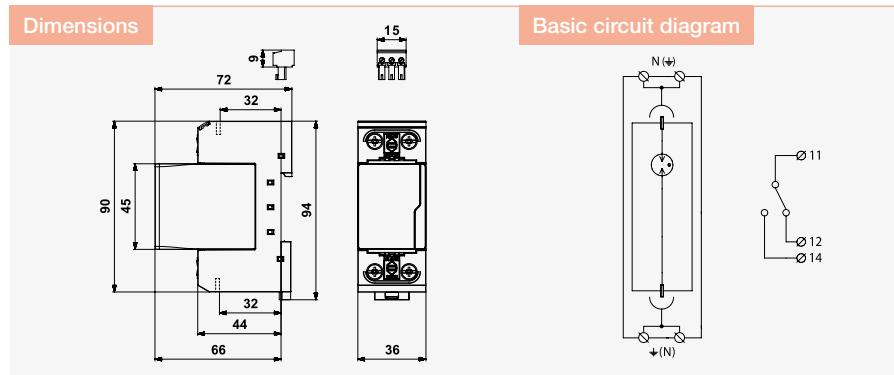


Parameter/Type	FLP-A50N VS/NPE	FLP-A100N VS/NPE
Maximum operating voltage U_c	255 V AC	255 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	50 kA	100 kA
Nominal discharge current (8/20 μ s) I_n	50 kA	100 kA
Maximum discharge current (8/20 μ s) I_{max}	100 kA	100 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Ability to independently switch off the following current I_f	0,1 kA	0,1 kA
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	remote signalling of N-PE module shows the presence of the replaceable module	remote signalling of N-PE module shows the presence of the replaceable module
Remote indication	potential-free change-over contact	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03573	A03574

Spare module	FLP-A50N V/O	FLP-A100N V/O
Ordering number	A03537	A03536

FLP-B+C MAXI V(S)/1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no follow current, no leakage current

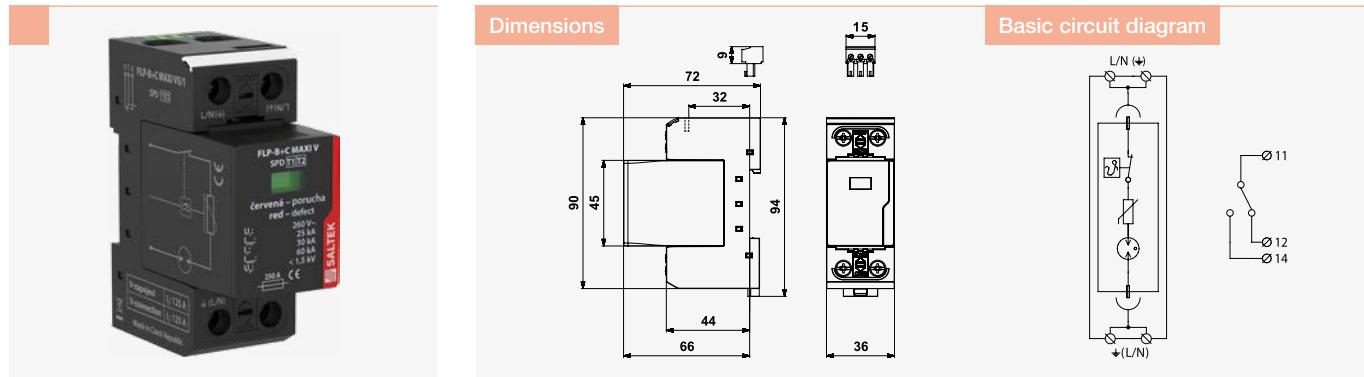

Parameter/Type	FLP-B+C MAXI V/1	FLP-B+C MAXI VS/1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Class test T3: Test voltage U_{oc}	20 kV	20 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05091	A03533

Spare module	FLP-B+C MAXI V/0	FLP-B+C MAXI V/0
Ordering number	A03535	A03535


FLP-B+C MAXI V(S)/1+1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- combination of high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 1+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to

- main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications with single-phase networks, resp. to sub-distribution boards in large buildings

- optional remote fault signalling (S)
- no leakage current

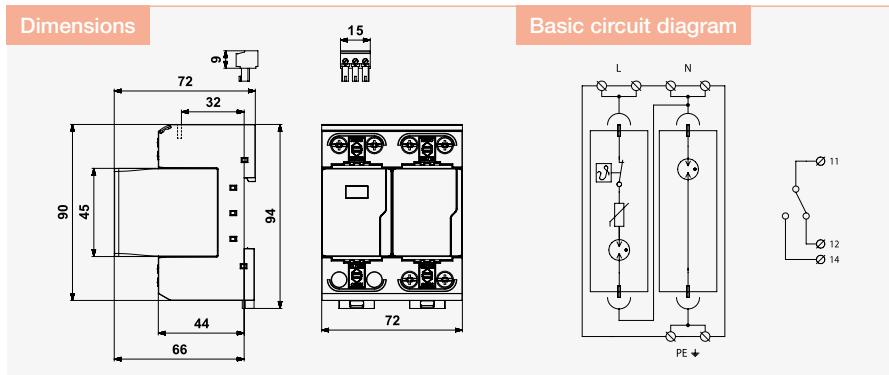


Parameter/Type	FLP-B+C MAXI V/1+1	FLP-B+C MAXI VS/1+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	260 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 µs) L-N	I_{imp}	25 kA
Lightning impulse current (10/350 µs) N-PE	I_{imp}	50 kA
Nominal discharge current (8/20 µs) L-N	I_n	30 kA
Nominal discharge current (8/20 µs) N-PE	I_n	50 kA
Maximum discharge current (8/20 µs) L-N	I_{max}	60 kA
Maximum discharge current (8/20 µs) N-PE	I_{max}	100 kA
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	2,2 kV
Class test T3: Test voltage	U_{oc}	20 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time L-N	t_a	100 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting		DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05095	A03783
Spare module	FLP-B+C MAXI V/0	FLP-A50N V/0
Ordering number	A03535	A03537

FLP-B+C MAXI V(S)/2

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no follow current, no leakage current

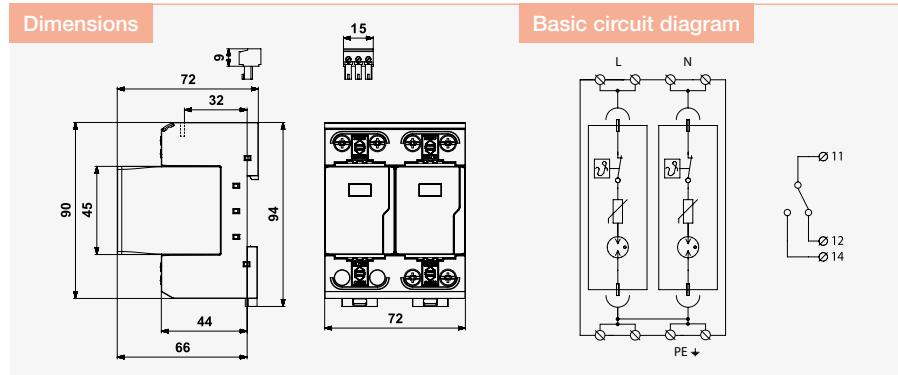


Parameter/Type	FLP-B+C MAXI V/2	FLP-B+C MAXI VS/2
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	260 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 µs)	I_{imp}	25 kA
Nominal discharge current (8/20 µs)	I_n	30 kA
Maximum discharge current (8/20 µs)	I_{max}	60 kA
Voltage protection level	U_p	1,5 kV
Class test T3: Test voltage	U_{oc}	20 kV
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication		red indication field
Remote indication		- potential-free change-over contact
Remote indication contacts		250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors		1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting		DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05092	A03784

Spare module	FLP-B+C MAXI V/0	FLP-B+C MAXI V/0
Ordering number	A03535	A03535

FLP-B+C MAXI V(S)/3

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- three-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no follow current, no leakage current

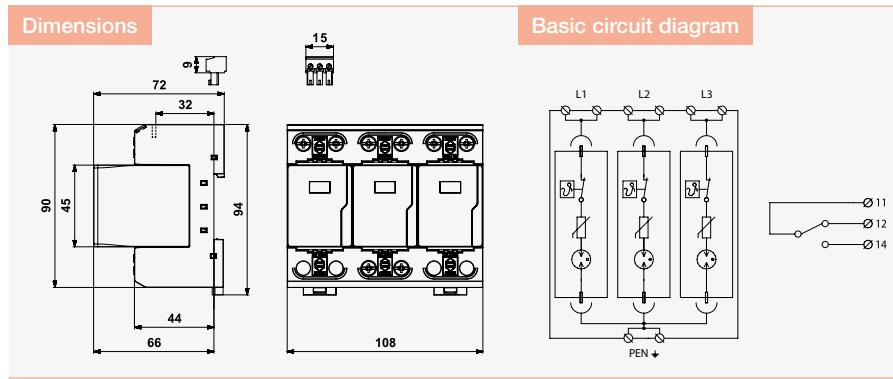


Parameter/Type	FLP-B+C MAXI V/3	FLP-B+C MAXI VS/3
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 µs) I_{imp}	25 kA	25 kA
Nominal discharge current (8/20 µs) I_n	30 kA	30 kA
Maximum discharge current (8/20 µs) I_{max}	60 kA	60 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Class test T3: Test voltage U_{oc}	20 kV	20 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05093	A03570

Spare module	FLP-B+C MAXI V/0	FLP-B+C MAXI V/0
Ordering number	A03535	A03535

FLP-B+C MAXI V(S)/4

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- four-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no follow current, no leakage current

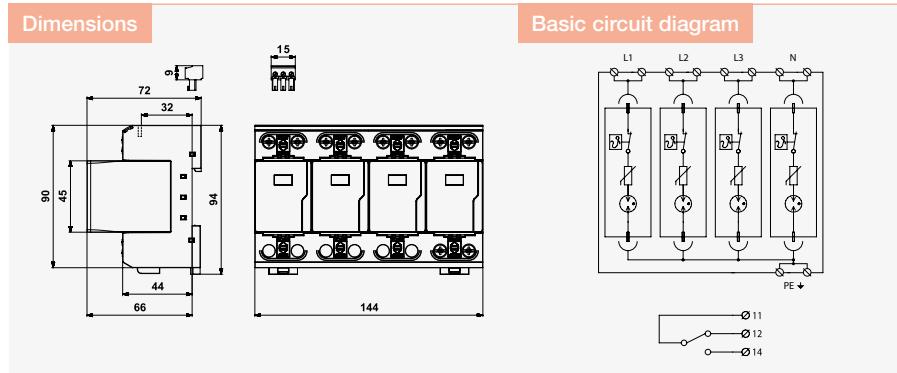

Parameter/Type	FLP-B+C MAXI V/4	FLP-B+C MAXI VS/4
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	260 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 μ s)	I_{imp}	25 kA
Nominal discharge current (8/20 μ s)	I_n	30 kA
Maximum discharge current (8/20 μ s)	I_{max}	60 kA
Voltage protection level	U_p	1,5 kV
Class test T3: Test voltage	U_{oc}	20 kV
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication		red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05094	A03571

Spare module	FLP-B+C MAXI V/0	FLP-B+C MAXI V/0
Ordering number	A03535	A03535


FLP-B+C MAXI V(S)/3+1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- combination of three-pole high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 3+1 mode
- installation at the boundary of zones

- LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office

- or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no leakage current

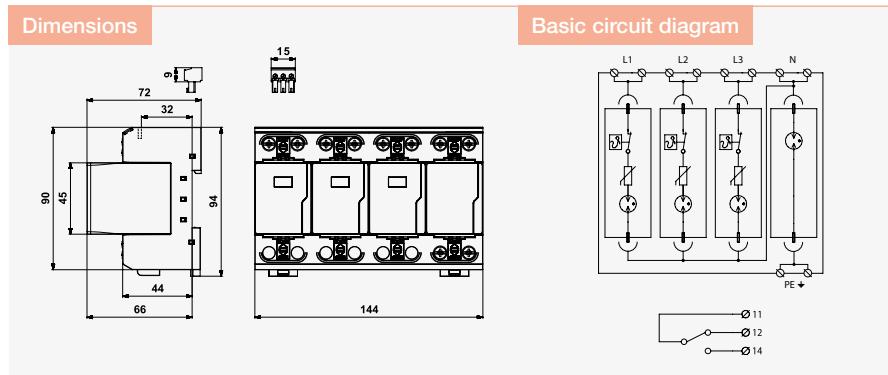


Parameter/Type	FLP-B+C MAXI V/3+1	FLP-B+C MAXI VS/3+1
Nominal voltage	U _n	230 V AC
Maximum operating voltage L-N	U _c	260 V AC
Maximum operating voltage N-PE	U _c	255 V AC
Nominal load current for "V" connection	I _L	125 A
Lightning impulse current (10/350 µs) L-N	I _{imp}	25 kA
Lightning impulse current (10/350 µs) N-PE	I _{imp}	100 kA
Nominal discharge current (8/20 µs) L-N	I _n	30 kA
Nominal discharge current (8/20 µs) N-PE	I _n	100 kA
Maximum discharge current (8/20 µs) L-N	I _{max}	60 kA
Maximum discharge current (8/20 µs) N-PE	I _{max}	100 kA
Voltage protection level mode L-N	U _p	1,5 kV
Voltage protection level mode N-PE	U _p	1,5 kV
Voltage protection level mode L-PE	U _p	2,2 kV
Ability to independently switch off the following current N-PE	I _{fi}	0,1 kA
Class test T3: Test voltage	U _{oc}	20 kV
Short-circuit current rating	I _{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time L-N	t _a	100 ns
Response time N-PE	t _a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05096	A03572
Spare module	FLP-B+C MAXI V/0	FLP-A100N V/0
Ordering number	A03535	A03536

FLP-EV12,5-VBH/.S+1

NEW

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (12,5 kA)
pluggable module, visual fault signalling, remote fault signalling

- combination of one-pole lightning current arrester and encapsulated efficiency spark gap, connected in the 1+1 or 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher
- for protection against impact of direct or indirect lightning strikes – eg. charging stations for electrical vehicles

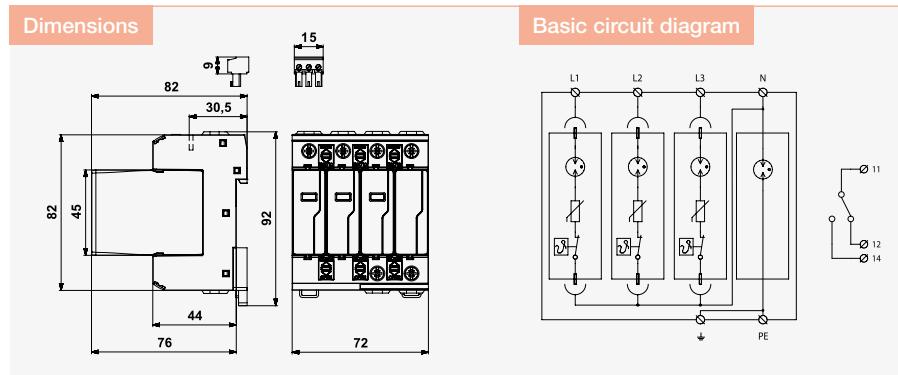


Parameter/Type	FLP-EV12,5-VBH/1S+1	FLP-EV12,5-VBH/3S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Lightning impulse current (10/350 µs) L-N	I_{imp}	12,5 kA
Lightning impulse current (10/350 µs) N-PE	I_{imp}	25 kA
Nominal discharge current (8/20 µs) L-N	I_n	30 kA
Nominal discharge current (8/20 µs) N-PE	I_n	30 kA
Maximum discharge current (8/20 µs) L-N	I_{max}	60 kA
Maximum discharge current (8/20 µs) N-PE	I_{max}	100 kA
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	2 kV
Class test T3: Test voltage	U_{oc}	20 kV
Short-circuit current rating	I_{SCCR}	50 kA
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Maximum overcurrent protection		160 A gL/gG
Response time L-N	t_a	100 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N	red indication field	red indication field
Fault indication N-PE	no	no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A07043	A07049
Spare module	FLP-12,5-VBH/0	FLP-NPE-25-VH/0
Ordering number	A07050	A07066
		A07050

FLP-12,5 V/1 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling

- varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

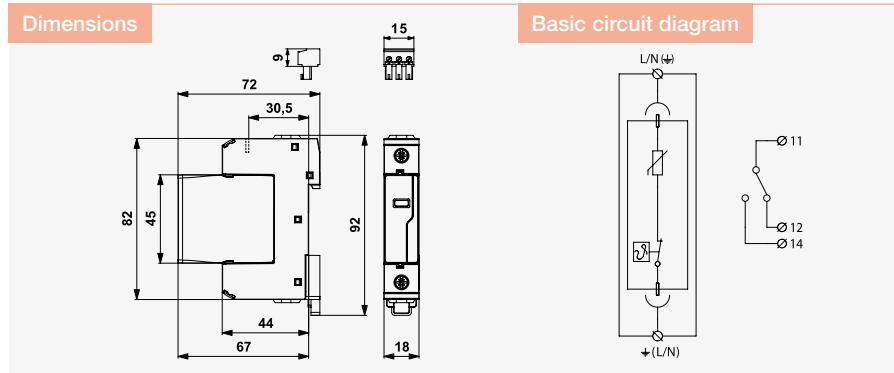

Parameter/Type	FLP-12,5 V/1	FLP-12,5 V/1 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03421	A03422


Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431

FLP-12,5-075-VH/1(S)

NEW

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling

- varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

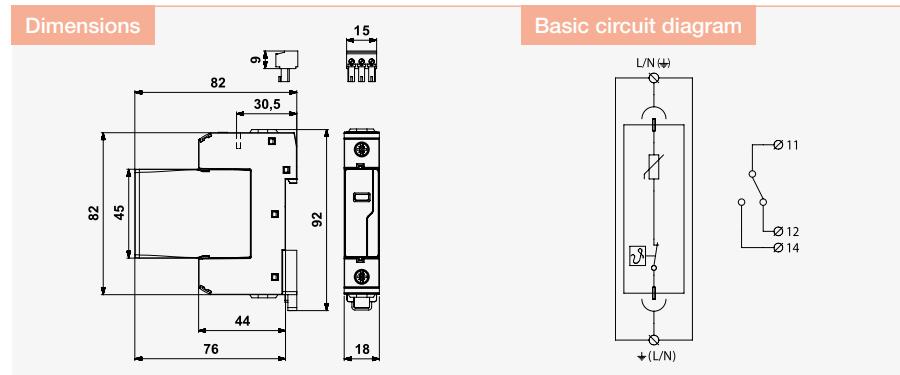


Parameter/Type	FLP-12,5-075-VH/1	FLP-12,5-075-VH/1S
Nominal voltage U_n	48 ÷ 60 V AC/DC	48 ÷ 60 V AC/DC
Maximum operating voltage U_c	75 V AC / DC	75 V AC / DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,28 kV	0,28 kV
Voltage protection level U_p	0,45 kV	0,45 kV
Short-circuit current rating I_{SCCR}	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A04168	A04169

Spare module	FLP-12,5-075-VH/0	FLP-12,5-075-VH/0
Ordering number	A04571	A04571

FLP-12,5 V/1(S)+1

SPD type 1 and type 2 - lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- combination of varistor lightning current arrester and encapsulated efficiency spark gap, connected in the 1+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

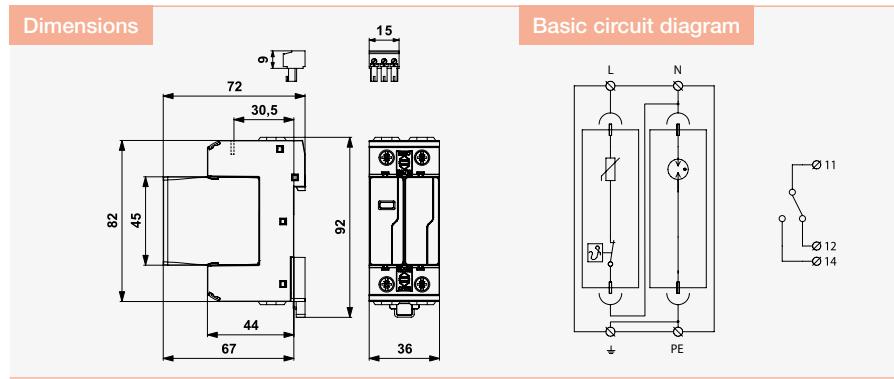


Parameter/Type	FLP-12,5 V/1+1	FLP-12,5 V/1S+1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage L-N U_c	275 V AC	275 V AC
Maximum operating voltage N-PE U_c	255 V AC	255 V AC
Lightning impulse current (10/350 µs) L-N I_{imp}	12,5 kA	12,5 kA
Lightning impulse current (10/350 µs) N-PE I_{imp}	25 kA	25 kA
Nominal discharge current (8/20 µs) L-N I_n	30 kA	30 kA
Nominal discharge current (8/20 µs) N-PE I_n	30 kA	30 kA
Maximum discharge current (8/20 µs) L-N I_{max}	60 kA	60 kA
Maximum discharge current (8/20 µs) N-PE I_{max}	60 kA	60 kA
Voltage protection level at 5 kA L-N U_p	0,9 kV	0,9 kV
Voltage protection level mode L-N U_p	1,5 kV	1,5 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV
Ability to independently switch off the following current N-PE I_{fi}	0,1 kA	0,1 kA
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication L-N	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03423	A03424

Spare module	FLP-12,5 V/0	FLP-NPE 25 V/0	FLP-12,5 V/0	FLP-NPE 25 V/0
Ordering number	A03431	A03432	A03431	A03432

FLP-12,5 V/2 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- two-pole varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

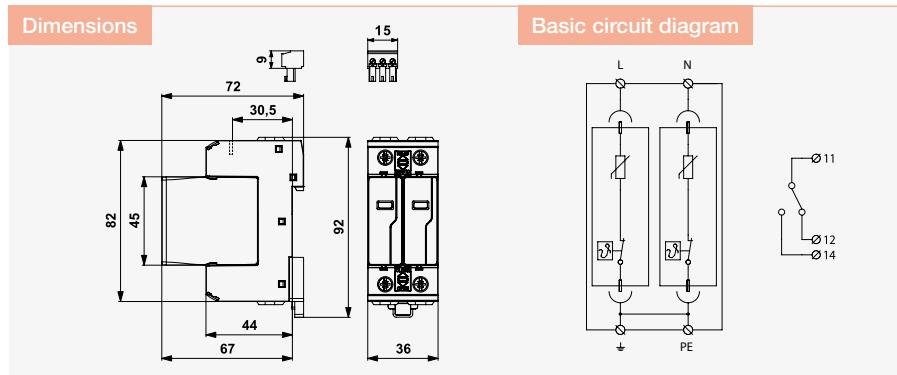

Parameter/Type	FLP-12,5 V/2	FLP-12,5 V/2 S
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	275 V AC / 350 V DC
Lightning impulse current (10/350 µs)	I_{imp}	12,5 kA
Nominal discharge current (8/20 µs)	I_n	30 kA
Maximum discharge current (8/20 µs)	I_{max}	60 kA
Voltage protection level at 5 kA	U_p	0,9 kV
Voltage protection level	U_p	1,5 kV
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		160 A gL/gG
Response time	t_a	25 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03809	A05182

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431


FLP-12,5-075-VH/2 (S)

NEW

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling

LV power systems
up to 1 000 V

- varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

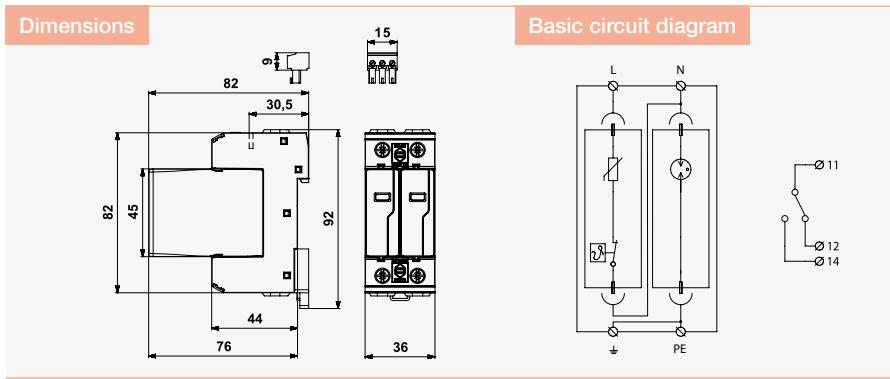


Parameter/Type	FLP-12,5-075-VH/2	FLP-12,5-075-VH/2S
Nominal voltage U_n	48 ÷ 60 V AC/DC	48 ÷ 60 V AC/DC
Maximum operating voltage U_c	75 V AC / DC	75 V AC / DC
Lightning impulse current (10/350 µs) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 µs) I_n	20 kA	20 kA
Maximum discharge current (8/20 µs) I_{max}	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,28 kV	0,28 kV
Voltage protection level U_p	0,45 kV	0,45 kV
Short-circuit current rating I_{SCCR}	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm² / 35 mm²	1 mm² / 35 mm²
Cross-section of connected conductors stranded (min/max)	1 mm² / 25 mm²	1 mm² / 25 mm²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A04170	A04171

Spare module	FLP-12,5-075-VH/0	FLP-12,5-075-VH/0
Ordering number	A04571	A04571

FLP-12,5 V/3 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- three-pole varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

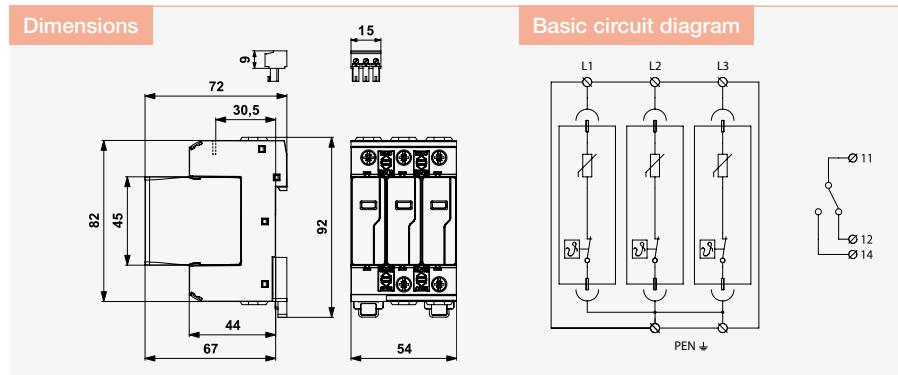


Parameter/Type	FLP-12,5 V/3	FLP-12,5 V/3 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03425	A03426

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431

FLP-12,5 V/4 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- four-pole varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

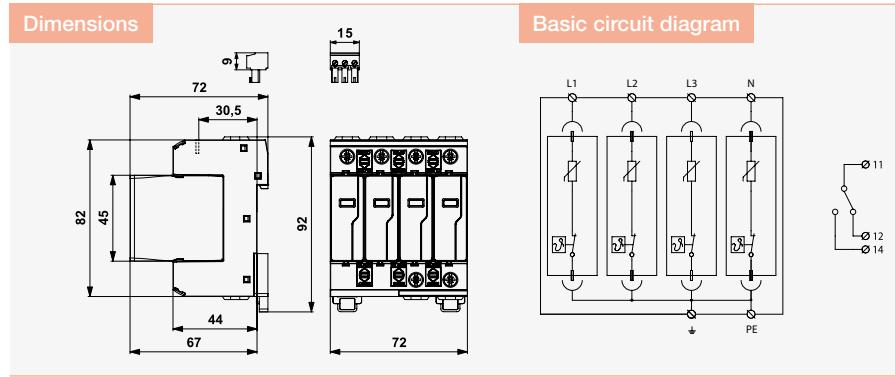



Parameter/Type	FLP-12,5 V/4	FLP-12,5 V/4 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCOR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03429	A03430

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431

FLP-12,5 V/3(S)+1

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- combination of varistor lightning current arrester and encapsulated efficiency spark gap, connected in the 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

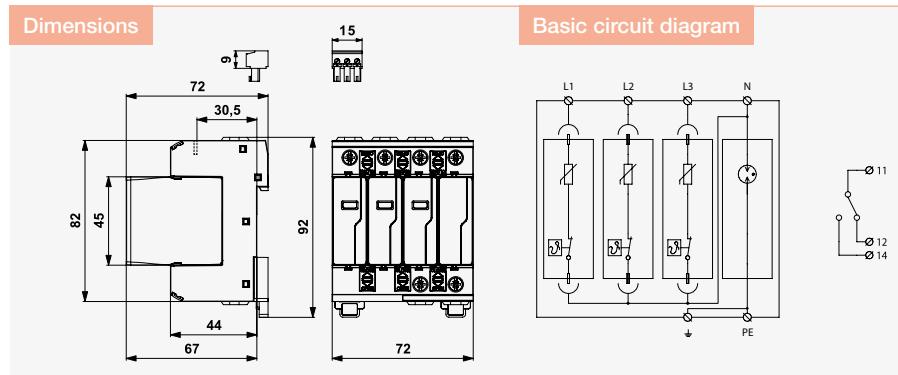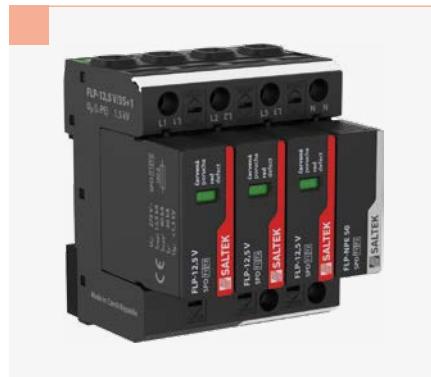


Parameter/Type	FLP-12,5 V/3+1	FLP-12,5 V/3S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Lightning impulse current (10/350 μ s) L-N	I_{imp}	12,5 kA
Lightning impulse current (10/350 μ s) N-PE	I_{imp}	50 kA
Nominal discharge current (8/20 μ s) L-N	I_n	30 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	50 kA
Maximum discharge current (8/20 μ s) L-N	I_{max}	60 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max}	100 kA
Voltage protection level at 5 kA L-N	U_p	0,9 kV
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	1,5 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		160 A gL/gG
Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors		1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03427	A03428

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431


FLP-...V/0

Replacement modules of SPD type 1
and type 1 and 2

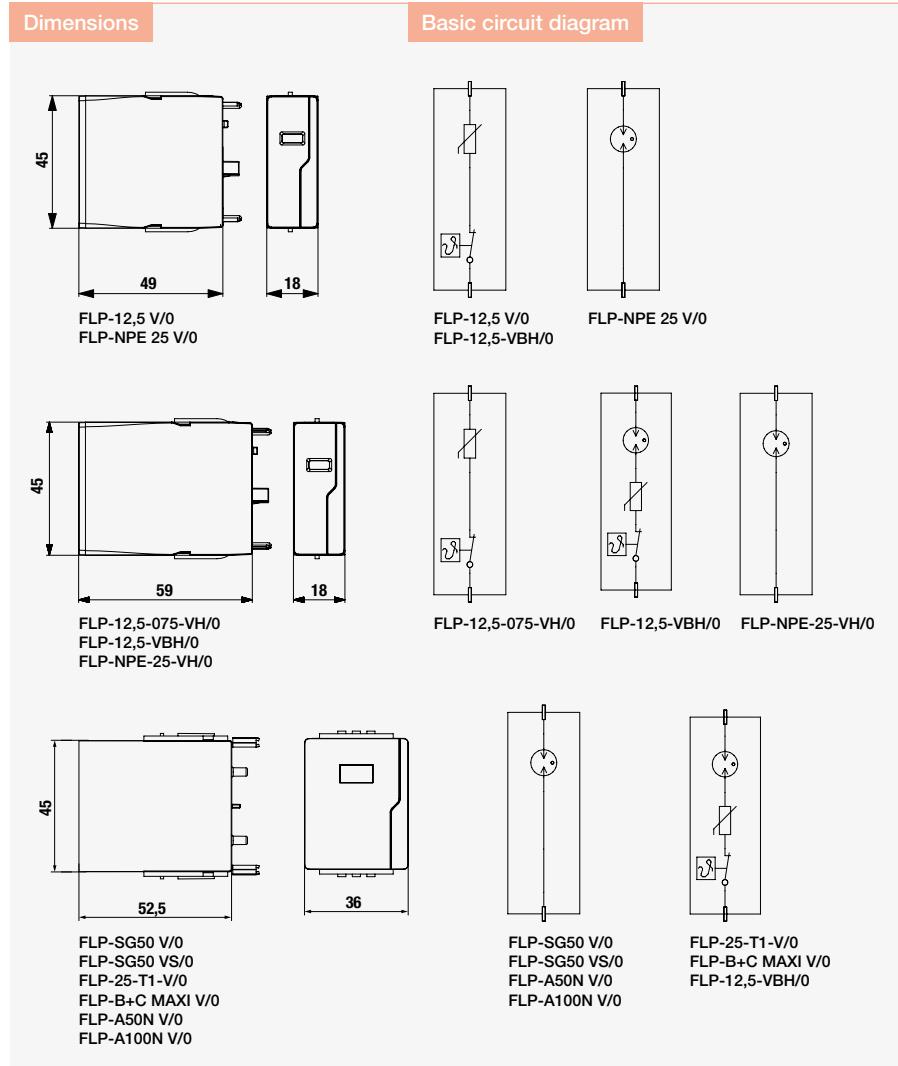

Type	Ordering number
FLP-SG50 V/0	A04227
FLP-SG50 VS/0	A04148
FLP-25-T1-V/0	A05453
FLP-A50N V/0	A03537
FLP-A100N V/0	A03536
FLP-B+C MAXI V/0	A03535
FLP-12,5 V/0	A03431
FLP-NPE 25 V/0	A03432
FLP-12,5-075-VH/0	A04571
FLP-12,5-VBH/0	A07050
FLP-NPE-25-VH/0	A07066

Notes

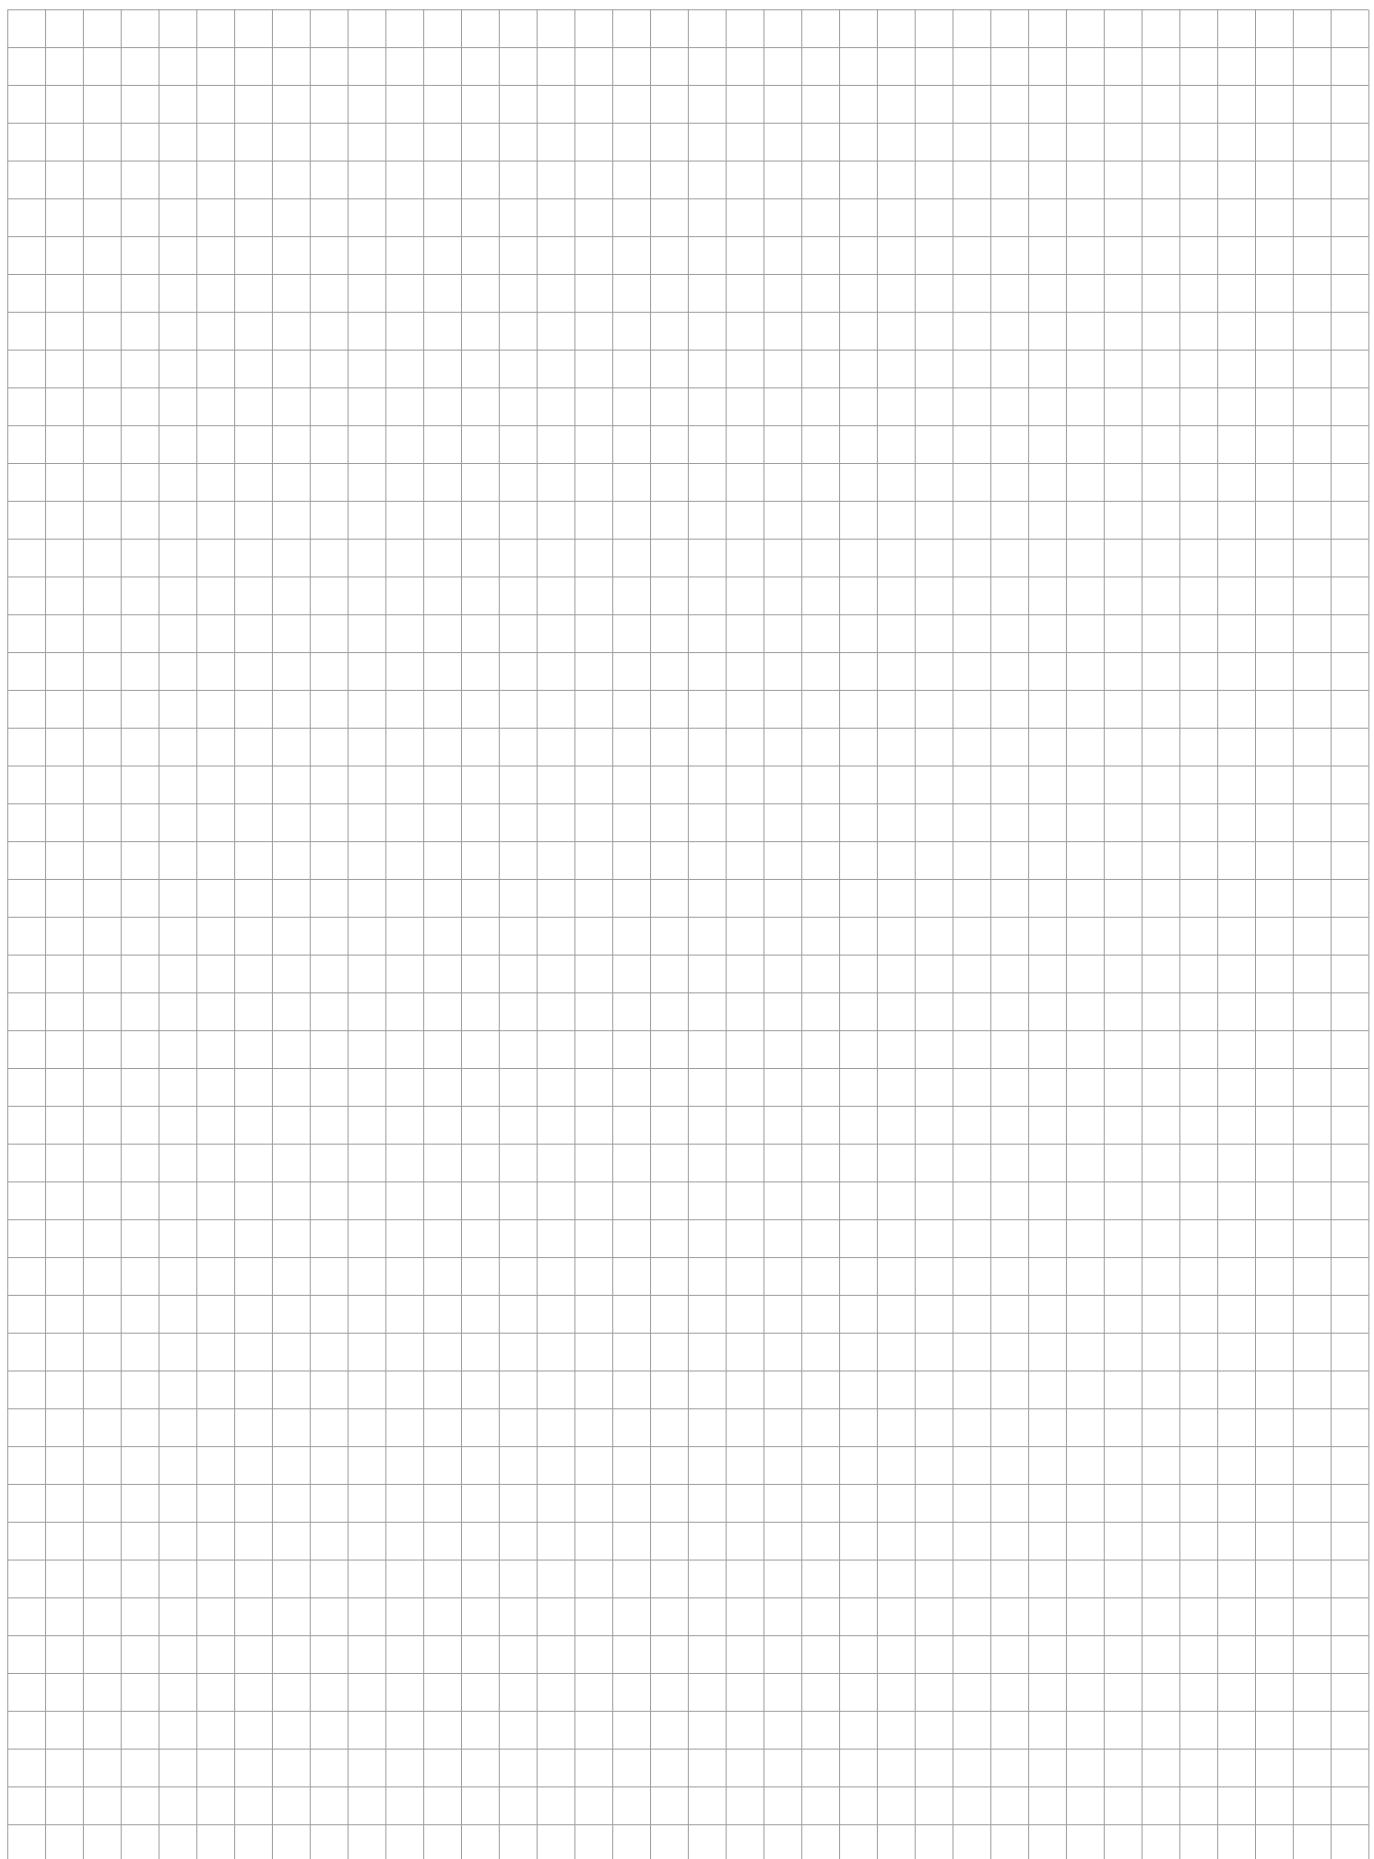A large grid of squares, approximately 20 columns by 20 rows, intended for handwritten notes.

SPDs connected to LV power supply systems up to 1 000 V



Surge Arresters SPDs Type 2




- Surge Arresters, SPDs Type 2
- Suitable for TN, TT, IT networks
- Installation mainly to sub-distribution boards
- Line SLP-... V
- Line SLP-... VB

SLP-... V/1

SPD type 2 – surge arrester, MOV
pluggable module, visual fault signalling

- varistor surge arrester
- installation to LV installations, especially to sub-distribution boards

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

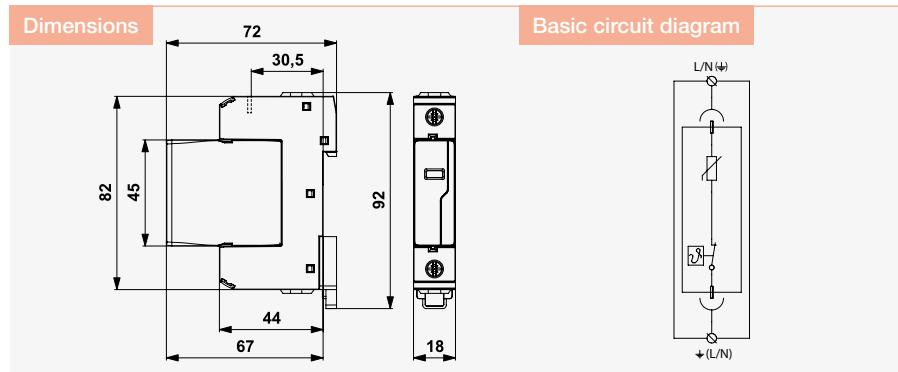

Parameter/Type	SLP-075 V/1	SLP-150 V/1	SLP-275 V/1	SLP-385 V/1	SLP-440 V/1	SLP-600 V/1
Nominal voltage U_n	60 V AC	120 V AC	230 V AC	-	400 V AC	230 ÷ 690 V AC
Maximum operating voltage of varistor	-	-	-	-	-	880 V AC
Maximum operating voltage U_c	75 V AC / 100 V DC	150 V AC / 200 V DC	275 V AC / 350 V DC	385 V AC / 500 V DC	440 V AC / 585 V DC	760 V AC
Nominal discharge current (8/20 μ s) I_n	15 kA	15 kA	20 kA	20 kA	20 kA	15 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA	40 kA	40 kA	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,3 kV	0,45 kV	0,9 kV	1,3 kV	1,5 kV	2,7 kV
Voltage protection level U_p	0,4 kV	0,7 kV	1,35 kV	1,8 kV	1,9 kV	3,2 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA	50 kA	50 kA	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG	160 A gL/gG	160 A gL/gG	125 A gL/gG	100 A gL/gG
Response time t_a	25 ns	25 ns	25 ns	25 ns	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field	red indication field	red indication field	red indication field
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2					
Ordering number	A01815	A05185	A01617	A01955	A01817	A03301

Spare module	SLP-075 V/0	SLP-150 V/0	SLP-275 V/0	SLP-385 V/0	SLP-440 V/0	SLP-600 V/0
Ordering number	A01811	A05193	A02368	A01950	A01813	A03303


SLP-... V/1 S

SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, remote fault signalling

- varistor surge arrester
- installation to LV installations, especially to sub-distribution boards
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

- remote fault signalling (S)

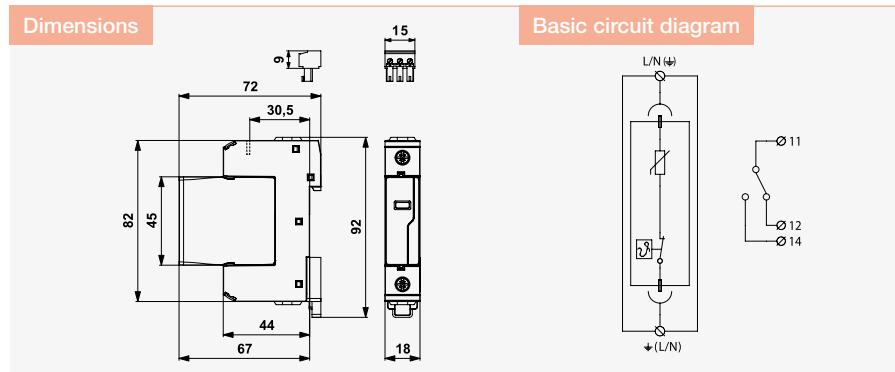


Parameter/Type	SLP-075 V/1 S	SLP-150 V/1 S	SLP-275 V/1 S	SLP-385 V/1 S	SLP-440 V/1 S	SLP-600 V/1 S
Nominal voltage U_n	60 V AC	120 V AC	230 V AC	-	400 V AC	230 ÷ 690 V AC
Maximum operating voltage of varistor	-	-	-	-	-	880 V AC
Maximum operating voltage U_c	75 V AC / 100 V DC	150 V AC / 200 V DC	275 V AC / 350 V DC	385 V AC / 500 V DC	440 V AC / 585 V DC	760 V AC
Nominal discharge current (8/20 μ s) I_n	15 kA	15 kA	20 kA	20 kA	20 kA	15 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA	40 kA	40 kA	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,3 kV	0,45 kV	0,9 kV	1,3 kV	1,5 kV	2,7 kV
Voltage protection level U_p	0,4 kV	0,7 kV	1,35 kV	1,8 kV	1,9 kV	3,2 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA	50 kA	50 kA	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG	160 A gL/gG	160 A gL/gG	125 A gL/gG	100 A gL/gG
Response time t_a	25 ns	25 ns	25 ns	25 ns	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field	red indication field	red indication field	red indication field
Remote indication	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2					
Ordering number	A01823	A05186	A01618	A02771	A01825	A03302

Spare module	SLP-075 V/0	SLP-150 V/0	SLP-275 V/0	SLP-385 V/0	SLP-440 V/0	SLP-600 V/0
Ordering number	A01811	A05193	A02368	A01950	A01813	A03303

SLP-275 V/1(S)+1

SPD type 2 – surge arrester, MOV
pluggable module, visual fault signalling, module locking

- combination of varistor surge arrester and encapsulated spark gap, connected in the 1+1 mode
- installation to LV installations, especially to sub-distribution boards in TT and also TN-S systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

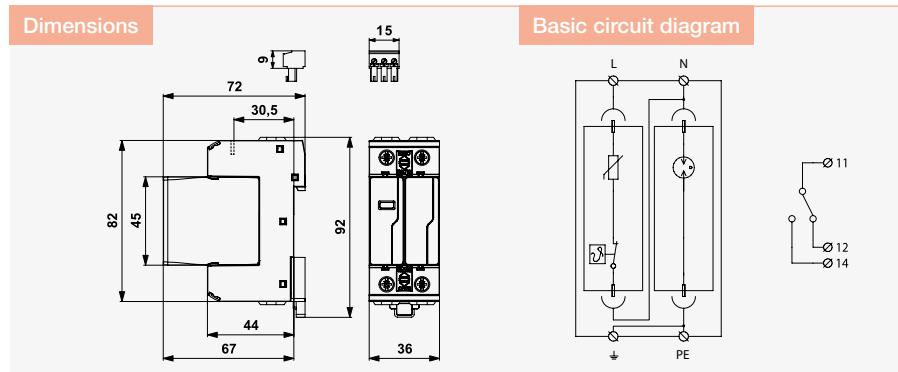

Parameter/Type	SLP-275 V/1+1	SLP-275 V/1S+1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage L-N U_c	275 V AC	275 V AC
Maximum operating voltage N-PE U_c	255 V AC	255 V AC
Nominal discharge current (8/20 μ s) L-N I_n	20 kA	20 kA
Nominal discharge current (8/20 μ s) N-PE I_n	20 kA	20 kA
Maximum discharge current (8/20 μ s) L-N I_{max}	40 kA	40 kA
Maximum discharge current (8/20 μ s) N-PE I_{max}	40 kA	40 kA
Voltage protection level at 5 kA L-N U_p	0,9 kV	0,9 kV
Voltage protection level mode L-N U_p	1,35 kV	1,35 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV
Ability to independently switch off the following current N-PE I_f	0,1 kA	0,1 kA
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication L-N	red indication field	red indication field
Fault indication N-PE	no	no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A01948	A02491

Spare module	SLP-275 V/0	SLP-NPE V/0	SLP-275 V/0	SLP-NPE V/0
Ordering number	A02368	A03722	A02368	A03722

SLP-... V/2 (S)

NEW


SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking

- two-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN-S systems

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

- optional remote fault signalling (S)

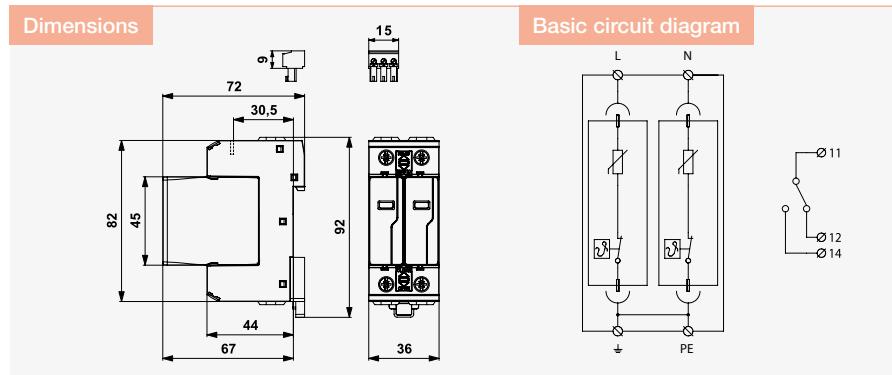

Parameter/Type	SLP-075 V/2	SLP-075 V/2 S	SLP-275 V/2	SLP-275 V/2 S
Nominal voltage U_n	60 V AC	60 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	75 V AC / 100 V DC	75 V AC / 100 V DC	275 V AC / 350 V DC	275 V AC / 350 V DC
Nominal discharge current (8/20 μ s) I_n	15 kA	15 kA	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,3 kV	0,3 kV	0,9 kV	0,9 kV
Voltage protection level U_p	0,4 kV	0,4 kV	1,35 kV	1,35 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field	red indication field
Remote indication	-	potential-free change-over contact	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²	-	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard		EN 61643-11:2012, IEC 61643-11:2011 / T2		
Ordering number	A07022	A07023	A01619	A05183

Spare module	SLP-075 V/0	SLP-075 V/0	SLP-275 V/0	SLP-275 V/0
Ordering number	A01811	A01811	A02368	A02368

SLP-275 V/3 (S)


SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking

- three-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN-C systems

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

- optional remote fault signalling (S)

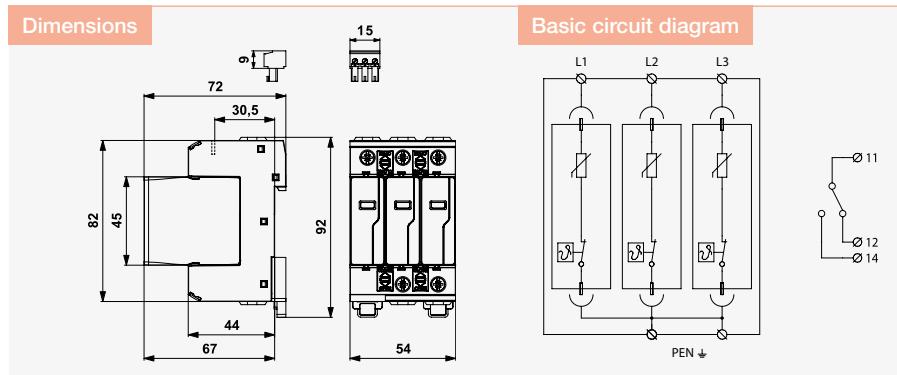

Parameter/Type	SLP-275 V/3	SLP-275 V/3 S
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	275 V AC / 350 V DC
Nominal discharge current (8/20 μ s)	I_n	20 kA
Maximum discharge current (8/20 μ s)	I_{max}	40 kA
Voltage protection level at 5 kA	U_p	0,9 kV
Voltage protection level	U_p	1,35 kV
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		160 A gL/gG
Response time	t_a	25 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication		red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors		1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting		DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A01760	A01761

Spare module	SLP-275 V/0	SLP-275 V/0
Ordering number	A02368	A02368

SLP-275 V/4 (S)


SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking

- four-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN-S systems

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

- optional remote fault signalling (S)

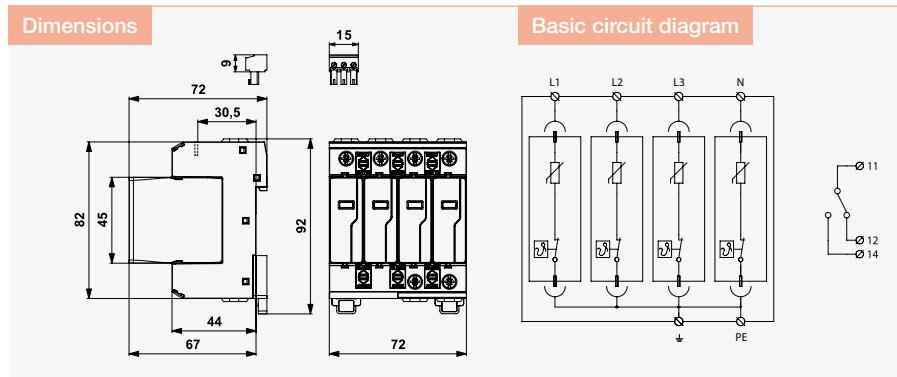


Parameter/Type	SLP-275 V/4	SLP-275 V/4 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Nominal discharge current (8/20 μ s) I_n	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,35 kV	1,35 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A01722	A01763

Spare module	SLP-275 V/0	SLP-275 V/0
Ordering number	A02368	A02368

SLP-275 V/3(S)+1

SPD type 2 – surge arrester, MOV
pluggable module, visual fault signalling, module locking

- combination of varistor surge arrester and encapsulated spark gap, connected in the 3+1 mode
- installation to LV installations, especially to sub-distribution boards in TT and also TN-S systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

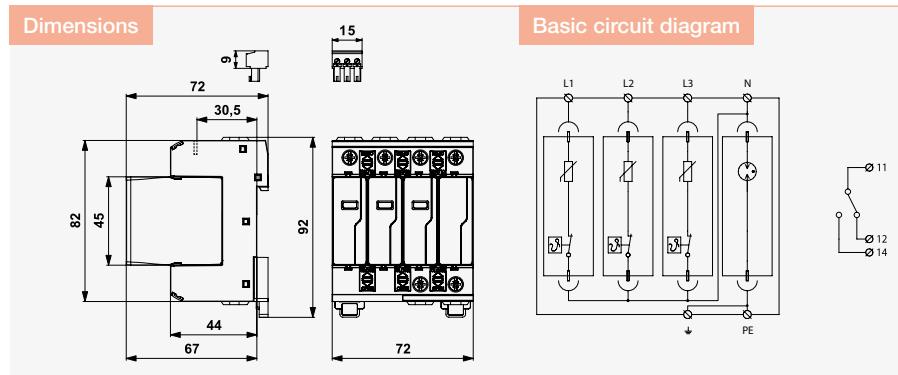

Parameter/Type	SLP-275 V/3+1	SLP-275 V/3S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal discharge current (8/20 μ s) L-N	I_n	20 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	20 kA
Maximum discharge current (8/20 μ s) L-N	I_{max}	40 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max}	40 kA
Voltage protection level at 5 kA L-N	U_p	0,9 kV
Voltage protection level mode L-N	U_p	1,35 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	1,5 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		160 A gL/gG
Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting		DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A01946	A02002


Spare module	SLP-275 V/0	SLP-NPE V/0	SLP-275 V/0	SLP-NPE V/0
Ordering number	A02368	A03722	A02368	A03722

SLP-... V/3

SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking

- three-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN, IT systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- suitable for the protection of wind farms and inverters

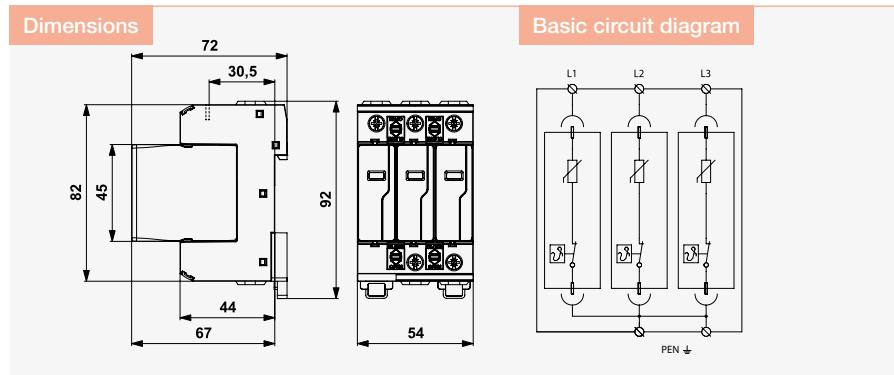

Parameter/Type	SLP-385 V/3	SLP-440 V/3	SLP-600 V/3
Nominal voltage U_n	230 V AC	400 V AC	230÷690 V AC
Maximum operating voltage U_c	385 V AC / 500 V DC	440 V AC / 585 V DC	760 V AC
Nominal load current I_n	20 kA	20 kA	15 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA	40 kA
Voltage protection level at 5 kA U_p	1,3 kV	1,5 kV	2,7 kV
Voltage protection level U_p	1,8 kV	1,9 kV	3,2 kV
Short-circuit current rating I_{SCCR}	50 kA	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	125 A gL/gG	100 A gL/gG
Response time t_a	25 ns	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	– 40 °C / 80 °C	– 40 °C / 80 °C	– 40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2
Ordering number	A01952	A01910	A06076


Spare module	SLP-385 V/0	SLP-440 V/0	SLP-600 V/0
Ordering number	A01950	A01813	A03303

SLP-... V/3 S

SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking, remote fault signalling

- three-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN, IT systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- suitable for the protection of wind farms and inverters

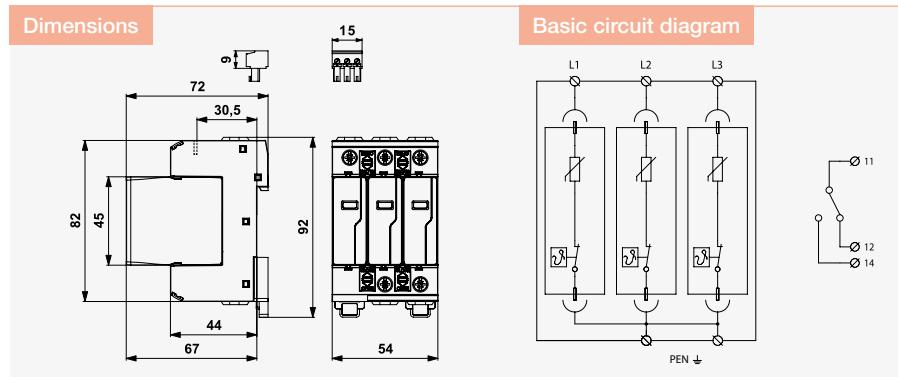

Parameter/Type	SLP-385 V/3 S	SLP-440 V/3 S	SLP-600 V/3 S
Nominal voltage	U_n 230 V AC	 400 V AC	 230÷690 V AC
Maximum operating voltage	U_c 385 V AC / 500 V DC	 440 V AC / 585 V DC	 760 V AC
Nominal load current	I_n 20 kA	 20 kA	 15 kA
Maximum discharge current (8/20 μ s)	I_{max} 40 kA	 40 kA	 40 kA
Voltage protection level at 5 kA	U_p 1,3 kV	 1,5 kV	 2,7 kV
Voltage protection level	U_p 1,8 kV	 1,9 kV	 3,2 kV
Short-circuit current rating	I_{SCCR} 50 kA	 25 kA	 25 kA
Maximum overcurrent protection	 160 A gL/gG	 125 A gL/gG	 100 A gL/gG
Response time	t_a 25 ns	 25 ns	 25 ns
Cross-section of connected conductors solid (min/max)	 1 mm ² / 35 mm ²	 1 mm ² / 35 mm ²	 1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	 1 mm ² / 25 mm ²	 1 mm ² / 25 mm ²	 1 mm ² / 25 mm ²
Fault indication	 red indication field	 red indication field	 red indication field
Remote indication	 potential-free change-over contact	 potential-free change-over contact	 potential-free change-over contact
Remote indication contacts	 250 V / 0,5 A AC, 250 V / 0,1 A DC	 250 V / 0,5 A AC, 250 V / 0,1 A DC	 250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	 1,5 mm ²	 1,5 mm ²	 1,5 mm ²
Degree of protection	 IP 20	 IP 20	 IP 20
Range of operating temperatures (min/max)	 – 40 °C / 80 °C	 – 40 °C / 80 °C	 – 40 °C / 80 °C
Mounting	 DIN rail 35 mm	 DIN rail 35 mm	 DIN rail 35 mm
According to standard	 EN 61643-11 ed.2 / T2	 EN 61643-11 ed.2 / T2	 EN 61643-11 ed.2 / T2
Ordering number	 A02633	 A01913	 A06305

Spare module	SLP-385 V/0	SLP-440 V/0	SLP-600 V/0
Ordering number	A01950	A01813	A03303


SLP-... VB/1

SPD type 2 – surge arrester, combination type
pluggable module, visual fault signalling

- combined type surge arrester (serial combination of varistor+GDT)
- installation to LV installations, especially to sub-distribution boards in areas with unstable grid voltage and where diesel

- generators are used, suitable also for measuring circuits
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike

- in areas with higher storm activity or switching overvoltages or as the first stage of for protection for measuring circuits
- no leakage current

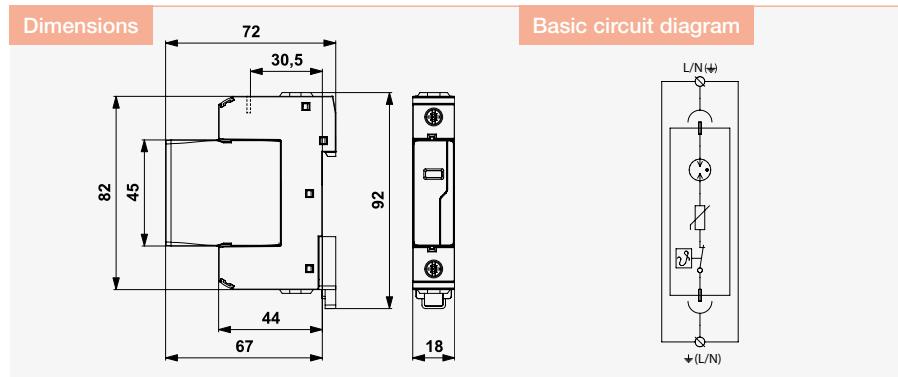

Parameter/Type	SLP-075 VB/1	SLP-130 VB/1	SLP-275 VB/1
Nominal voltage U_n	-	110 V AC	230 V AC
Maximum operating voltage U_c	75 V AC / 100 V DC	135 V AC / 175 V DC	275 V AC / 350 V DC
Nominal discharge current (8/20 μ s) I_n	15 kA	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	25 kA	25 kA	25 kA
Voltage protection level U_p	0.6 kV	0.7 kV	1.2 kV
Voltage protection level at 5 kA U_p	0.3 kV	0.5 kV	0.9 kV
Short-circuit current rating I_{SCCR}	35 kA	35 kA	35 kA
Maximum overcurrent protection	125 A gL/gG	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2		
Ordering number	A02155	A02182	A01944

Spare module	SLP-075 VB/0	SLP-130 VB/0	SLP-275 VB/0
Ordering number	A03312	A03313	A03314


SLP-... VB/1 S

SPD type 2 – surge arrester, combination type
pluggable module, visual fault signalling, remote fault signalling

- combined type surge arrester (serial combination of varistor+GDT)
- installation to LV installations, especially to sub-distribution boards in areas with unstable grid voltage and where diesel

- generators are used, suitable also for measuring circuits
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike in

- areas with higher storm activity or switching overvoltages or as the first stage of for protection for measuring circuits
- no leakage current
- remote fault signalling (S)

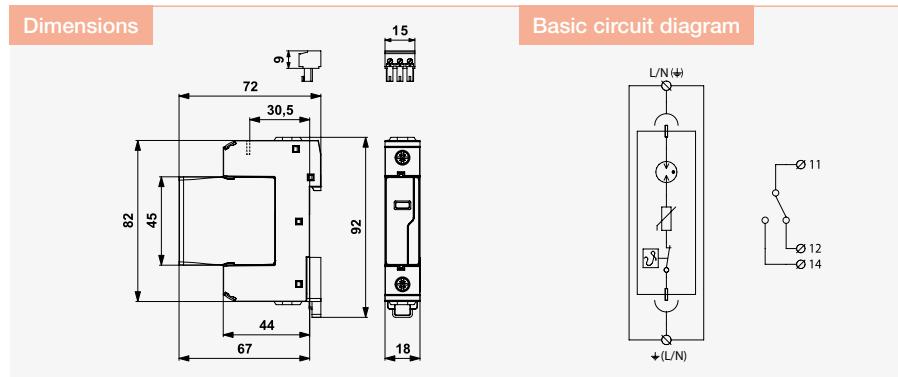

Parameter/Type	SLP-075 VB/1 S	SLP-130 VB/1 S	SLP-275 VB/1 S
Nominal voltage U_n	-	110 V AC	230 V AC
Maximum operating voltage U_c	75 V AC / 100 V DC	135 V AC / 175 V DC	275 V AC / 350 V DC
Nominal discharge current (8/20 μ s) I_n	15 kA	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	25 kA	25 kA	25 kA
Voltage protection level U_p	0.6 kV	0.7 kV	1.2 kV
Voltage protection level at 5 kA U_p	0.3 kV	0.5 kV	0.9 kV
Short-circuit current rating I_{SCCR}	35 kA	35 kA	35 kA
Maximum overcurrent protection	125 A gL/gG	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field
Remote indication	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2		
Ordering number	A02156	A02996	A01945

Spare module	SLP-075 VB/0	SLP-130 VB/0	SLP-275 VB/0
Ordering number	A03312	A03313	A03314

SLP-275 VB/3(S)+1

SPD type 2 – surge arrester, combination type
pluggable module, visual fault signalling, module locking


- combination of combined type surge arrester (serial combination of varistor+GDT) and encapsulated spark gap, connected in the 3+1 mode
- installation to LV installations, especially to sub-distribution boards in areas with

unstable grid voltage and where diesel generators are used, suitable also for measuring circuits

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike

in areas with higher storm activity or switching overvoltages or as the first stage of for protection for measuring circuits

- no leakage current
- optional remote fault signalling (S)

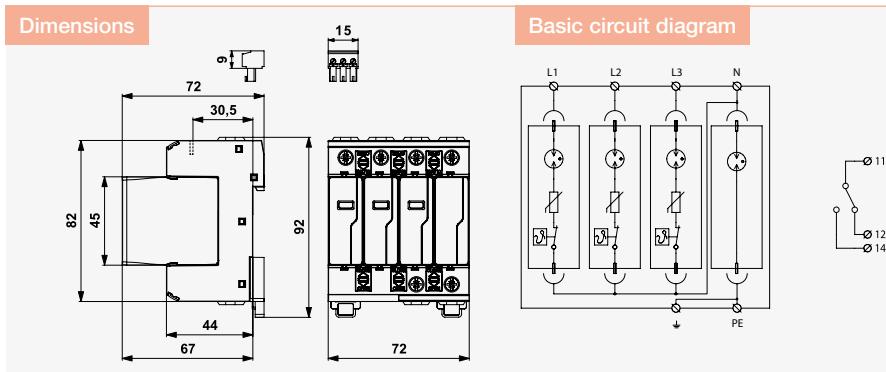


Parameter/Type	SLP-275 VB/3+1	SLP-275 VB/3S+1
Maximum operating voltage L-N	U_c 275 V AC	275 V AC
Maximum operating voltage N-PE	U_c 255 V AC	255 V AC
Nominal discharge current (8/20 μ s) L-N	I_n 20 kA	20 kA
Nominal discharge current (8/20 μ s) N-PE	I_n 20 kA	20 kA
Maximum discharge current (8/20 μ s) L-N	I_{max} 25 kA	25 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max} 40 kA	40 kA
Voltage protection level mode L-N	U_p 1,2 kV	1,2 kV
Voltage protection level mode N-PE	U_p 1,5 kV	1,5 kV
Voltage protection level mode L-PE	U_p 2 kV	2 kV
Ability to independently switch off the following current N-PE	I_f 0,1 kA	0,1 kA
Short-circuit current rating	I_{SCCR} 35 kA	35 kA
Maximum overcurrent protection	125 A gL/gG	125 A gL/gG
Response time	t_a 100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A03310	A03311

Spare module	SLP-275 VB/0	SLP-NPE V/0	SLP-275 VB/0	SLP-NPE V/0
Ordering number	A03314	A03722	A03314	A03722

SLP-... V/0

Replacement modules of SPD type 2

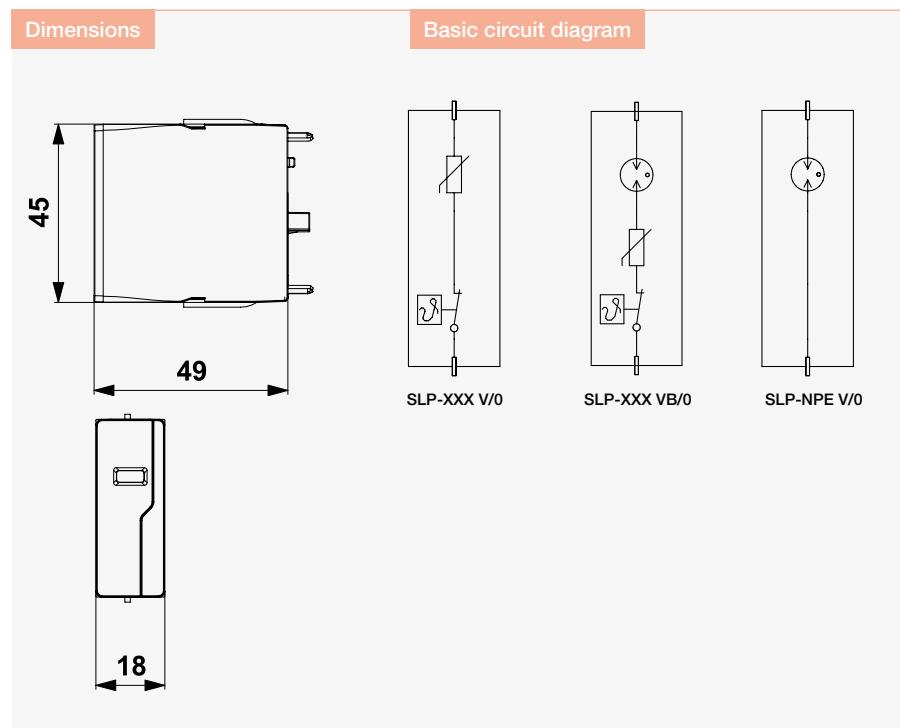

Type	Ordering number
SLP-075 V/0	A01811
SLP-150 V/0	A05193
SLP-275 V/0	A02368
SLP-385 V/0	A01950
SLP-440 V/0	A01813
SLP-600 V/0	A03303
SLP-NPE V/0	A03722
SLP-075 VB/0	A03312
SLP-130 VB/0	A03313
SLP-275 VB/0	A03314

SPDs connected to LV power supply systems up to 1 000 V

Surge Protections SPDs Type 3




- Surge Protections, SPDs Type 3
- Installation close to protected equipment

- For DIN rail 35 mm
- With integrated RFi filter
- Modules for additional installation
- For 19" RACK enclosures

DA-275 V/1(S)+1

SPD type 3 – surge protection, basic on DIN rail
pluggable module, visual fault signalling, module locking

- combination of varistor SPD and encapsulated spark gap, connected in the 1+1 mode
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

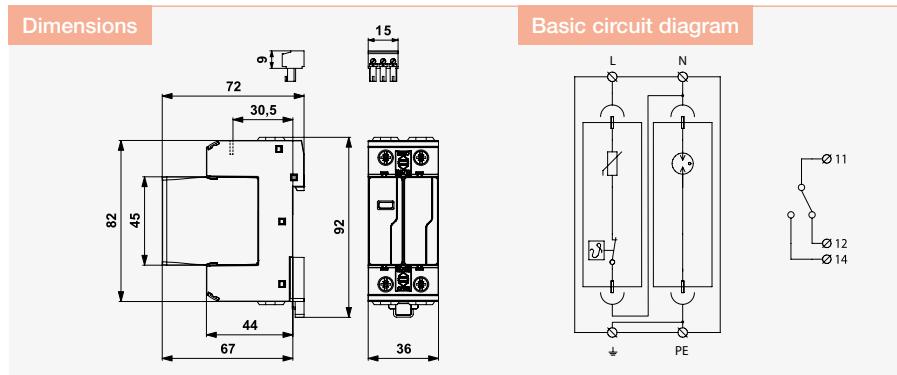


Parameter/Type	DA-275 V/1+1	DA-275 V/1S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal discharge current (8/20 μ s) L-N	I_n	5 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	10 kA
Test voltage L-N	U_{oc}	10 kV
Test voltage N-PE	U_{oc}	20 kV
Voltage protection level L-N	U_p	1 kV
Voltage protection level mode L-PE	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Maximum overcurrent protection	63 A gL/gG or C 63 A	63 A gL/gG or C 63 A
Response time	t_a	25 ns
Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A01872	A01975

Spare module	DA-275 V/0	DA-NPE V/0	DA-275 V/0	DA-NPE V/0
Ordering number	A03594	A03004	A03594	A03004

DA-275 V/3(S)+1

SPD type 3 – surge protection, basic on DIN rail
pluggable module, visual fault signalling, module locking

- combination of varistor SPD and encapsulated spark gap, connected in the 3+1 mode
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

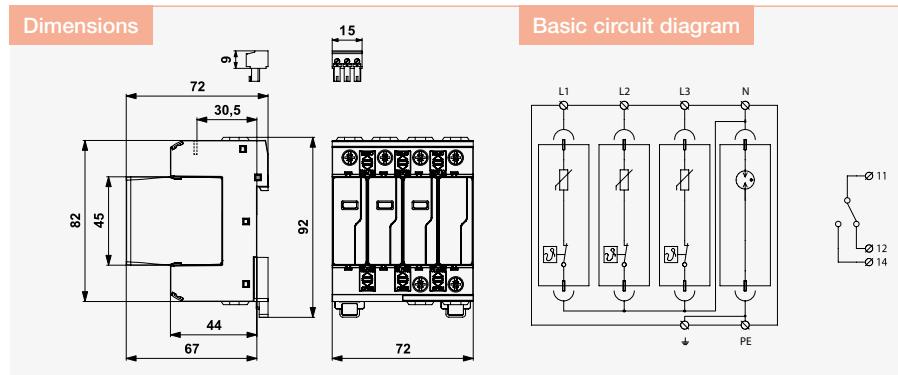


Parameter/Type	DA-275 V/3+1	DA-275 V/3S+1
Nominal voltage	U _n	230 V AC
Maximum operating voltage L-N	U _c	275 V AC
Maximum operating voltage N-PE	U _c	255 V AC
Nominal discharge current (8/20 µs) L-N	I _n	5 kA
Nominal discharge current (8/20 µs) N-PE	I _n	10 kA
Test voltage L-N	U _{oc}	10 kV
Test voltage N-PE	U _{oc}	20 kV
Voltage protection level mode L-N	U _p	1 kV
Voltage protection level mode N-PE	U _p	1,5 kV
Voltage protection level mode L-PE	U _p	1,5 kV
Ability to independently switch off the following current N-PE	I _f	0,1 kA
Maximum overcurrent protection	63 A gL/gG or C 63 A	63 A gL/gG or C 63 A
Response time	t _a	25 ns
Response time L-N	t _a	25 ns
Response time N-PE	t _a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A01848	A01849

Spare module	DA-275 V/0	DA-NPE V/0	DA-275 V/0	DA-NPE V/0
Ordering number	A03594	A03004	A03594	A03004

DA-... V/0

Replacement modules of SPD type 3

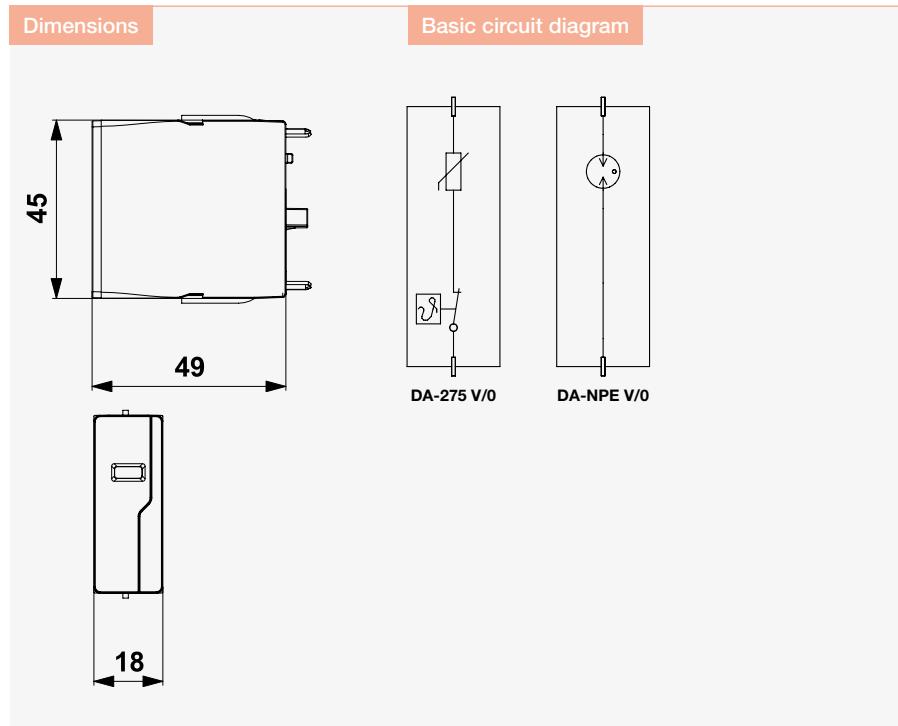


Type	Ordering number
DA-275 V/0	A03594
DA-NPE V/0	A03004

DA-...-DJ25

SPD type 3 – surge protection, basic on DIN rail
visual fault signalling

- universally applicable SPD for all types of LV electric and electronic equipments against surge voltage
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

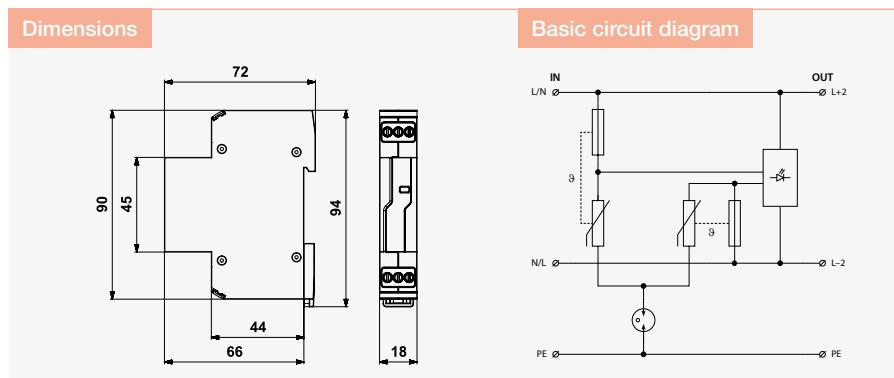


Parameter/Type	DA-075-DJ25	DA-150-DJ25
Nominal voltage U_n	60 V AC	120 V AC
Maximum operating voltage U_c	75 V AC	150 V AC
Nominal load current I_L	25 A	25 A
Nominal discharge current (8/20 µs) L-N I_n	2 kA	2,5 kA
Nominal discharge current (8/20 µs) N-PE I_n	2 kA	2,5 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	4 kA	5 kA
Test voltage L-N U_{oc}	4 kV	5 kV
Test voltage N-PE U_{oc}	4 kV	5 kV
Test voltage L+N-PE U_{oc}	8 kV	10 kV
Voltage protection level mode L-N U_p	0,43 kV	0,63 kV
Voltage protection level mode N-PE U_p	0,75 kV	1,1 kV
Voltage protection level mode L-PE U_p	0,75 kV	1,1 kV
Short-circuit current rating I_{SCCR}	1,5 kA	1,5 kA
Maximum overcurrent protection	25 A gL/gG or B 25 A	25 A gL/gG or B 25 A
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Fault indication	red indicator	red indicator
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06094	A06095

DA-275-DJ25-(S)

SPD type 3 – surge protection, basic on DIN rail
visual fault signalling

- universally applicable serially connected SPD for all types of LV electric and electronic equipments against surge voltage
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

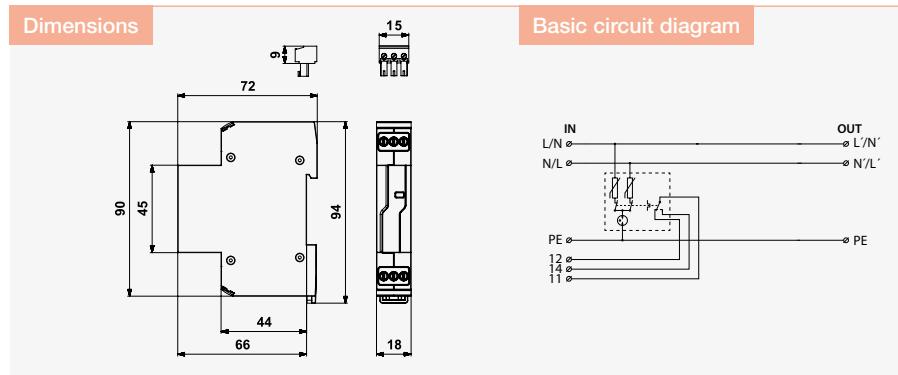


Parameter/Type	DA-275-DJ25	DA-275-DJ25-S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC
Nominal load current I_L	25 A	25 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA
Maximum overcurrent protection	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Fault indication	red indicator	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A05770	A05771

DA-275-DF..

SPD type 3 – surge protection with RFi filter
visual fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance

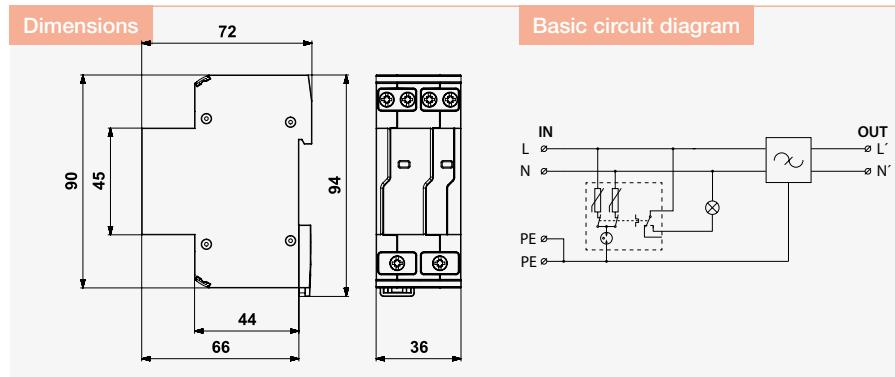


Parameter/Type	DA-275-DF2	DA-275-DF6	DA-275-DF10	DA-275-DF16
Nominal voltage U_n	230 V AC	230 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC	275 V AC	275 V AC
Nominal load current I_L	2 A	6 A	10 A	16 A
Nominal discharge current (8/20 µs) L-N I_n	3 kA	3 kA	3 kA	3 kA
Nominal discharge current (8/20 µs) N-PE I_n	3 kA	3 kA	3 kA	3 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	5 kA	5 kA	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA	6 kA	6 kA
Maximum overcurrent protection	2 A gL/gG or C 2 A	6 A gL/gG or C 6 A	10 A gL/gG or C 10 A	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns	25 ns	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns	100 ns	100 ns
Filter attenuation at 1MHz ($50 \Omega/50 \Omega$) unsymmetrical	30 dB	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²			
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²			
Fault indication	red indicator	red indicator	red indicator	red indicator
Cross-section of remote indication conductors solid (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Cross-section of remote indication conductors stranded (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C			
Mounting	DIN rail 35 mm			
According to standard		EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A05715	A05717	A05719	A05721

DA-275-DF..-S

SPD type 3 – surge protection with RFi filter
visual and remote fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance

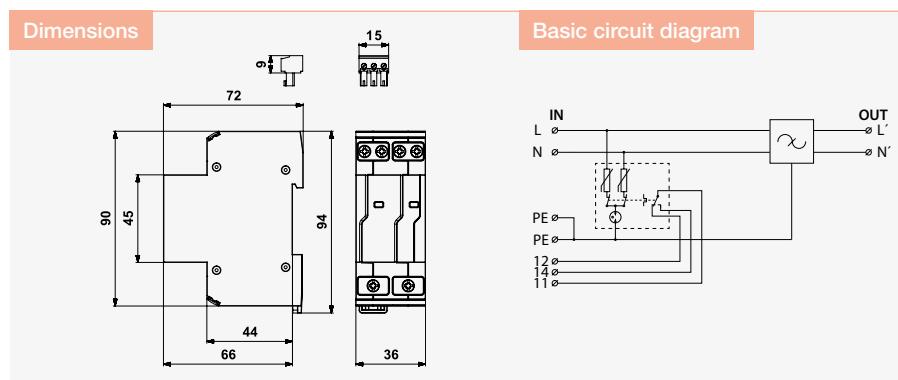


Parameter/Type	DA-275-DF2-S	DA-275-DF6-S	DA-275-DF10-S	DA-275-DF16-S
Nominal voltage	U_n 230 V AC	U_n 230 V AC	U_n 230 V AC	U_n 230 V AC
Maximum operating voltage	U_c 275 V AC	U_c 275 V AC	U_c 275 V AC	U_c 275 V AC
Nominal load current	I_L 2 A	I_L 6 A	I_L 10 A	I_L 16 A
Nominal discharge current (8/20 μ s) L-N	I_n 3 kA	I_n 3 kA	I_n 3 kA	I_n 3 kA
Nominal discharge current (8/20 μ s) N-PE	I_n 3 kA	I_n 3 kA	I_n 3 kA	I_n 3 kA
Nominal discharge current (8/20 μ s) L+N-PE	I_n 5 kA	I_n 5 kA	I_n 5 kA	I_n 5 kA
Test voltage L-N	U_{∞} 6 kV	U_{∞} 6 kV	U_{∞} 6 kV	U_{∞} 6 kV
Test voltage N-PE	U_{∞} 6 kV	U_{∞} 6 kV	U_{∞} 6 kV	U_{∞} 6 kV
Test voltage L+N-PE	U_{∞} 10 kV	U_{∞} 10 kV	U_{∞} 10 kV	U_{∞} 10 kV
Voltage protection level mode L-N	U_p 1,2 kV	U_p 1,2 kV	U_p 1,2 kV	U_p 1,2 kV
Voltage protection level mode N-PE	U_p 1,5 kV	U_p 1,5 kV	U_p 1,5 kV	U_p 1,5 kV
Voltage protection level mode L-PE	U_p 1,5 kV	U_p 1,5 kV	U_p 1,5 kV	U_p 1,5 kV
Short-circuit current rating	I_{SCCR} 6 kA	I_{SCCR} 6 kA	I_{SCCR} 6 kA	I_{SCCR} 6 kA
Maximum overcurrent protection	2 A gL/gG or C 2 A	6 A gL/gG or C 6 A	10 A gL/gG or C 10 A	16 A gL/gG or C 16 A
Response time L-N	t_a 25 ns	t_a 25 ns	t_a 25 ns	t_a 25 ns
Response time N-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns
Filter attenuation at 1MHz (50 Ω /50 Ω) unsymmetrical	30 dB	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²			
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²			
Fault indication	red indication field	red indication field	red indication field	red indication field
Remote indication	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors solid (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Cross-section of remote indication conductors stranded (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C			
Mounting	DIN rail 35 mm			
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3			
Ordering number	A05716	A05718	A05720	A05722

DA-275 DF 25

SPD type 3 – surge protection with RFi filter
visual fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance

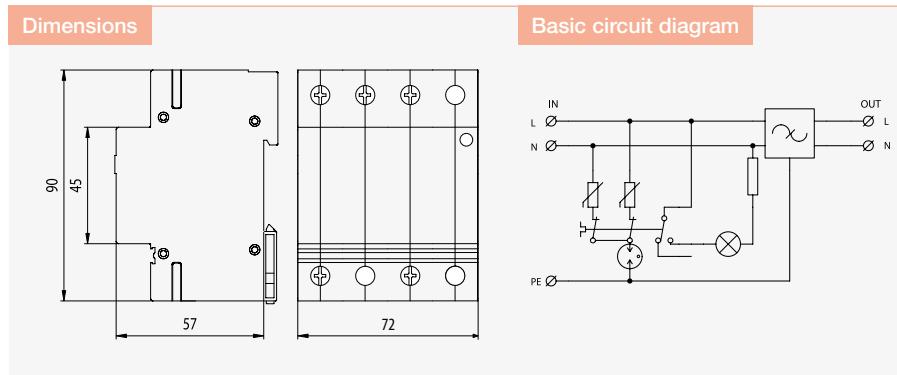


Parameter/Type	DA-275 DF 25
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal load current I_L	25 A
Nominal discharge current (8/20 µs) L-N I_n	3 kA
Nominal discharge current (8/20 µs) N-PE I_n	3 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	5 kA
Test voltage L-N U_{oc}	6 kV
Test voltage N-PE U_{oc}	6 kV
Test voltage L+N-PE U_{oc}	10 kV
Voltage protection level mode L-N U_p	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Maximum overcurrent protection	25 A gL/gG or C 25 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Filter attenuation at 1MHz ($50 \Omega / 50 \Omega$) unsymmetrical	30 dB
Cross-section of connected conductors solid (min/max)	1 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 35 mm ²
Fault indication	red indicator
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A03732

DA-275 DFI 1

SPD type 3 – surge protection with RFi filter
fault signalling due to power supply interruption

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance
- priority of protection

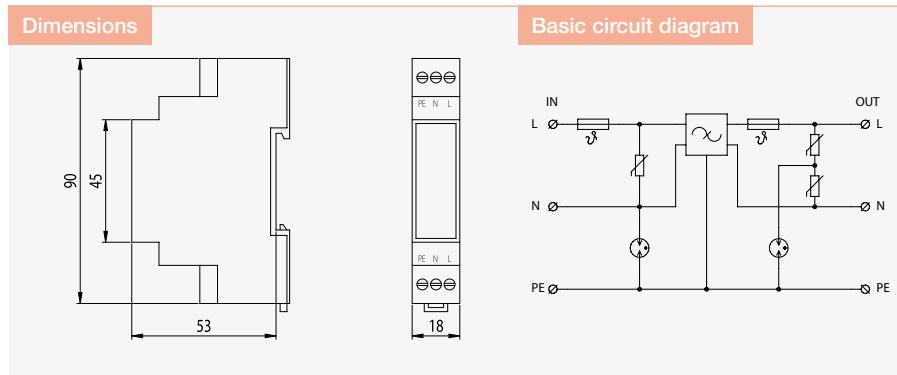


Parameter/Type	DA-275 DFI 1
Nominal voltage	230 V AC
Maximum operating voltage	275 V AC
Nominal load current	1 A
Nominal discharge current (8/20 µs) L-N	1,5 kA
Nominal discharge current (8/20 µs) N-PE	1,5 kA
Test voltage L-N	3 kV
Test voltage N-PE	3 kV
Voltage protection level mode L-N	1,2 kV
Voltage protection level mode N-PE	1,2 kV
Maximum overcurrent protection	1 A gL/gG or C 1 A
Response time L-N	25 ns
Response time N-PE	100 ns
Filter attenuation at 1MHz (50 Ω/50 Ω) unsymmetrical	50 dB
Cross-section of connected conductors solid (min/max)	0,14 mm² / 4 mm²
Cross-section of connected conductors stranded (min/max)	0,14 mm² / 2,5 mm²
Fault indication	supply interruption
Remote indication	no
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A01205

DA-275-DFi..

SPD type 3 – surge protection with RFi filter

fault signalling due to power supply interruption, visual fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance
- priority of protection

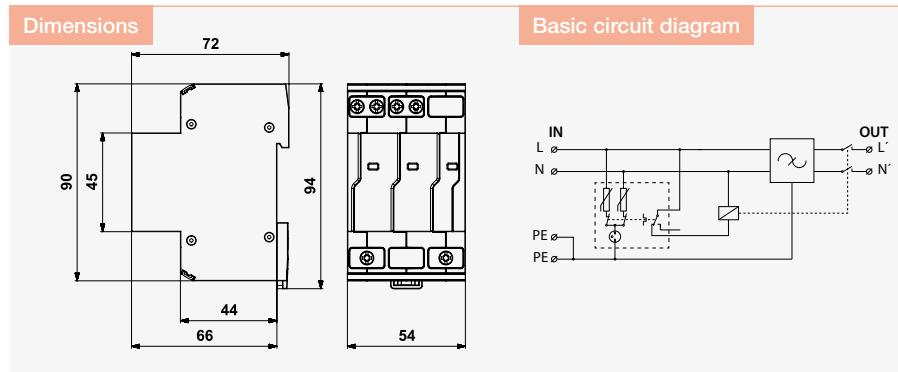


Parameter/Type	DA-275-DFi6	DA-275-DFi10	DA-275-DFi16
Nominal voltage U_n	230 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC	275 V AC
Nominal load current I_L	6 A	10 A	16 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA	6 kA
Maximum overcurrent protection	6 A gL/gG or C 6 A	10 A gL/gG or C 10 A	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns	100 ns
Filter attenuation at 1MHz ($50 \Omega/50 \Omega$) unsymmetrical	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Fault indication	red indication field, supply interruption	red indication field, supply interruption	red indication field, supply interruption
Cross-section of remote indication conductors solid (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²
Cross-section of remote indication conductors stranded (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	-	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A05723	A05724	A05725

DA-275-BFi2

SPD type 3 – surge protection with RFi filter
fault signalling due to power supply interruption

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, etc. against impact of surge voltage and RF disturbance
- priority of protection

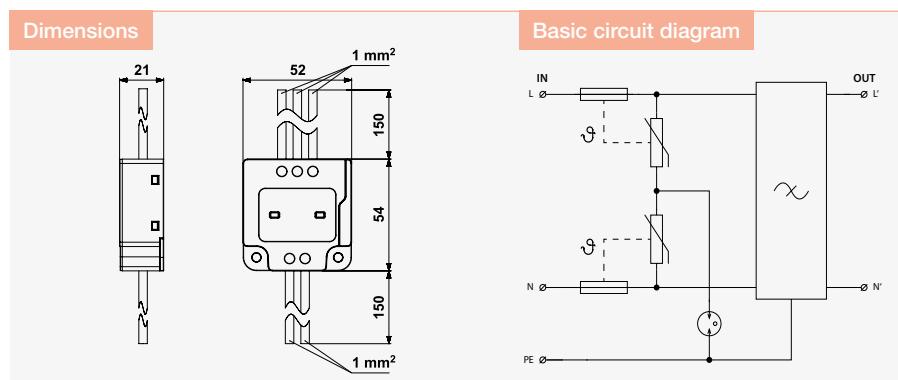


Parameter/Type	DA-275-BFi2
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal load current I_L	2 A
Nominal discharge current (8/20 µs) L-N I_n	3 kA
Nominal discharge current (8/20 µs) N-PE I_n	3 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	5 kA
Test voltage L-N U_{oc}	6 kV
Test voltage N-PE U_{oc}	6 kV
Test voltage L+N-PE U_{oc}	10 kV
Voltage protection level mode L-N U_p	1,65 kV
Voltage protection level mode L(N)-PE U_p	1,5 kV
Short-circuit current rating I_{SCCR}	3 kA
Maximum overcurrent protection	B 16 A
Response time L-N t_a	25 ns
Response time L(N)-PE t_a	100 ns
Filter attenuation at 1MHz ($50 \Omega/50 \Omega$) unsymmetrical	20 dB
Fault indication	loss of voltage
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06262

DA-275 BFG

SPD type 3 – surge protection with RFi filter

visual fault signalling, grounding terminal, class I device

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance

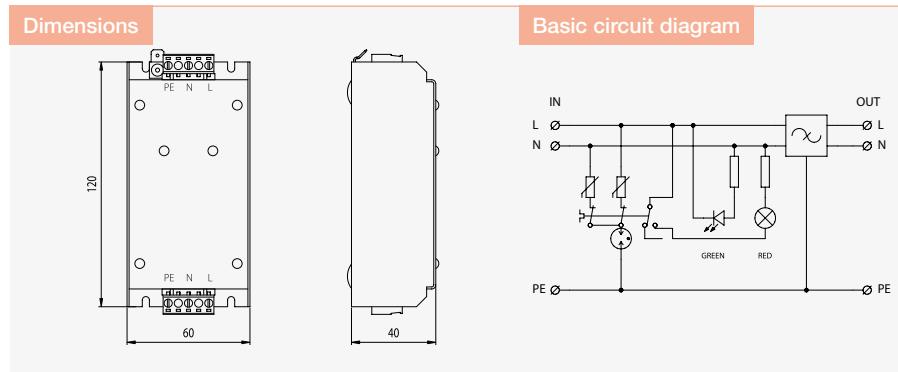


Parameter/Type	DA-275 BFG
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal load current I_L	16 A
Nominal discharge current (8/20 µs) L-N I_n	3 kA
Nominal discharge current (8/20 µs) N-PE I_n	3 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	5 kA
Test voltage L-N U_{oc}	6 kV
Test voltage N-PE U_{oc}	6 kV
Test voltage L+N-PE U_{oc}	10 kV
Voltage protection level mode L-N U_p	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Maximum overcurrent protection	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Filter attenuation at 1MHz ($50 \Omega / 50 \Omega$) unsymmetrical	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 2,5 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²
Fault indication	red indicator
Remote indication	no
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	surface on the desk
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A00629

CZ-275-A

SPD type 3 – module of surge protection for build in acoustic fault signalling

- SPD for additional installation to devices or equipments
- installation to LV installations, close to protected equipment
- for protection of all LV equipments against surge voltage
- non-symetrical connection

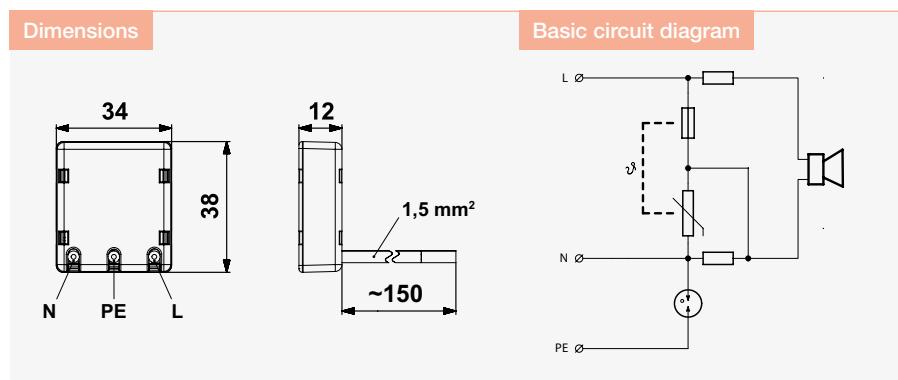


Parameter/Type	CZ-275-A
Nominal voltage	U _n
230 V AC	
Maximum operating voltage L-N	U _c
275 V AC	
Maximum operating voltage N-PE	U _c
255 V AC	
Nominal discharge current (8/20 µs) L-N	I _n
3 kA	
Nominal discharge current (8/20 µs) N-PE	I _n
6 kA	
Test voltage L-N	U _{oc}
6 kV	
Test voltage N-PE	U _{oc}
6 kV	
Voltage protection level mode L-N	U _p
1,35 kV	
Voltage protection level mode N-PE	U _p
1,5 kV	
Voltage protection level mode L-PE	U _p
1,5 kV	
Short-circuit current rating	I _{SCCR}
1,5 kA	
Maximum overcurrent protection	
B 16 A	
Response time L-N	t _a
25 ns	
Response time N-PE	t _a
100 ns	
Fault indication	acoustic signalling
Degree of protection	IP 20
Range of operating temperatures (min/max)	-20 °C / 70 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06737

DA-275 CZS

**SPD type 3 – module of surge protection for build in
remote fault signalling**

- SPD for additional installation to devices or equipments
- installation to LV installations, close to protected equipment
- for protection of all LV equipments against surge voltage
- non-symmetrical connection

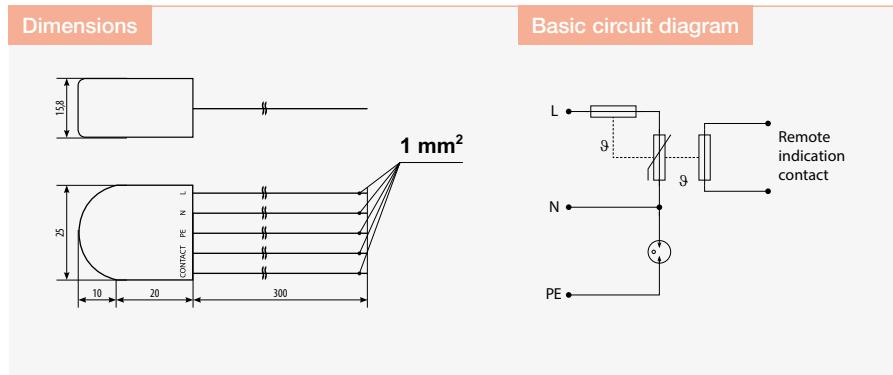


Parameter/Type	DA-275 CZS
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal discharge current (8/20 μ s) L-N I_n	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA
Test voltage L-N U_{oc}	6 kV
Test voltage N-PE U_{oc}	6 kV
Voltage protection level mode L-N U_p	1,35 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Short-circuit current rating I_{SCCR}	1,5 kA
Maximum overcurrent protection	B 16 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Fault indication	open contact
Remote indication	potential-free open contact
Remote indication contacts	230 V / 0,5 A AC, 24 V / 0,5 A DC
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A01916

DA-275-A

SPD type 3 – module of surge protection for build in acoustic fault signalling

- SPD for additional installation to devices or equipments
- installation to LV installations, close to protected equipment
- for protection of all LV equipments against surge voltage
- can be used for single-phase power supply networks with isolation transformer, connection of L and N wires can be changed

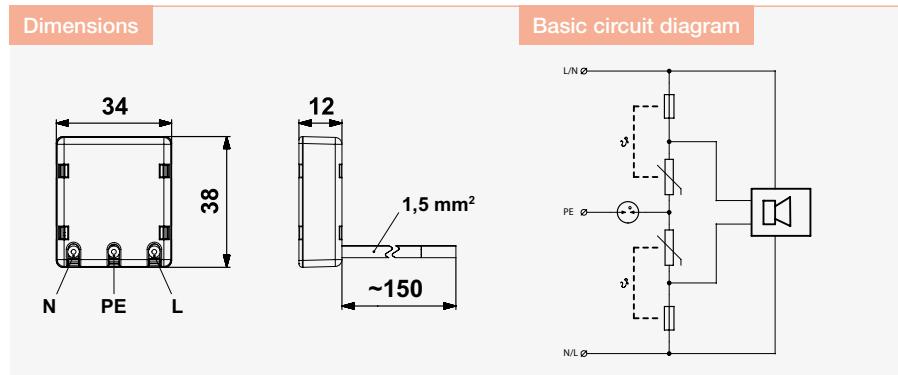


Parameter/Type	DA-275-A
Nominal voltage	U _n 230 V AC
Maximum operating voltage	U _c 275 V AC
Nominal discharge current (8/20 µs) L-N	I _n 2 kA
Nominal discharge current (8/20 µs) N-PE	I _n 2 kA
Nominal discharge current (8/20 µs) L+N-PE	I _n 4 kA
Test voltage L-N	U _{oc} 4 kV
Test voltage N-PE	U _{oc} 4 kV
Test voltage L-PE	U _{oc} 4 kV
Test voltage L+N-PE	U _{oc} 8 kV
Voltage protection level mode L-N	U _p 1.5 kV
Voltage protection level mode N-PE	U _p 1.5 kV
Voltage protection level mode L-PE	U _p 1.5 kV
Short-circuit current rating	I _{SCCR} 1.5 kA
Maximum overcurrent protection	B 16 A
Response time L-N	t _a 25 ns
Response time N-PE	t _a 100 ns
Fault indication	acoustic signalling
Degree of protection	IP 20
Range of operating temperatures (min/max)	-20 °C / 70 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06738

DA-275-S

**SPD type 3 – module of surge protection for build in
remote fault signalling**

- SPD for additional installation to devices or equipments
- installation to LV installations, close to protected equipment
- for protection of all LV equipments against surge voltage
- can be used for single-phase power supply networks with isolation transformer, connection of L and N wires can be changed


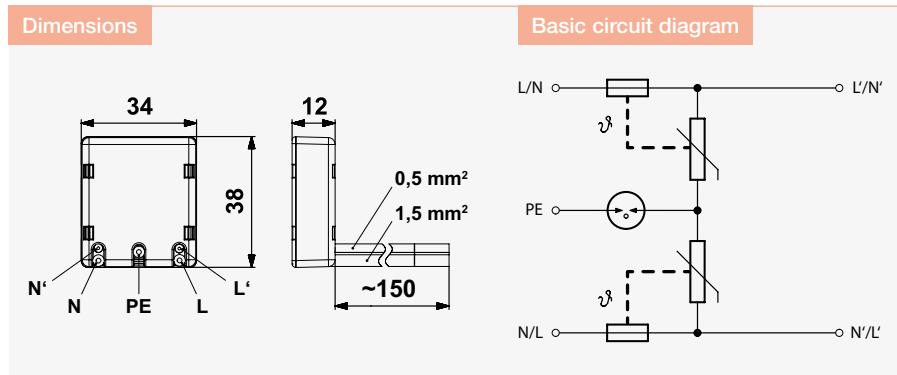


Parameter/Type	DA-275-S
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal discharge current (8/20 μ s) L-N I_n	2 kA
Nominal discharge current (8/20 μ s) N-PE I_n	2 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	4 kA
Test voltage L-N U_{oc}	4 kV
Test voltage N-PE U_{oc}	4 kV
Test voltage L-PE U_{oc}	4 kV
Test voltage L+N-PE U_{oc}	8 kV
Voltage protection level mode L-N U_p	1,5 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Short-circuit current rating I_{SCCR}	1,5 kA
Maximum overcurrent protection	B 16 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Fault indication	loss of voltage
Remote indication	potential open contact
Maximum current of signalling	1 A
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06739

RACK-PROTECTOR-...-1U

SPD type 3 – multiple socket outlet with surge protection for 19" RACK
visual fault signalling, 3 m power supply cord, CEE 7/7 type plug

- variants with/without on/off switch and with/without RFi filter
- with French type (earthing pin) and Euro type sockets
- for protection of information technological equipments against surge voltage and possibly RF interference
- mounting height 1U
- X8: 8 sockets
- VX7: on/off switch, 7 sockets
- F6: RFi filter, 6 sockets
- VF5: RFi filter, on/off switch, 5 sockets
- EURO-X12: 12 Euro sockets

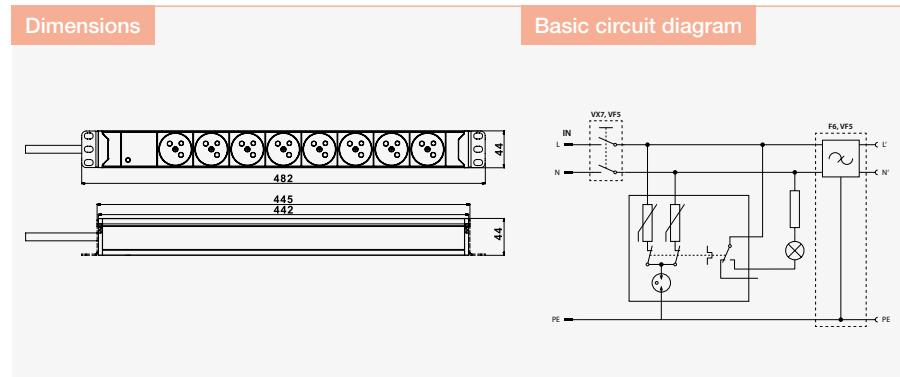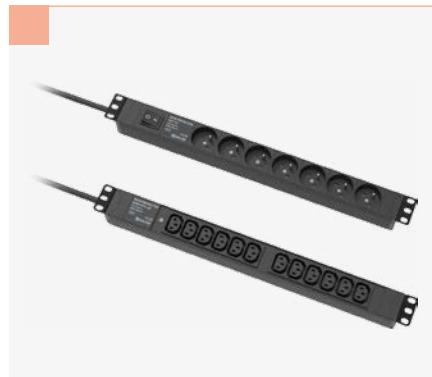


Parameter/Type	RACK-PROTECTOR-X8-1U	RACK-PROTECTOR-VX7-1U	RACK-PROTECTOR-F6-1U	RACK-PROTECTOR-VF5-1U	RACK-PROTECTOR-EURO-X12-1U
Nominal voltage	U_n	230 V AC	230 V AC	230 V AC	230 V AC
Maximum operating voltage	U_c	275 V AC	275 V AC	275 V AC	275 V AC
Nominal load current	I_L	16 A	16 A	16 A	16 A
Nominal discharge current (8/20 µs) L-N	I_n	3 kA	3 kA	3 kA	3 kA
Nominal discharge current (8/20 µs) N-PE	I_n	3 kA	3 kA	3 kA	3 kA
Nominal discharge current (8/20 µs) L+N-PE	I_n	5 kA	5 kA	5 kA	5 kA
Test voltage L-N	U_{oc}	6 kV	6 kV	6 kV	6 kV
Test voltage N-PE	U_{oc}	6 kV	6 kV	6 kV	6 kV
Test voltage L+N-PE	U_{oc}	10 kV	10 kV	10 kV	10 kV
Voltage protection level mode L-N	U_p	1,2 kV	1,2 kV	1,2 kV	1,2 kV
Voltage protection level mode N-PE	U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE	U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating	I_{SCCR}	6 kA	6 kA	6 kA	6 kA
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L-N	t_a	25 ns	25 ns	25 ns	25 ns
Response time N-PE	t_a	100 ns	100 ns	100 ns	100 ns
RFi filter		-	-	yes	yes
Filter attenuation at 1MHz (50 Ω//50 Ω) unsymmetrical		-	-	30 dB	30 dB
Fault indication		red indicator	red indicator	red indicator	red indicator
Degree of protection		IP 40	IP 40	IP 40	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	19" rack	19" rack	19" rack	19" rack	19" rack
According to standard			EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A05872	A05873	A05874	A05875	A05961

RACK-PROTECTOR-...-1U-5

NEW

SPD type 3 – multiple socket outlet with surge protection for 19" RACK
visual fault signalling, 5 m power supply cord, CEE 7/7 type plug

- variants with/without RFi filter
- with French type (earthing pin) and Euro type sockets
- for protection of information technological equipments against surge voltage and possibly RF interference
- mounting height 1U
- X8: 8 sockets
- F6: RFi filter, 6 sockets
- EURO-X12: 12 Euro sockets

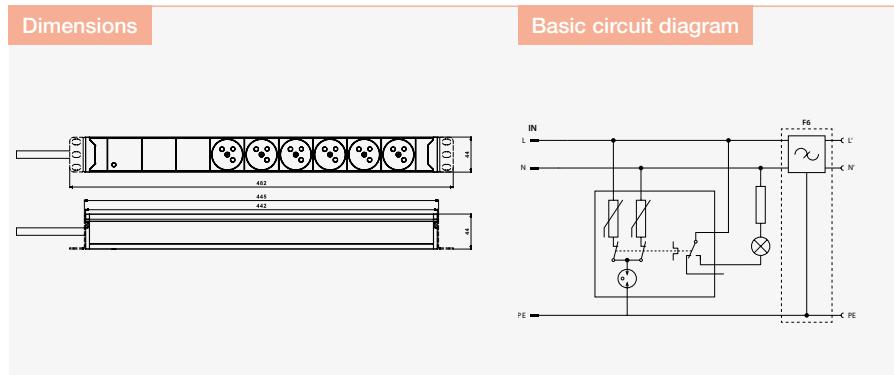


Parameter/Type	RACK-PROTECTOR-X8-1U-5	RACK-PROTECTOR-F6-1U-5	RACK-PROTECTOR-EURO-X12-1U-5
Nominal voltage U_n	230 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC	275 V AC
Nominal load current I_L	16 A	16 A	16 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA	6 kA
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns	100 ns
RFi filter	-	yes	-
Filter attenuation at 1MHz (50 Ω //50 Ω) unsymmetrical	-	30 dB	-
Fault indication	red indicator	red indicator	red indicator
Degree of protection	IP 40	IP 40	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	19" rack	19" rack	19" rack
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A07009	A06751	A07008

RACK-PROTECTOR-...-1U-PI

NEW

SPD type 3 – multiple socket outlet with surge protection for 19" RACK
visual fault signalling, 3 m power supply cord, industrial plug 16 A 2P+PE

- with French type (earthing pin) and Euro type sockets
- mounting height 1U
- X8: 8 sockets
- EUROS-X12: 12 Euro sockets
- for protection of information technological equipments against surge voltage

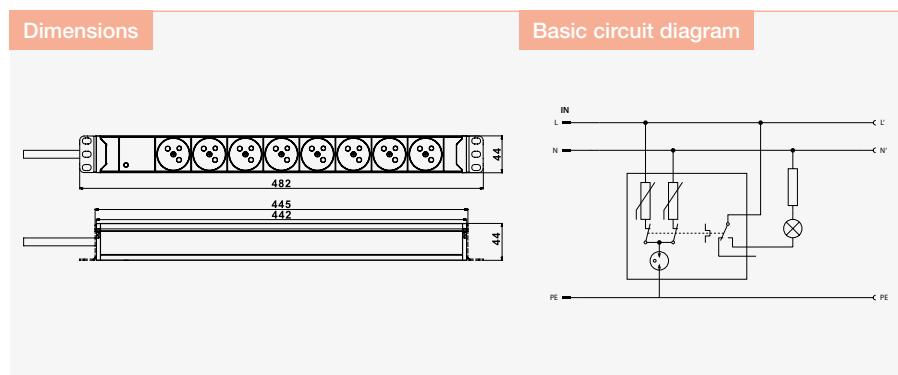

Parameter / Type	RACK-PROTECTOR-X8-1U-PI	RACK-PROTECTOR-EURO-X12-1U-PI
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC
Nominal load current I_L	16 A	16 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Fault indication	red indicator	red indicator
Degree of protection	IP 40	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	19" rack	19" rack
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	
Ordering number	A06255	A06256

RTO-...

Separating inductor (bridge) for coordination


- coupling impedance
- for coordination of SPDs Type 1 and 2 or Type 2 and 3



Dimensions	Basic circuit diagram		
	RTO-16	RTO-35	RTO-63

Parameter/Type	RTO-16	RTO-35	RTO-63
Nominal voltage U_n	500 V AC	500 V AC	500 V AC
Frequency f	50 Hz	50 Hz	50 Hz
Nominal load current I_L	16 A	35 A	63 A
Maximum overcurrent protection	16 A gL/gG or C 16 A	35 A gL/gG or C 35 A	63 A gL/gG or C 63 A
Resistance R	5 mΩ	2,5 mΩ	2 mΩ
Inductance L	10 µH	10 µH	10 µH
Power loss at I_L	1,28 W	3 W	8 W
Cross-section of connected conductors solid (min/max)	1 mm ² / 50 mm ²	1 mm ² / 50 mm ²	1 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
Ordering number	A01432	A01433	A01434

Notes

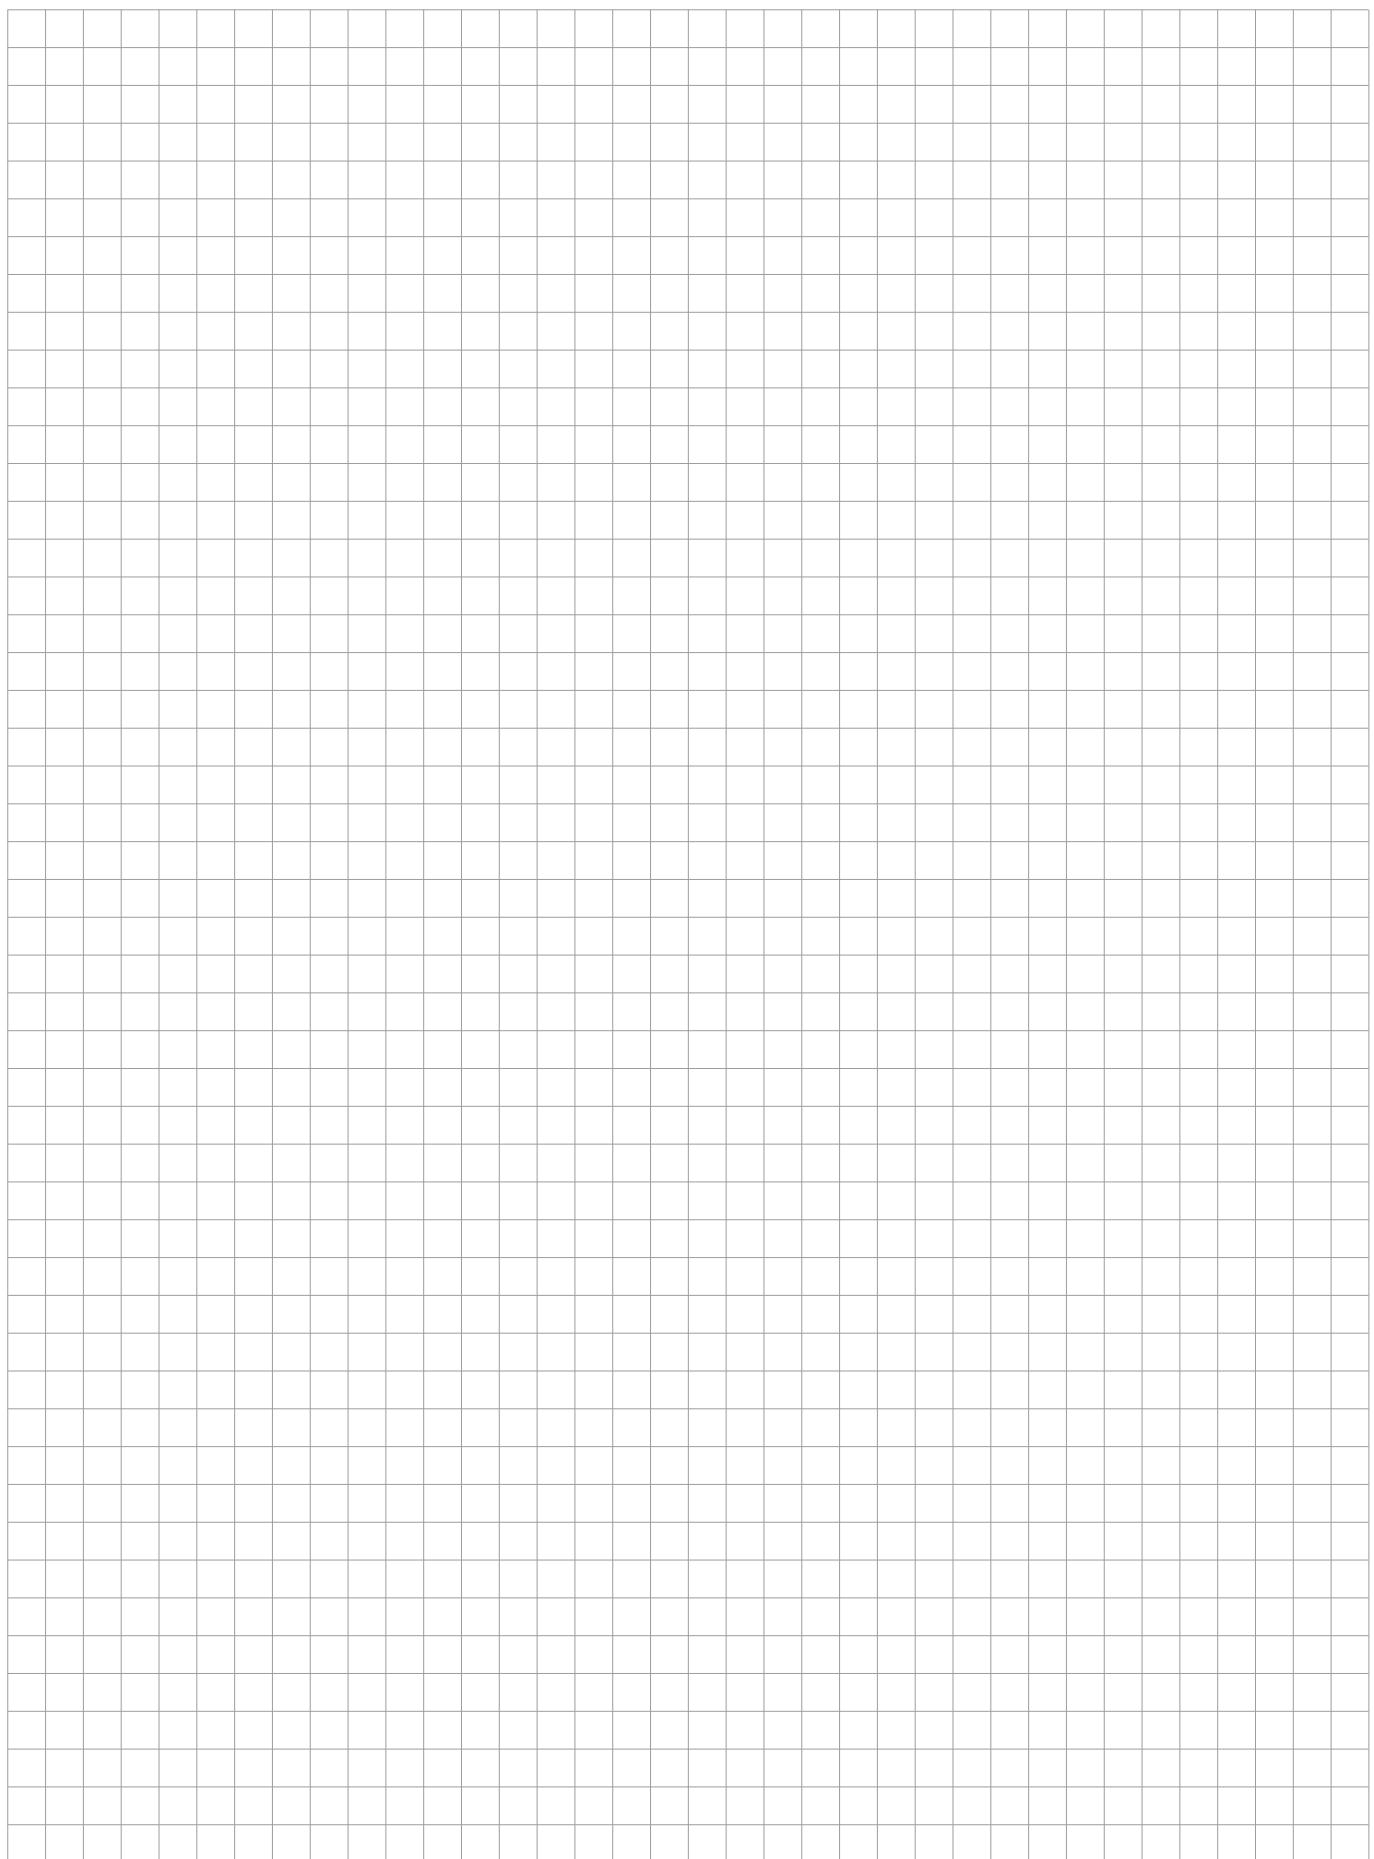A large grid of squares, approximately 20 columns by 20 rows, intended for handwritten notes.

Surge Protective Devices for LED lights



- Lighting systems with LED technology
- Street lighting
- Traffic lights
- Lighting of industry facilities

- DA-320-LED
- SP-T2+T3-320-Y-...-LED

Protection of (street) lighting

Current requirements for the quality of lighting and energy efficiency bring frequent use of LED technology. Such technologies offer a long service life under standard operating conditions which corresponds to higher investment costs. Electronic control devices of LED lighting are considerably more sensitive to high voltage impulses than, for example, gas discharge tube lighting. Overvoltage in these installations is usually higher than the required withstand impulse voltage of electronic lighting equipment. Overvoltage protection is also necessary due to large-scale installations of street lighting and lighting in large industrial factories, which increase the risk particularly of induced overvoltage caused by lightning strikes, failures and switching in distribution and transmission networks.

SPDs are recommended to be installed as close as possible to the light source. The **DA-320-LED** and **SP-T2+T3-320/Y-CLT-LED** types meet these requirements. Considering the risk and installation method it is also advisable to install FLP-12,5 V or SLP-275 arresters in supply distribution boards or at the bottom of the light pole. DA-320-LED and SP-T2+T3-320/Y-CLT-LED meet the requirements of the IEEE (ANSI) C62.41.2 standard concerning C location - outside a structure (building). These requirements are stipulated in this standard for situations where overvoltage protection is also provided at the entrance of the wiring, i.e., at the connecting point to the distribution system. If a light source class II equipment, SPDs are connected at the interface of the wiring and the electrical equipment. Also in this case, an SPD will be connected to protective earth (PE). These SPDs can also be used to protect other electrical equipment whose wiring is similar to lighting wiring.

The DA-320-LED and SP-T2+T3-320/Y-CLT-LED types are designed as transit modules with the priority placed on protection. If the SPD is damaged, the light source will be disconnected from the supply and not illuminate. This simple method makes it possible to locate the fault. These SPDs can also be connected in parallel to the protected circuit and the SPD output used to signal the SPD status.

Fig. 01 Wiring of SPD to Class I equipment

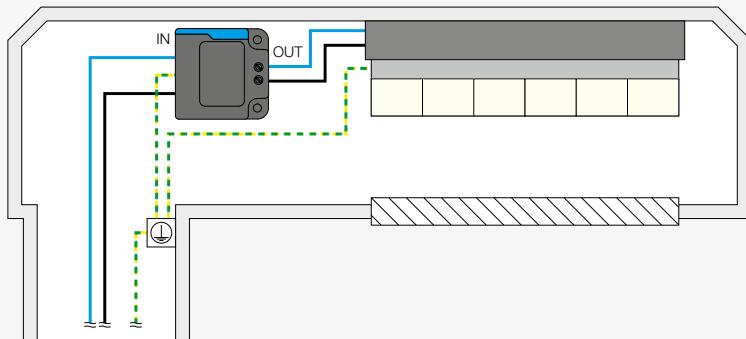


Fig. 02 Wiring of SPD to Class II equipment




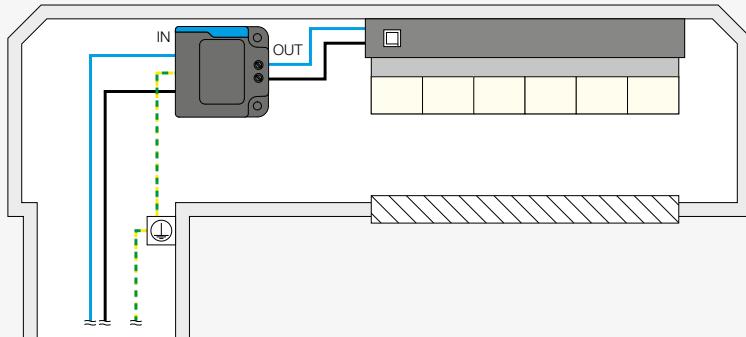


Fig. 03 Wiring of SPD: a) transit (priority of protection), b) parallel (priority of supply)

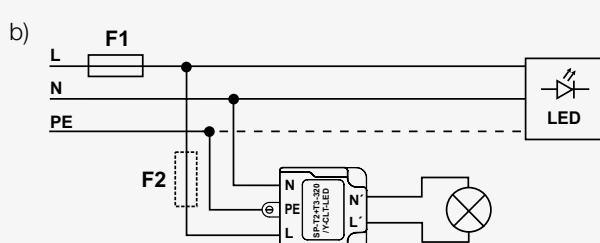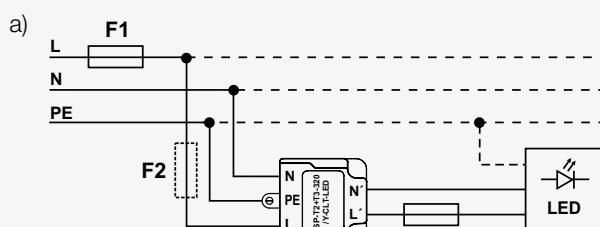


Overview SP-T2+T3-320/Y...-LED


SP-T2+T3-320/Y-CLT-LED
A06044




SP-T2+T3-320/Y-CLC-LED
A06246

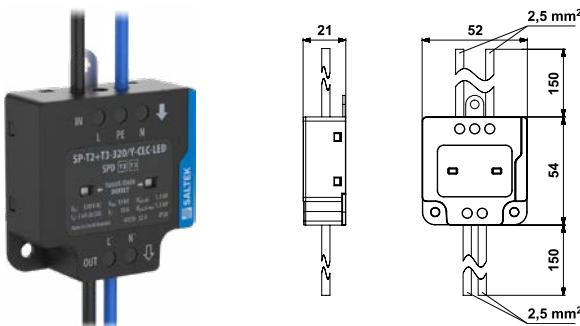


SP-T2+T3-320/Y-TLC-LED
A06247

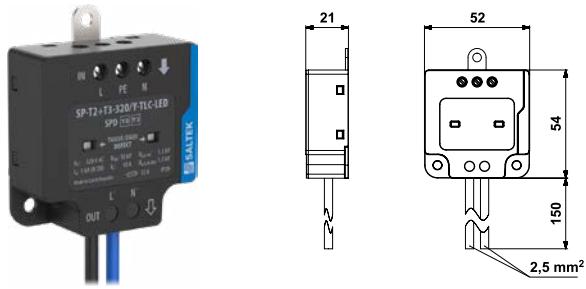


SP-T2+T3-320/Y-TLT-LED
A06244

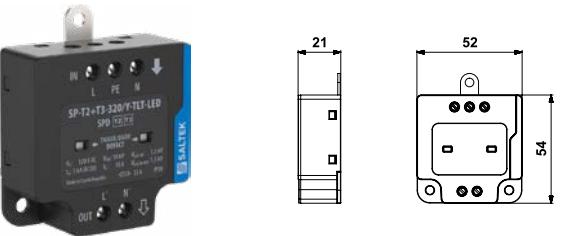


SP-T2+T3-320/Y-CCC-LED
A06245

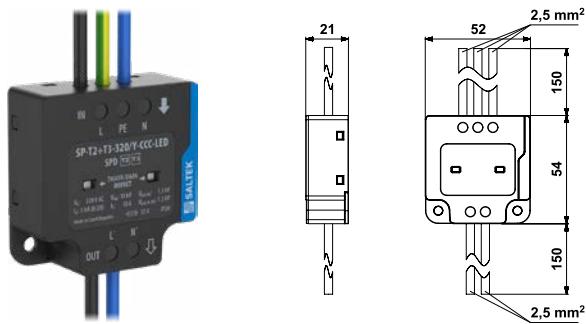


SP-T2+T3-320/Y-CCT-LED
A06243

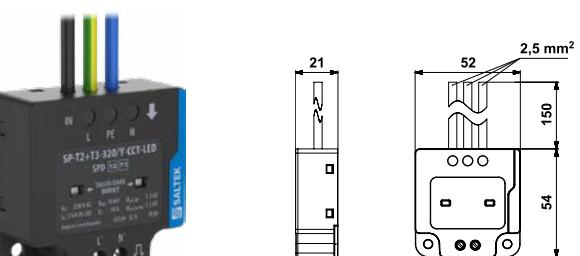

SP-T2+T3-320/Y-TTC-LED
A06248

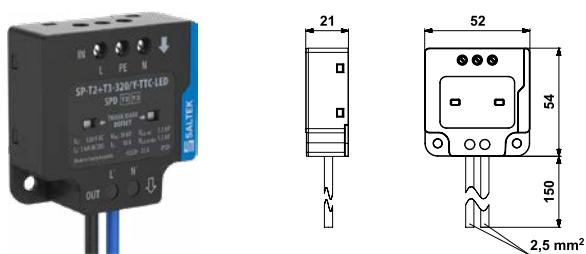

SP-T2+T3-320/Y-TTT-LED
A06222

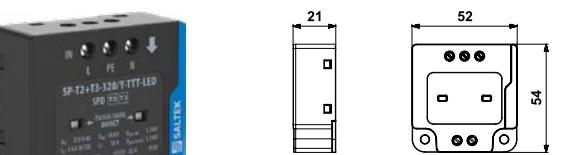

SP-T2+T3-320/Y.-L.-LED


NEW

SPD type 2 and type 3 – surge protective device for LED lights
fault signalling by supply interruption

- surge arrester especially for LED lights
- installation close to protected equipment in LV power circuits
- also for equipment in external part of building with high exposure level (according to IEEE C62.41.2)

**Dimensions**

See page 87.

Basic circuit diagram

Parameter/Type	SP-T2+T3-320/Y-CLT-LED	SP-T2+T3-320/Y-CLC-LED	SP-T2+T3-320/Y-TLC-LED	SP-T2+T3-320/Y-TLT-LED
Nominal voltage U_n	230 V AC	230 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	320 V AC	320 V AC	320 V AC	320 V AC
Nominal load current I_L	10 A	10 A	10 A	10 A
Nominal discharge current (8/20 μ s) L-N I_n	5 kA	5 kA	5 kA	5 kA
Nominal discharge current (8/20 μ s) N-PE I_n	5 kA	5 kA	5 kA	5 kA
Maximum discharge current (8/20 μ s) L-N I_{max}	10 kA	10 kA	10 kA	10 kA
Maximum discharge current (8/20 μ s) N-PE I_{max}	10 kA	10 kA	10 kA	10 kA
Test voltage L-N U_{oc}	10 kV	10 kV	10 kV	10 kV
Test voltage N-PE U_{oc}	10 kV	10 kV	10 kV	10 kV
Test voltage L-PE U_{oc}	10 kV	10 kV	10 kV	10 kV
Voltage protection level mode L-N U_p	1,3 kV	1,3 kV	1,3 kV	1,3 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	3 kA	3 kA	3 kA	3 kA
Maximum overcurrent protection	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A
Response time L-N t_a	25 ns	25 ns	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 2,5 mm ²	-	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 1,5 mm ²	-	0,14 mm ² / 1,5 mm ²	0,14 mm ² / 1,5 mm ²
Fault indication	loss of voltage, dark grey indication field			
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2,T3			
Ordering number	A06044	A06246	A06247	A06244

SP-T2+T3-320/Y...-LED

NEW

SPD type 2 and type 3 – surge protective device for LED lights
fault signalling by supply interruption


- surge arrester especially for LED lights
- installation close to protected equipment in LV power circuits
- also for equipment in external part of building with high exposure level (according to IEEE C62.41.2)



Dimensions

See page 87.

Basic circuit diagram



Parameter/Type	SP-T2+T3-320/Y-CCC-LED	SP-T2+T3-320/Y-CCT-LED	SP-T2+T3-320/Y-TTC-LED	SP-T2+T3-320/Y-TTT-LED
Nominal voltage	U_n	230 V AC	230 V AC	230 V AC
Maximum operating voltage	U_c	320 V AC	320 V AC	320 V AC
Nominal load current	I_L	10 A	10 A	10 A
Nominal discharge current (8/20 μ s) L-N	I_n	5 kA	5 kA	5 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	5 kA	5 kA	5 kA
Maximum discharge current (8/20 μ s) L-N	I_{max}	10 kA	10 kA	10 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max}	10 kA	10 kA	10 kA
Test voltage L-N	U_{oc}	10 kV	10 kV	10 kV
Test voltage N-PE	U_{oc}	10 kV	10 kV	10 kV
Test voltage L-PE	U_{oc}	10 kV	10 kV	10 kV
Voltage protection level mode L-N	U_p	1,3 kV	1,3 kV	1,3 kV
Voltage protection level mode N-PE	U_p	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE	U_p	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating	I_{SCCR}	3 kA	3 kA	3 kA
Maximum overcurrent protection		32 A gL/gG or C 32 A	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A
Response time L-N	t_a	25 ns	25 ns	25 ns
Response time N-PE	t_a	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)		-	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Cross-section of connected conductors stranded (min/max)		-	0,14 mm ² / 1,5 mm ²	0,14 mm ² / 1,5 mm ²
Fault indication		loss of voltage, dark grey indication field		
Degree of protection		IP 20	IP 20	IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard		EN 61643-11:2012, IEC 61643-11:2011 / T2,T3		
Ordering number		A06245	A06243	A06248
				A06222


Accessories

	Product	Ordering number	Example of use
	Adapter DIN 45 mm	A06265	

DA-320-LED

SPD type 3 – surge protective device for LED lights
fault signalling by supply interruption

- surge protection especially for LED lights
- installation close to protected equipment in LV power circuits
- also for equipment in external part of building with low exposure level (according to IEEE C62.41.2)

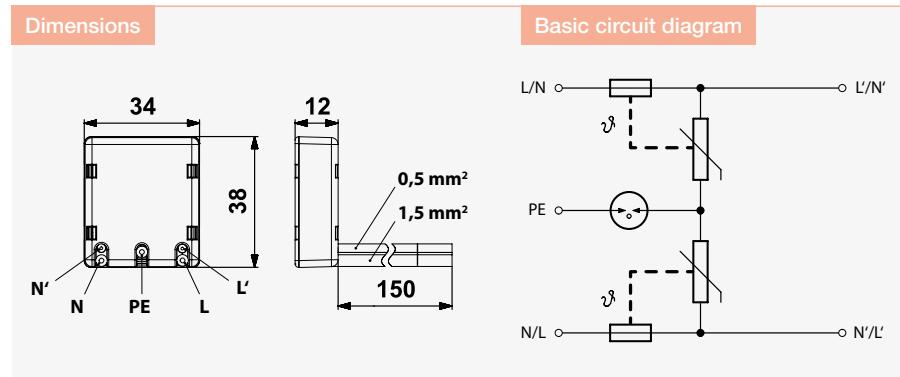

Parameter/Type	DA-320-LED
Nominal voltage	U _n
230 V AC	
Maximum operating voltage	U _c
320 V AC	
Nominal load current	I _L
5 A	
Nominal discharge current (8/20 µs) L-N	I _n
3 kA	
Nominal discharge current (8/20 µs) N-PE	I _n
3 kA	
Nominal discharge current (8/20 µs) L+N-PE	I _n
5 kA	
Test voltage L-N	U _∞
6 kV	
Test voltage N-PE	U _∞
6 kV	
Test voltage L+N-PE	U _∞
10 kV	
Test voltage L-PE	U _∞
6 kV	
Voltage protection level mode L-N	U _p
1,5 kV	
Voltage protection level mode N-PE	U _p
1,5 kV	
Voltage protection level mode L-PE	U _p
1,5 kV	
Short-circuit current rating	I _{SCCR}
1,5 kA	
Maximum overcurrent protection	
B 16 A	
Response time L-N	t _a
25 ns	
Response time N-PE	t _a
100 ns	
Fault indication	
loss of voltage	
Degree of protection	
IP 20	
Range of operating temperatures (min/max)	
-40 °C / 80 °C	
Mounting	
installation box	
According to standard	
EN 61643-11:2012, IEC 61643-11:2011 / T3	
Ordering number	A06740

Surge Protective Devices for photovoltaic systems



Photovoltaic systems



- Protection of PV inverters for photovoltaic systems
- PV solution for family houses
- PV plants
- Protection of off-grid solar inverters
- Protection of battery charges

- Lightning arrester SPD PV Type 1 and 2
- Surge arrester SPD PV Type 2

Protection of photovoltaic systems

Photovoltaic arrays are costly to install and demanding in terms of technology. Their service life must be measured in decades to see a return on the invested funds. Manufacturers usually provide about a twenty-year guarantee for photovoltaic systems.

To provide trouble-free technology throughout its service life, it is necessary to include comprehensive protection against atmospheric and induced overvoltage at the design stage to implement the technology into the project. Protection must be provided not only at the output side of the inverter, but also at the photovoltaic panels.

Solar photovoltaic arrays are usually installed on rooftops, or on a "greenfield".

As for the anticipated risks (pursuant to IEC (EN) 62305-2), direct or near lightning strikes are considered. Overtension or lightning strike can bring about financial loss, and for photovoltaic systems installed on rooftops where individuals could be working, injury should also be considered.

Photovoltaic system designs, including lightning and overvoltage suppression, shall comply with the IEC (HD) 60364-7-712 standard (Electrical installations of buildings – Solar photovoltaic (PV) systems), technical specification CLC/TS 50539-12 (SPD for specific application including DC – Selection and application principles – SPDs connected to PV installations) and standard IEC (EN) 62305 (Lightning protection).

The core (key device) of the whole photovoltaic system is the inverter, so the lightning and surge protection should be focused

on the inverter and, it should be incorporated into the whole lightning and surge protection system. Furthermore, photovoltaic units and their bearing metal structures should be integrated into the grounding design.

SPD selection for DC side:

- U_{CPV} maximum continuous operating voltage
 $U_{OC\ STC}$ standardized test circuit voltage of PV String

$$U_{CPV} \geq 1,2 \times U_{OC\ STC}$$

- If separating spark-over distance "s" is kept
 - SPD PV Type 2 is installed
 - If distance "l" between PV modules and inverter is longer than 10m - SPD is installed on both sides of the DC line
- If separating spark-over distance "s" is not kept
 - SPD PV Type 1 and Type 2 is installed
 - It is always necessary to install SPD PV on both sides of the DC line

General circuit diagram of solar photovoltaic systems

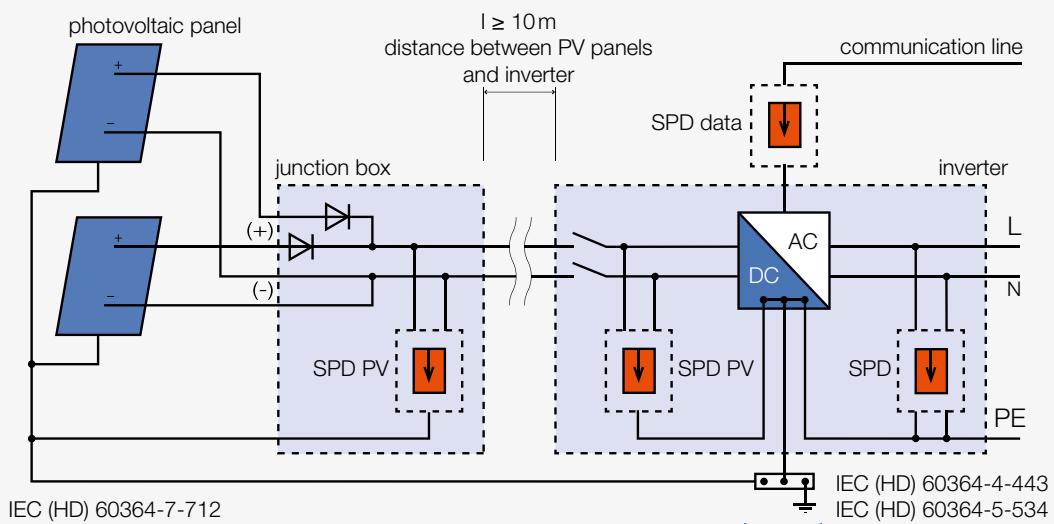


Fig. 1


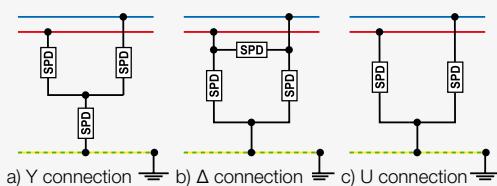


Fig. 2

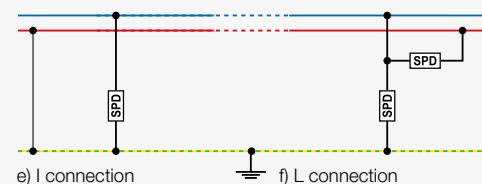


The DC side of the PV system can either be unearthed (insulated) or with one pole earthed. Figures 1 and 2 (see CLC/TS 50 539-12) show how SPDs on the DC side must be connected.

When mounting an SPD, the necessary length of the connecting conductors should be complied with HD 60364-5-534 (IEC 60364-5-53, chapter 534, clause 534.2.9).

FLP-PV550 V/U (S)

SPD PV type 1 and type 2 – lightning current and surge arresters for PV installation
pluggable module, visual fault signalling, module locking

- varistor lightning current arrester and surge arrester in 'U' connection
- for protection of PV systems on the roofs, where the separating spark-over distance is not kept (connection to LPS)
- maximum continuous operating voltage for PV application: $U_{CPV} \geq 1,2 \times U_{OC\ STC}$
- optional remote fault signalling (S)

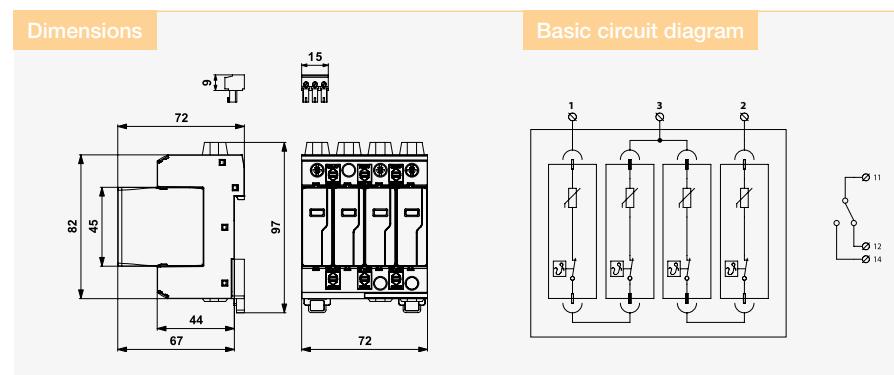

Parameter/Type	FLP-PV550 V/U	FLP-PV550 V/U S
Maximum operating voltage mode 1/2 I-connection U_{CPV}	1 120 V DC	1 120 V DC
Maximum operating voltage mode 1/3, 2/3 U_{CPV}	560 V DC	560 V DC
Total discharge current (10/350 μ s) I_{Total}	25 kA	25 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level mode 1/2 U_p	4,8 kV	4,8 kV
Voltage protection level mode 1/3, 2/3 U_p	2,4 kV	2,4 kV
Short-circuit current rating I_{SCPV}	1 000 A DC	1 000 A DC
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-31, IEC 61643-31	EN 61643-31, IEC 61643-31
Ordering number	A06145	A06146


Spare module	FLP-PV275U V/0	FLP-PV275U V/0
Ordering number	A06147	A06147

FLP-PV1000 V(S)/Y

SPD PV type 1 and type 2 – lightning current and surge arresters for PV installation
pluggable module, visual fault signalling, module locking

- varistor lightning current arrester and surge arrester in 'Y' connection
- for protection of PV systems on the roofs, where the separating spark-over distance is not kept (connection to LPS)

- maximum continuous operating voltage for PV application: $U_{CPV} \geq 1,2 \times U_{OC STC}$
- optional remote fault signalling (S)

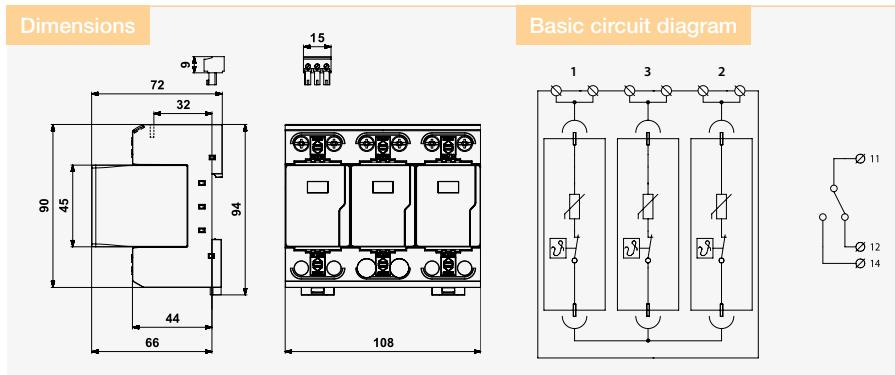


Parameter/Type	FLP-PV1000 V/Y	FLP-PV1000 VS/Y
Maximum operating voltage mode 1/3, 2/3 U_{CPV}	1 000 V DC	1 000 V DC
Lightning impulse current (10/350 µs) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 µs) I_n	30 kA	30 kA
Maximum discharge current (8/20 µs) I_{max}	60 kA	60 kA
Voltage protection level mode 1/2 U_p	3,6 kV	3,6 kV
Voltage protection level mode 1/3, 2/3 U_p	3,6 kV	3,6 kV
Short-circuit current rating I_{SCPV}	1 000 A DC	1 000 A DC
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	-
According to standard	EN 61643-31, IEC 61643-31	EN 61643-31, IEC 61643-31
Ordering number	A04059	A04058

Spare module	FLP-PV500Y V/0	FLP-PV500Y V/0
Ordering number	A04211	A04211

SLP-PV... V/U (S)

SPD PV type 2 - surge arrester for PV installation
pluggable module, visual fault signalling, module locking

- varistor surge arrester in „U“ connection
- for protection of PV systems where the separating spark-over distance is kept or without LPS
- maximum continuous operating voltage for PV application: $U_{CPV} \geq 1,2 \times U_{OC\ STC}$
- optional remote fault signalling (S)

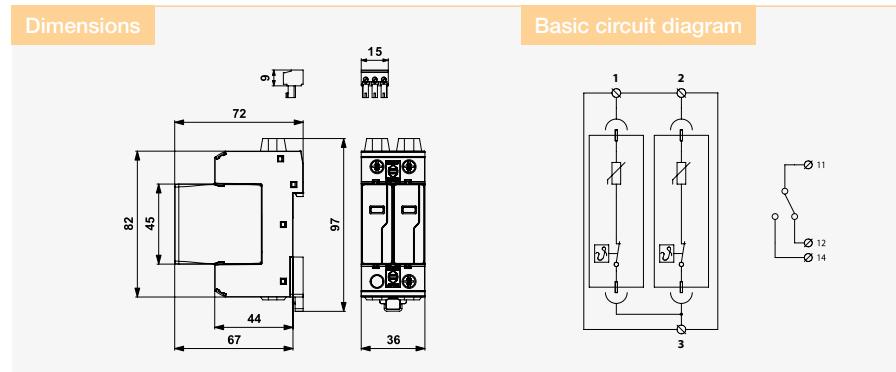


Parameter/Type	SLP-PV170 V/U	SLP-PV170 V/U S	SLP-PV500 V/U	SLP-PV500 V/U S
Maximum operating voltage mode 1/2 I-connection	U_{CPV} 340 V DC	U_{CPV} 340 V DC	U_{CPV} 1 020 V DC	U_{CPV} 1 020 V DC
Maximum operating voltage mode 1/3, 2/3	U_{CPV} 170 V DC	U_{CPV} 170 V DC	U_{CPV} 510 V DC	U_{CPV} 510 V DC
Nominal discharge current (8/20 μ s)	I_n 15 kA	I_n 15 kA	I_n 15 kA	I_n 15 kA
Maximum discharge current (8/20 μ s)	I_{max} 40 kA	I_{max} 40 kA	I_{max} 40 kA	I_{max} 40 kA
Voltage protection level mode 1/2	U_p 1,2 kV	U_p 1,2 kV	U_p 4 kV	U_p 4 kV
Voltage protection level mode 1/3, 2/3	U_p 0,6 kV	U_p 0,6 kV	U_p 2 kV	U_p 2 kV
Short-circuit current rating	I_{SCPV} 1 000 A DC			
Response time	t_a 25 ns	t_a 25 ns	t_a 25 ns	t_a 25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²			
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²			
Fault indication	red indication field	red indication field	red indication field	red indication field
Remote indication	-	potential-free change-over contact	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²	-	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C			
Mounting	DIN rail 35 mm			
According to standard	EN 61643-31, IEC 61643-31			
Ordering number	A03662	A03663	A03664	A03665

Spare module	SLP-PV170U V/0	SLP-PV170U V/0	SLP-PV500U V/0	SLP-PV500U V/0
Ordering number	A03692	A03692	A03694	A03694

SLP-PV... V/Y (S)

SPD PV type 2 – surge arrester for PV installation
pluggable module, visual fault signalling, module locking

- varistor surge arrester in ,Y' connection
- for protection of PV systems where the separating spark-over distance is kept or without LPS
- maximum continuous operating voltage for PV application: $U_{CPV} \geq 1,2 \times U_{OC\ STC}$
- optional remote fault signalling (S)

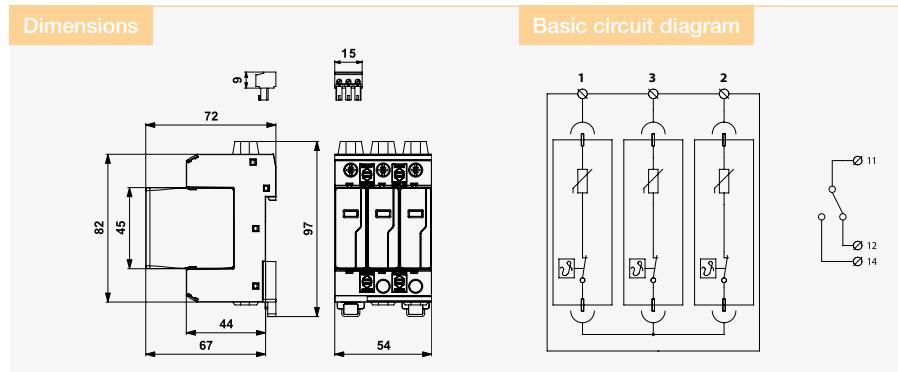


Parameter/Type	SLP-PV700 V/Y	SLP-PV700 V/Y S	SLP-PV1000 V/Y	SLP-PV1000 V/Y S	SLP-PV1500 V/Y	SLP-PV1500 V/Y S
Maximum operating voltage mode 1/3, 2/3 U_{CPV}	750 V DC	750 V DC	1 020 V DC	1 020 V DC	1 500 V DC	1 500 V DC
Nominal discharge current (8/20 μ s) I_n	20 kA	20 kA	15 kA	15 kA	15 kA	15 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA					
Voltage protection level mode 1/2 U_p	3,6 kV	3,6 kV	4 kV	4 kV	6,4 kV	6,4 kV
Voltage protection level mode 1/3, 2/3 U_p	3,6 kV	3,6 kV	4 kV	4 kV	6,4 kV	6,4 kV
Short-circuit current rating I_{SCPV}	1 000 A DC					
Response time t_a	25 ns					
Residual current mode 1/3, 2/3 I_{PE}	-	-	-	-	0,15 mA AC	0,15 mA AC
Residual current mode 1/3, 2/4 I_{PE}	-	-	-	-	0,0008 mA DC	0,0008 mA DC
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²					
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²					
Fault indication	red indication field					
Remote indication	-	potential-free change-over contact	-	potential-free change-over contact	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²	-	1,5 mm ²	-	1,5 mm ²
Degree of protection	IP 20					
Range of operating temperatures (min/max)	-40 °C / 80 °C					
Mounting	DIN rail 35 mm					
According to standard	EN 61643-31, IEC 61643-31					
Ordering number	A03668	A03669	A03670	A03671	A06036	A06037

Spare module	SLP-PV350Y V/0	SLP-PV350Y V/0	SLP-PV500Y V/0	SLP-PV500Y V/0	SLP-PV750Y V/0	SLP-PV750Y V/0
Ordering number	A03744	A03744	A03736	A03736	A06040	A06040


FLP-PV... V/0, SLP-PV... V/0

Replacement modules of SPD for PV

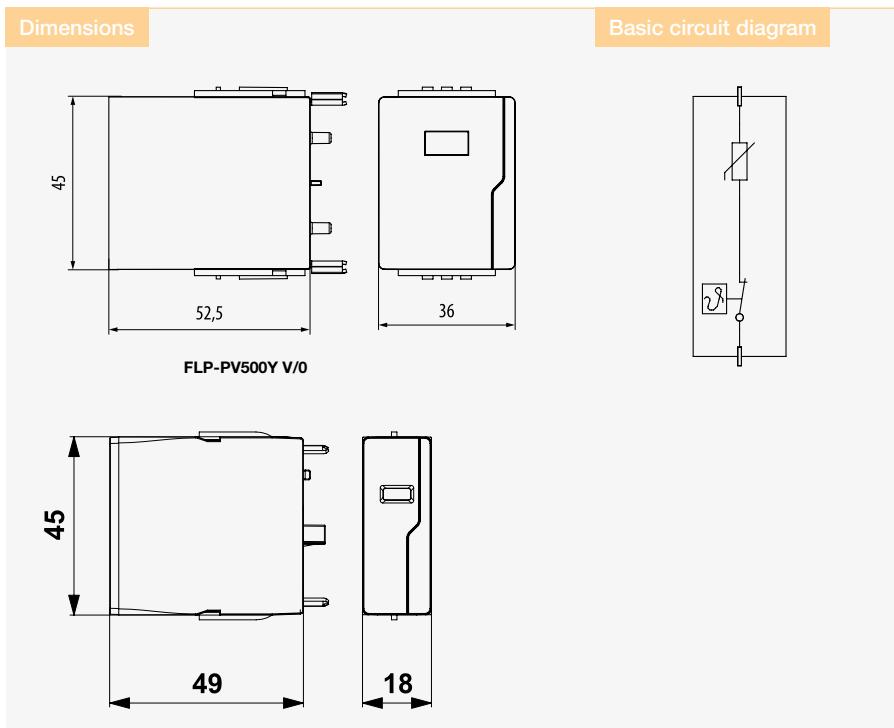

Type	Ordering number
FLP-PV275U V/0	A06147
FLP-PV500Y V/0	A04211
SLP-PV170U V/0	A03692
SLP-PV500U V/0	A03694
SLP-PV350Y V/0	A03744
SLP-PV500Y V/0	A03736
SLP-PV750Y V/0	A06040

Notes

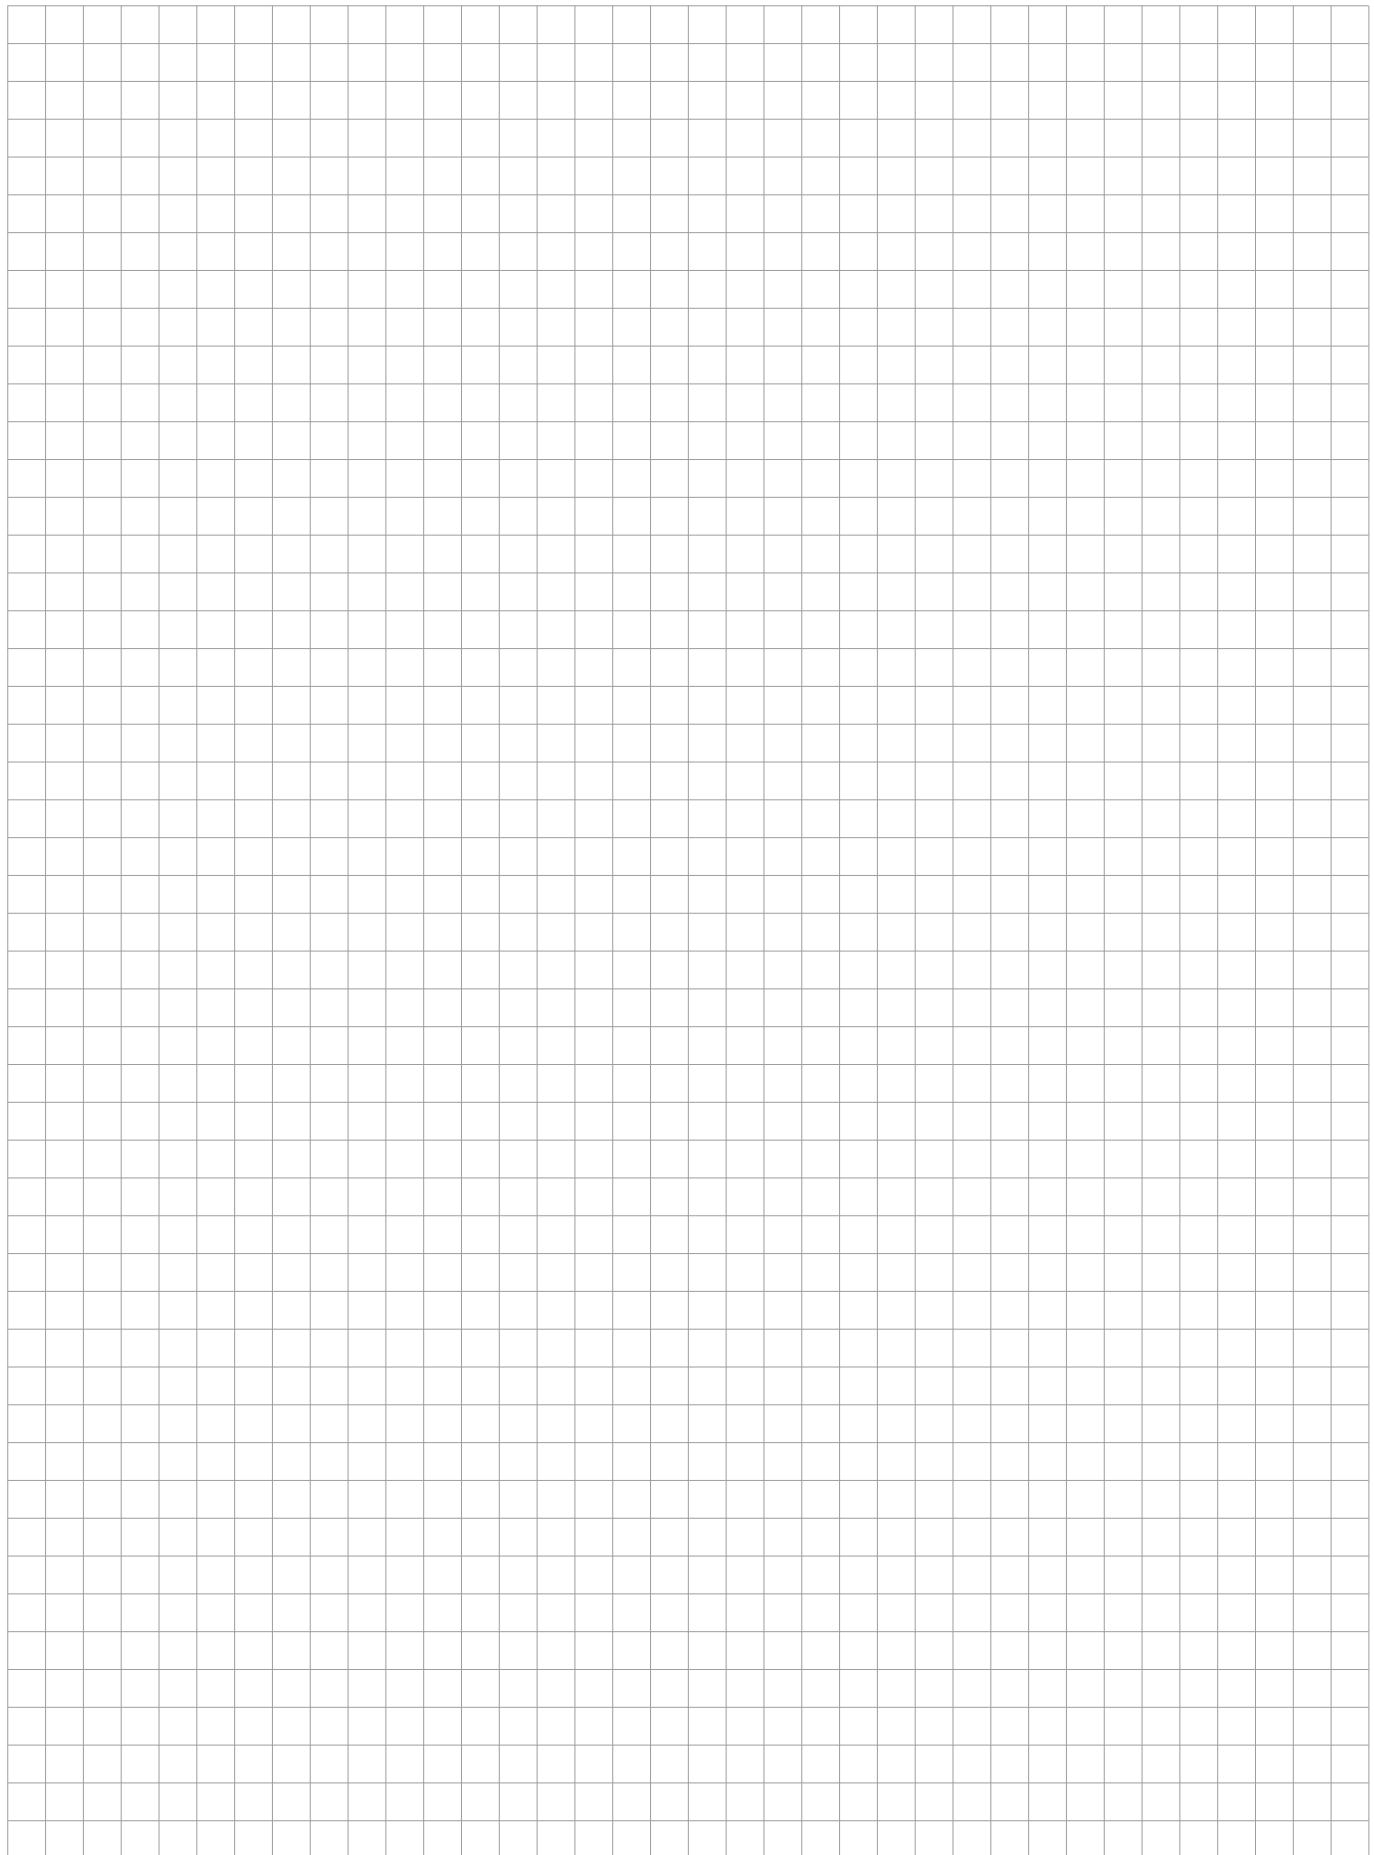

SPDs for data / signalling / telecommunication networks



- Security, Fire Alarm and CCTV systems
- IP technology and data networks (Ethernet)
- ADSL and telecommunications
- Antennas
- Attendance systems
- Control systems for industry

- Lightning Current Arresters ST 1, ST 1+2+3
- Surge Arresters ST 2+3, ST 3

Data, signal and telecommunication protections

The basic principle for surge protection is the **complexity** and **coordination** of devices. The complexity requirement can be met only by installing surge arresters at all inputs and outputs (!) of the given equipment, i.e. it is necessary to protect the power supply line and also the measuring and communication interface. We can ensure coordination by installing devices with various protective effects in sequence into the line or the communication core and the interface.

Criteria to meet the requirement for complexity and coordination particularly include position of installation respective to LPZ boundary, maximum impulse or discharge current, required protection level and response time.

Fig. 1 shows the principle of protection coordination and protection complexity.

In order to select the correct type of dataline protection there must be detailed information about the protected signal:

- Signal peak voltage
- Signal current
- Frequency bandwidth – frequency and signal form
- Conduit in lightning protection zones (LPZ 0 to LPZ 2)
- Longitudinal impedance – maximum line attenuation
- Possibility of steady overvoltage (so-called high-ohm fault)

During the installation of all surge devices, strictly observe the elimination of the coupling between the input of the unprotected line and the output of the protected line and the earthing line. Examples of the most frequent installation errors concerning the coupling between the input and output of the protected line and earth are shown in Fig. 2. This figure also shows an example of correct wiring.

Potential balancing of pulse overvoltage must always proceed outside the protected equipment. Fig. 3 shows the correct wiring of surge arresters in a control system with external power source, communicating with the surroundings via a measuring and communication interface. Potential balancing via the protected equipment is inadmissible.

The table with principle of marking for easier orientation:

Transition from zones	Marking
LPZ 0 – LPZ 1	ST 1
LPZ 1 – LPZ 2	ST 2
LPZ 2 – LPZ 3	ST 3

Example of marking:

Product	Description	Marking
BD-250-T	lightning current arrester	ST 1
BDG-024-V/1-FR1	combined lightning and surge currents arrester	ST 1+2+3
DM-024/1 R DJ	combined surge protection	ST 2+3

Fig. 1 Principle of protection coordination and protection complexity

FLP – lightning current arrester class B
SLP – surge arrester class C
DA – surge protection class D
BD-T – lightning current arrester
DM – combined surge protection
MaR – measurement and control room

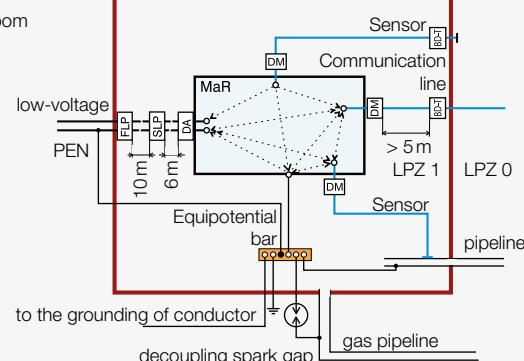


Fig. 2 Coupling between input and output line and earth connection

An unprotected input line should be removed from the protected output line as far as possible


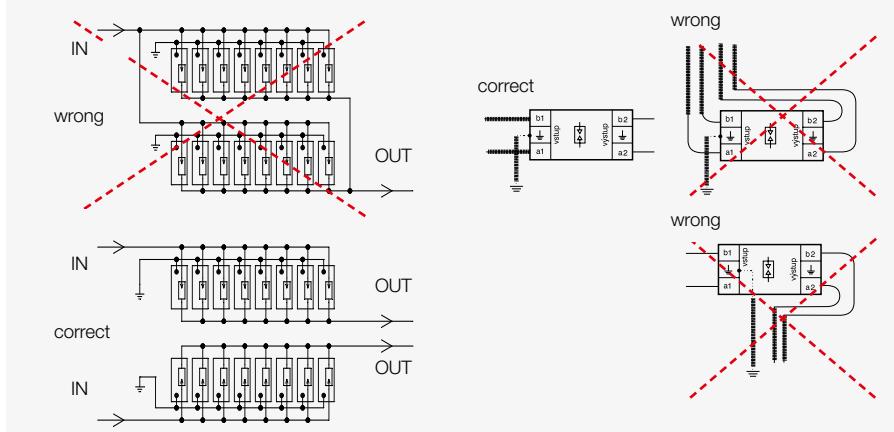


Fig. 3 Principle of the protection of control systems

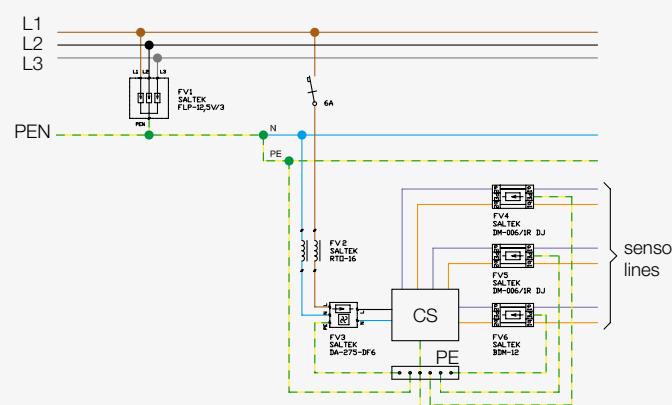

The principle of placing the dataline protections

For easier placing of dataline protections SALTEK introduced a new type of categorization of dataline protections under SALTEK marking ST 1, ST 2 and ST 3. This new designation quite specifically define the placing of dataline protections within the principles of Zonal protection and complies with standards IEC (EN) 61643-21 + A1, A2 and IEC (EN) 62305 - Zonal protection.

Another important thing to note is the fact that the majority of dataline protection is multi-type. The most commonly used protection is two-type, composed of second and third type (ST 2+3). This includes units of the DM line intended to protect communication lines which are inside the building.

For communication lines that go to the outside of the building (i.e. between LPZ 0 to LPZ 1), a combination of devices can be used, i.e. protection DM series (ST 2+3) and lightning current arrester BD type (ST 1) or three-type protection BDM series or BDG (ST 1+2+3). On the Fig. 4 it is clearly shown which variant for which case is suitable.

Given that most of the dataline protection is a multi-type, it must be remembered that these are directional and must be fitted in the correct manor (installed in the correct direction). The communication line (wire) is connected to the input of dataline device and the output of dataline device is connected to the protected equipment as shown in Fig. 5. For comprehensive protection of communication and instrumentation systems, it is necessary that as well as protecting the measuring and datalines, the power supply line must be also protected. Protection of the AC power supply 230 V AC is shown in Fig. 3 (the principle of the protection of control system). When protecting small voltages, the DP units are used. These are adapted for protection of both AC and DC voltage. The signal lines often use shielded cables. The principle of grounding of shielding is shown in Fig. 6 (grounding of shielding).

Maintenance of protective devices

Surge protective devices from SALTEK do not require maintenance during its lifetime. But it is appropriate to provide periodic inspection during the operation and remedy when any problem occurs. The damage of the dataline protection cause the interruption and/or permanent short circuit of the line.

Fig. 4 Coordination distance

An example where coordination distance of 5 m cannot be kept (combined coarse and fine protection, device BDG)

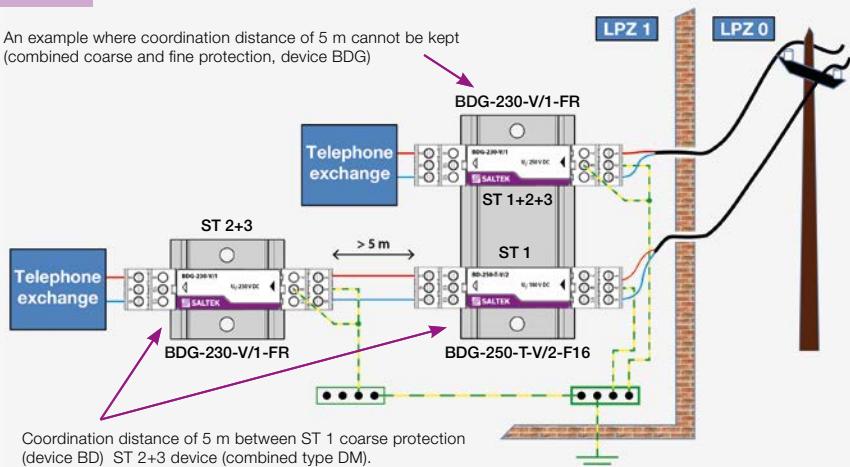


Fig. 5 Protection of electronic security system


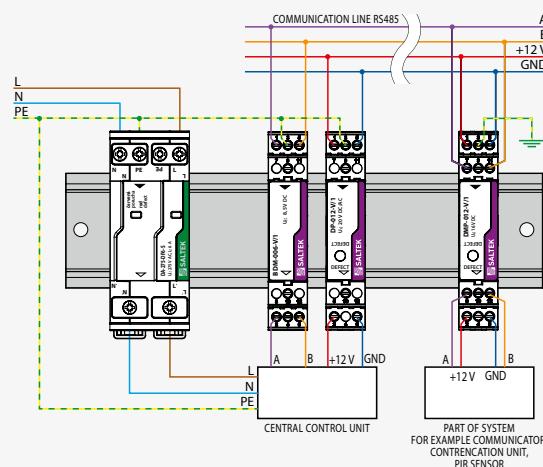


Fig. 6 Grounding of the shielding

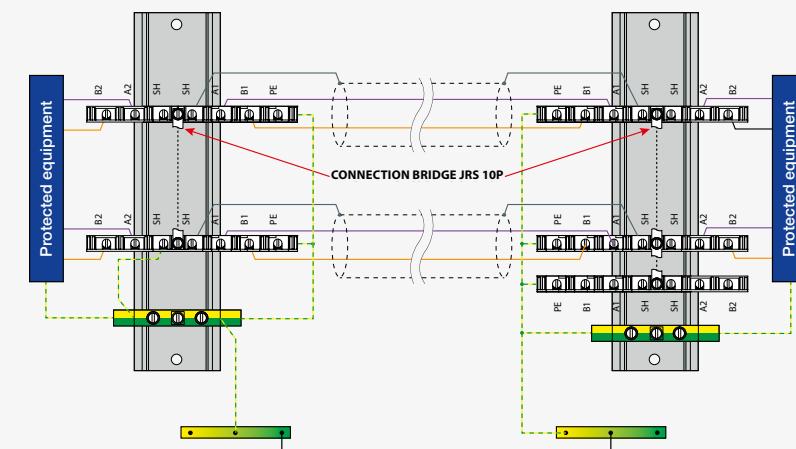

SALTEK® SPD applications in data /signalling / telecommunication systems

MEASURING AND CONTROL TECHNOLOGY AND BUS SYSTEMS								
Interface/Signal	Protected lines	U (DC) [V]	Discharge current per core		SPD xx – corresponding voltage	Mounting	Notes	
			10/350 µs	8/20 µs				
Current loop 0 ÷ 20 mA, 4 ÷ 20 mA	2	12/24	x	10 kA	BDM-xx/1R DJ	DIN 35		
	2	12/24	x	5 kA	DM-xx/1-Ry*	DIN 35		
	4		x	5 kA	CLSA-xx	LSA plus	disconnection	
	2	12/24	x	10 kA	BDM-xx-V/2-FR1	DIN 35		
	2	12/24	x	5 kA	2pcs DM-xx/1 R DJ	DIN 35		
	2	24	x	5 kA	DMG-xx/1-Ry*	DIN 35		
			x	2,5 kA	BDM-xx-V/1-FR1	DIN 35		
Binary signals	2	6 ÷ 230	x	5 kA	CLSA-xx	LSA plus	disconnection	
			x	10 kA	DM-xx/1R DJ	DIN 35		
BLN Building Level Network	2	15/48	x	2,5 kA	BDM-xx-V/1-FR1	DIN 35		
TTL	2	5	x	2,5 kA	BDM-012-V/1-FR1	DIN 35		
			x	10 kA	DM-012/1R DJ	DIN 35		
RS-485 up to 1,5 Mbit/s	2	5	x	2,5 kA	BDM-006-V/1-FR1	DIN 35		
	3	5	x	10 kA	DM-006/1R DJ	DIN 35		
	3/4	5	x	2,5 kA	DM-006/3R DJ	DIN 35		
	4	5	x	10 kA	BDG-006-V/1-4FR1	DIN 35		
RS 485 combined with power line (e.g. security and fire alarm system)	2	12	x	10 kA	DMP-012-V/1-FR1	DIN 35		
		24	x	10 kA	DMP-024-V/1-FR1	DIN 35		
	2	5	x	2,5 kA	BDM-006-V/1-FR1	DIN 35		
	4	5	x	10 kA	DM-006/1R DJ	DIN 35		
RS-422	I = 0,06 A	2	6 ÷ 48	x	10 kA	BDG-006-V/1-4FR1	DIN 35	
	I = 0,37 A	2	6 ÷ 48	x	10 kA	DM-xx/1-L DJ	DIN 35	
			6 ÷ 48	x	5 kA	CLSA-xx	LSA plus	disconnection
	I = 0,5 A	2	6 ÷ 110	x	5 kA	DM-xx/1-Ry*	DIN 35	
			6 ÷ 110	x	5 kA	DMG-xx/1-Ry*	DIN 35	
			24	x	5 kA	DMLF-024/1-Ry*	DIN 35	
	I = 1 A	2	6 ÷ 230	x	2,5 kA	DM-xx/1-R DJ	DIN 35	
			6 ÷ 230	x	10 kA	BDM-xx-V/1-FR1	DIN 35	
			6 ÷ 48	x	10 kA	BDG-xx-V/1-FR1	DIN 35	
	Analog signals	I = 2 A	2	6 ÷ 60	2,5 kA	DM-xx/1-L2 DJ	DIN 35	
Multipurpose coarse protection					2,5 kA	BDM-xx-V/1-FR2	DIN 35	
RS-232-C					2,5 kA	BDG-xx-V/1-FR2	DIN 35	
					x	10 kA	DM-024/1R DJ	DIN 35
Measurement of temperature					x	5 kA	CLSA-006	LSA plus
					2,5 kA	10 kA	BDM-006-V/1-FR1	DIN 35
					x	10 kA	DM-006/1R DJ	DIN 35
Pt-100, Pt-1000 Ni-1000, NTC, PTC	3	up to 6	x	10 kA	DM-006/3R DJ	DIN 35		
	3/4	up to 6	x	2,5 kA	BDG-006-V/1-4FR1	DIN 35		
	4	up to 6	x	10 kA	DM-006/4R DJ	DIN 35		
Optron protocol	2	6 ÷ 24	x	2,5 kA	BDM-006-V/1-FR1	DIN 35		
			x	10 kA	DM-xx/1R DJ	DIN 35	floating	

* By means version of the terminal block: RS - screw terminals, RB - screwless terminals

MEASURING AND CONTROL TECHNOLOGY AND BUS SYSTEMS							
Interface/Signal	Protected lines	U (DC) [V]	Discharge current per core		SPD xx – corresponding voltage	Mounting	Notes
			10/350 µs	8/20 µs			
DC power supply	I = 16 A	2	12 ÷ 48	x 2 kA	DP-xxxDC-16	DIN 35	
		2	12 ÷ 60	x 2 kA	DP-xx-V/1-FR16	DIN 35	
KNX TP (EIB)		2	24	2,5 kA 10 kA	BDG-024/V-1-FR1	DIN 35	
				x 10 kA	DMG-024/1-RB	DIN 35	
M-Bus (Meter Bus)		2	36	2,5 kA 10 kA	BDM-048/V-1-FR1	DIN 35	
				2,5 kA 10 kA	DM-048/1R DJ	DIN 35	
CAN-Bus communication max. 1,5 Mbit/s		2	6	x 10 kA	DM-006/1R DJ	DIN 35	
		2	6	2,5 kA 10 kA	BDM-006/V-1-FR1	DIN 35	
Device Net communication 500 kbit/s	I = 2 A	2	24	2,5 kA 10 kA	BDM-024/V-1-FR2	DIN 35	
				x 10 kA	DM-024/1L2 DJ	DIN 35	
	I = 2 A	2	5	2,5 kA 10 kA	BDM-006/V-1-FR2	DIN 35	
	I = 1 A	2	24	2,5 kA 10 kA	BDM-024/V-1-FR1	DIN 35	
C-Bus Honeywell communication max. 0,9 Mbit/s		2	5	x 10 kA	DM-006/1R DJ	DIN 35	
		2	5	2,5 kA 10 kA	BDM-006/V-1-FR1	DIN 35	
Dupline		2	15	2,5 kA 10 kA	BDG-012/V-1-FR1	DIN 35	
E-Bus (Honeywel)		2	48	2,5 kA 10 kA	BDG-048/V-1-FR1	DIN 35	
Fieldbus Foundation		2	30	2,5 kA 10 kA	BDG-048/V-1-FR1	DIN 35	
Genius I/O Bus		2	12	2,5 kA 10 kA	BDG-012/V-1-FR1	DIN 35	
FIPPI/FIPWAY		2	30	2,5 kA 10 kA	BDG-048/V-1-FR1	DIN 35	
INTERBUS INLINE		2	48	2,5 kA 10 kA	BDG-048/V-1-FR1	DIN 35	
K-Bus		2	24	2,5 kA 10 kA	BDG-024/V-1-FR1	DIN 35	
LUXMATE-Bus		2	24	2,5 kA 10 kA	BDG-024/V-1-FR1	DIN 35	
Procontic CS31 (RS-232)		2	15	2,5 kA 10 kA	BDM-024/V-1-FR1	DIN 35	
Profibus-DP/FMS high-speed lines	up to 1,5 Mbit/s	2	9	x 10 kA	DM-006/1R DJ	DIN 35	
		2	6	2,5 kA 10 kA	BDM-006/V-1-FR1	DIN 35	
	up to 20 Mbit/s	9	18	x 150 A	DL-RS DD9	Canon	
		2	6/15	x 5 kA	DMHF-xx/V-1-Ry*	DIN 35	
	up to 50 Mbit/s	3/4	6/24	2,5 kA 10 kA	BDMHF-xx-V/1-4FR1	DIN 35	
		2	6/24	2,5 kA 10 kA	BDMHF-xx-V/1-FR1	DIN 35	
		2	6 ÷ 24	2,5 kA 10 kA	BDGHF-xx-V/1-FR1	DIN 35	
		2+2	6 ÷ 24	2,5 kA 10 kA	BDGHF-xx-V/2-FR1	DIN 35	
R-Bus		2	6	2,5 kA 10 kA	BDG-006/V-1-FR1	DIN 35	
SDLS		2	6	x 5 kA	CLSA-6	Krone LSA+	
Securilan-LON-Bus		2	6	2,5 kA 10 kA	BDG-006/V-1-FR1	DIN 35	
SIGMA SYS (Siemens EPS)		2	48	2,5 kA 10 kA	BDG-048/V-1-FR1	DIN 35	
SS97 SINIS (RS-232)		2	15	2,5 kA 10 kA	BDM-024/V-1-FR1	DIN 35	
SUCONET		2	6	2,5 kA 10 kA	BDG-006/V-1-FR1	DIN 35	
TELEPERM M analog input		2	12	2,5 kA 10 kA	BDM-012/V-1-FR1	DIN 35	
		2	24	x 5 kA	CLSA-12	Krone LSA+	
		2	24	x 5 kA	CLSA-24	Krone LSA+	
		2	48	x 10 kA	DM-048/1L DJ	DIN 35	
TELEPERM M binary I/O	2	48	2,5 kA 10 kA	BDM-048/V-1-FR1	DIN 35		
	2	12	x 10 kA	DM-012/1L DJ	DIN 35		
	2	12	2,5 kA 10 kA	BDM-012/V-1-FR1	DIN 35		
TELEPERM MFM100		2	12	2,5 kA 10 kA	BDG-012/V-1-FR1	DIN 35	
TTY		2	6 ÷ 24	x 10 kA	DM-xxx/1R DJ	DIN 35	
		2	6 ÷ 24	2,5 kA 10 kA	BDM-xxx/V-1-FR1	DIN 35	
Potential-free (isolated) contacts	1	6 ÷ 110	x 10 kA	DMJ-xx/V-2-Ry*	DIN 35		
			2,5 kA 10 kA	BDM-xx-V/2-JFR1	DIN 35		
			2,5 kA 10 kA	BDM-xx-V/2-JFR2	DIN 35		
			2,5 kA 10 kA	BDM-xx-V/4-JFR1	DIN 35		
			2,5 kA 10 kA	BDM-xx-V/4-JFR1	DIN 35		
Protection against power crossing of lines up to 400 V	2	24/48	x 5 kA	DMS-xx	DIN 35		

SALTEK® SPD applications in data /signalling / telecommunication systems

TELECOMMUNICATIONS, TELEPHONE SYSTEMS							
Interface/Signal	Protected lines	U (DC) (V)	Discharge current per core		SPD xx – corresponding voltage	Mounting	Notes
			10/350 µs	8/20 µs			
ADSL analog line	2	170	x	5 kA	CLSA-TLF	LSA plus	disconnection
			x	5 kA	CLSA-DSL	LSA plus	disconnection
			x	2,5 kA	DL-TLF-UHF	DIN 35	
			2,5 kA	10 kA	BDG-230-V/1-FR	DIN 35	
			2,5 kA	x	BD-250-T-V/2-16	DIN 35	
Analog telephone line	2	170	x	5 kA	CLSA-TLF	LSA plus	disconnection
			x	2,5 kA	DL-TLF-UHF	DIN 35	
			2,5 kA	10 kA	BDG-230-V/1-FR	DIN 35	
			2,5 kA	x	BD-250-T-V/2-16	DIN 35	
DATEX-P	2	24	x	5 kA	CLSA-24	LSA plus	disconnection
			x	5 kA	DMG-024-1R-Ry*	DIN 35	
			2,5 kA	10 kA	BDG-024-V/1-FR1	DIN 35	
ISDN U _{k0}	2	120	x	2,5 kA	DL-ISDN RJ45	DIN 35	
			x	5 kA	CLSA-ISDN	LSA plus	disconnection
			x	5 kA	CLSA-24	LSA plus	disconnection
Modem M1	2	15	x	5 kA	DMG-024 1R-Ry*	DIN 35	isolated signal ground
			2,5 kA	10 kA	BDG-024-V/1-FR1	DIN 35	
			2,5 kA	10 kA	BDM-24-V/1-FR1	DIN 35	
Telephony systems (eg. Siemens, HICOM, ALCATEL)	2	170	x	5 kA	CLSA-TLF	LSA plus	disconnection
			x	2,5 kA	DL-TLF-UHF	DIN 35	
			2,5 kA	x	BD-250-T-V/2-16	DIN 35	
T-DSL	2	170	x	5 kA	CLSA-DSL	LSA plus	disconnection
			x	5 kA	CLSA-TLF	LSA plus	disconnection
			x	2,5 kA	DL-TLF-UHF	DIN 35	
			2,5 kA	10 kA	BDGHF-230-V/1-FR	DIN 35	
			2,5 kA	10 kA	BDGHF-230-V/2-FR	DIN 35	
			2,5 kA	x	BD-250-T-V/2-16	DIN 35	
Multipurpose coarse protection	2	180	x	2,5 kA	BD-250-T-V/2-16	DIN 35	
			x	2,5 kA	BD-250-T-V/2-F16	DIN 35	
			x	2,5 kA	BD-090-T-V/2-16	DIN 35	
			x	2,5 kA	BD-090-T-V/2-F16	DIN 35	
VDSL	2	70	x	2,5 kA	BD-250-T	DIN 35	
			x	2,5 kA	BD-090-T	DIN 35	
			x	2,5 kA	FAX-OVERDRIVE ...		
			x	5 kA	CLSA-DSL	LSA plus	disconnection
VDSL2, VDSL3	2	60	x	2,5 kA	DL-TLF-UHF	DIN 35	
			x	2,5 kA	BD-250-T-V/2-16	DIN 35	

* Ry means version of the terminal: RS - screw, RB - screwless

ETHERNET AND GENERAL STRUCTURED CABLING								
Application	Protected pairs	Max. bitrate	Impulse current per core [A]		PoE compatibility (IEEE802.3)	SPD type	Mounting	LPZ location
			10/350 µs	8/20 µs				
Gigabit Ethernet (without PoE)	4	10 Gbps	x	200	NO	DL-Cat. 6A	DIN 35	LPZ 1 ->
	4	10 Gbps	x	200	NO	DL-Cat.6A-M (-R-M)	DL-PL-RACK-1U	LPZ 1 ->
	4	1 Gbps	250	150	af/at/bt	DL-1G-RJ45-PoE-AB	DIN 35	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-RJ45-PoE-AB	DIN 35	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-PoE-IP66	outdoor panel/pole	LPZ 0 ->
	4	1 Gbps	250	150	af/at/bt	DL-1G-POE-M	DL-PL-RACK-1U	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-POE-M	DL-PL-RACK-1U	LPZ 0 _B ->
	4	10 Gbps	x	200	af/at/bt	DL-Cat.6A-60V-M (-R-M)	DL-PL-RACK-1U	LPZ 1 ->
	4	10 Gbps	x	200	af/at/bt	DL-Cat.6A-60V	DIN 35	LPZ 1 ->
	4	1 Gbps	250	150	af/at	DL-1G-POE-INJECTOR	DIN 35	LPZ 0 _B ->
Gigabit Ethernet with PoE	4	1 Gbps	250	150	af/at	DL-1G-POE-PCB-INJECTOR	DL-CS-RACK-1U-INJECTOR	LPZ 0 _B ->
	4	1 Gbps	250	150	af/at/bt	DL-1G-60V-PoE	DIN 35	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-60V-PoE	DIN 35	LPZ 0 _B ->
	4	10 Gbps	x	200	af/at/bt	DL-Cat.6A-60V-M (-R-M)	DL-PL-RACK-1U	LPZ 1 ->
	4	1 Gbps	250	150	af/at/bt	DL-1G-60V-PoE-M	DL-PL-RACK-1U	LPZ 0 _B ->
General structured cabling (IP telephony, KNX, DMX, RS-485,...)	4	10 Gbps	250	150	af/at/bt	DL-10G-60V-PoE-M	DL-PL-RACK-1U	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-PoE-M	DL-PL-RACK-1U	LPZ 1 ->
	4	1 Gbps	250	150	af/at/bt	DL-1G-60V-PoE-M	DL-PL-RACK-1U	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-60V-PoE-M	DL-PL-RACK-1U	LPZ 0 _B ->
Ethernet, Fast Ethernet, Token Ring, CDDI/FDDI	4	10 Gbps	x	200	NO	DL-Cat. 6A	DIN 35	LPZ 1 ->
	2 + 1 PoE	500 Mbps	x	1500	af	DL-Cat.5e POE plus	DIN 35	LPZ 1 ->
	4	10 Gbps	x	200	NO	DL-Cat.6A-M (-R-M)	DL-PL-RACK-1U	LPZ 1 ->

SALTEK® SPD applications in data /signalling / telecommunication systems

TELECOMMUNICATIONS AND RADIOTRANSMISSIONS (COAXIAL INTERFACES)									
Application	Power load CW* [W]	Frequency range [GHz]	Max. DC load [A]	Impulse current per core [kA]		SPD type	Connectors	Impedance	LPZ location
				10/350 µs	8/20 µs				
Transmitters	45	DC - 3,8	6	2,5	10	HX-090 SMA50	SMA (F/M)	50 Ω	LPZ 0 ->
	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	295	DC - 3,8	6	2,5	10	HX-230 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	570	DC - 3,5	6	2,5	10	HX-350 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	1175	DC - 3,0	6	2,5	10	HX-470 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	tuning based	tuned (NB)	NO	5	20	ZX-xxx N50	N (F/F)	50 Ω	LPZ 0 ->
	45	DC - 3,8	6	2,5	10	HX-090 SMA50	SMA (F/M)	50 Ω	LPZ 0 ->
Transceivers, cellular networks (GSM, GSM-R, UMTS, 3G, LTE, 4G, 5G, TETRA,...)	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	295	DC - 3,8	6	2,5	10	HX-230 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	570	DC - 3,5	6	2,5	10	HX-350 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	1175	DC - 3,0	6	2,5	10	HX-470 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	tuning based	tuned (NB)	NO	5	20	ZX-xxx N50	N (F/F)	50 Ω	LPZ 0 ->
	x	DC - 3,8	6	2,5	10	HX-090 SMA50	SMA (F/M)	50 Ω	LPZ 0 ->
	x	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
Professional receivers (GPS, Galileo, Glonass, Beidou, SAT LNB, measuring and monitoring receivers,...)	x	DC - 3,0	0,7	0,5	2,5	SX-090-B50 F/F	BNC (F/F)	50 Ω	LPZ 0_b ->
	x	DC - 2,15	4	2,5	10	FX-090-F75 F/F	F (F/F)	75 Ω	LPZ 0 ->
	x	DC - 2,15	0,7	0,5	2,5	SX-090-F75 F/F	F (F/F)	75 Ω	LPZ 0_b ->
	x	DC - 2,15	4	2,5	10	FX-090 F75 T F/F	F (F/F)	75 Ω	LPZ 0 ->
	x	DC - 2,15	4	2,5	10	FX-090-F75 F/F	F (F/F)	75 Ω	LPZ 0 ->
Commercial TV/SAT receivers (DVB-T2, DVB-S2,...)	x	DC - 2,15	4	2,5	10	FX-090-F75 F/F	F (F/F)	75 Ω	LPZ 0 ->
	x	DC - 2,15	0,7	0,5	2,5	SX-090-F75 F/F	F (F/F)	75 Ω	LPZ 0_b ->
Microwave PtP links (split)	45	DC - 3,8	6	2,5	10	HX-090 SMA50	SMA (F/M)	50 Ω	LPZ 0 ->
	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
Microwave PtP links (all outdoor)	x	0,5	2x 1 (PoE)	0,25	0,15	DL-10G-PoE-IP66	RJ45	100 Ω	LPZ 0 ->
Coaxial video networks (CCTV, analogue)	x	0,15	0,06	x	5	VL-B75 F/F	BNC (F/F)	75 Ω	LPZ 1 ->
	x	DC - 2,15	4	2,5	10	FX-090-F75 F/F	F (F/F)	75 Ω	LPZ 0 ->
	x	DC - 2,15	0,7	0,5	2,5	SX-090-F75 F/F	F (F/F)	75 Ω	LPZ 0_b ->
WLAN, WiFi (coaxial interfaces)	45	DC - 3,8	6	2,5	10	HX-090 SMA50	SMA (F/M)	50 Ω	LPZ 0 ->
	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω	LPZ 0 ->
	x	DC - 3,0	0,7	0,5	2,5	SX-090-B50 F/F	BNC (F/F)	50 Ω	LPZ 0_b ->

* A correction related to the signal peak power (PAPR, Crest factor) should be done for digital signal modulations (OFDM etc.)

SPDs for data / signalling / telecommunication networks

Devices with pluggable module




- SPDs with coarse and fine protection
- Pluggable modules for easy replacement
- For 1 up to 4-core lines
- Multiple core lines save the space
- All variants in “F” version
with separated line and protective earth

- Line BD – lightning current arresters
- Line BDM – for 2/3/4-core communication lines
- Line BDG – with separated signal ground
and protective earth
- Line BDMHF, BDGHF – for high-speed lines
- Line DMP – for protection of signal
and low-voltage power line
- Line DP – for extra-low voltage circuits

Overview of SPDs for data / signalling / telecommunication networks


Devices with pluggable module

BD-...-T...

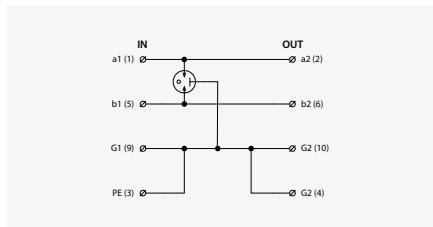


2 core line incoming from LPZ 0 to structure.
See page: 109

BDM-...

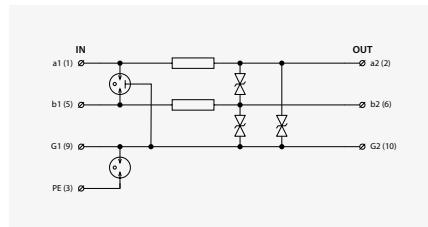


2-3 core line incoming from LPZ 0 to structure with one-pole connected with ground.
See page: 110-113

BDG-...

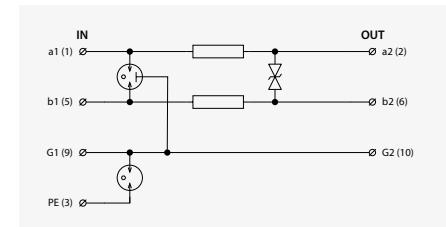


2 core floating line incoming from LPZ 0 to structure.
See page: 114-117

BDM-...-J...

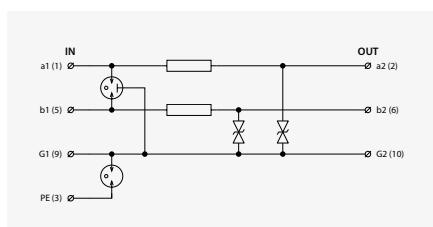


Single core lines.
See page: 118-120

BDG-...-4...

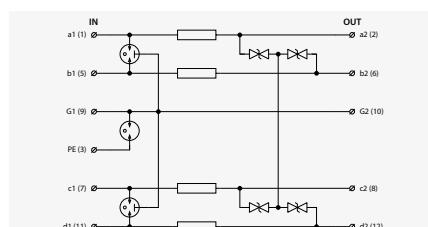


3-4 core floating line.
See page: 121

BDMHF-...

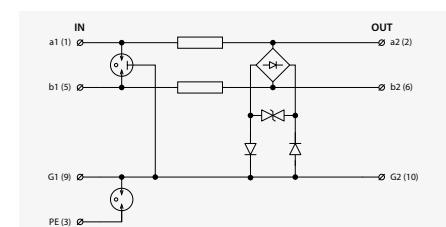


2 or 3 cores high-speed line.
See page: 122

BDMHF-...-4...

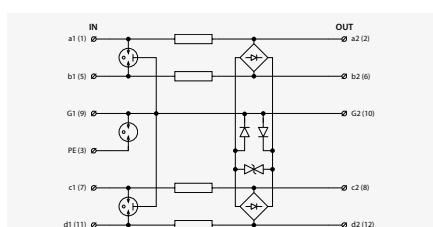


3-4 core high-speed line.
See page: 123

BDGHF-...

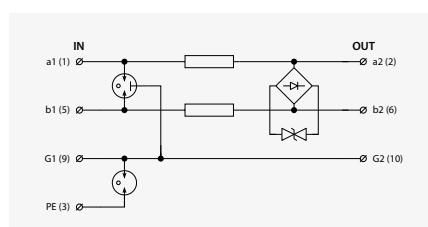


2 core high-speed floating line.
See page: 124-125

DMG-024-V1-4FR1-DIF

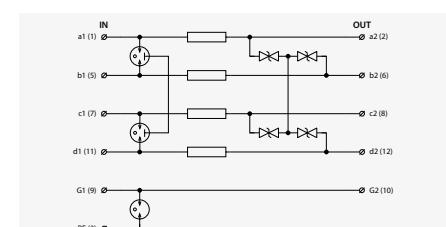


Up to 4 core line with differential surge protection.
Line separated from ground.
See page: 126

DMP-...

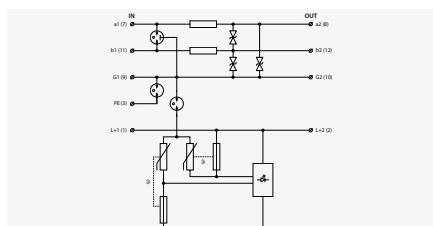


2 core line combined with power supply.
See page: 127

DMP-...-J...

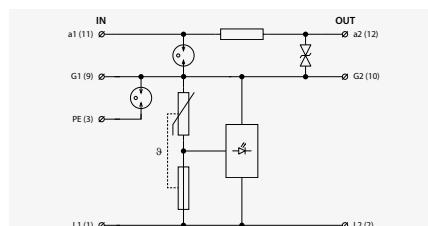


Single core line combined with power supply.
See page: 128

DP-...-16

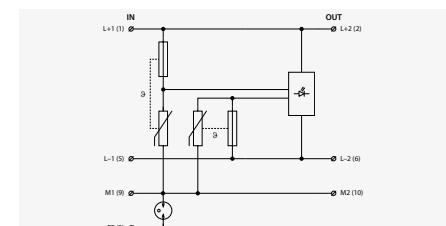

Power supply 12, 24, 48, 60 V up to 16 A.
See page: 129

DMZ-V-0 (Accessories)

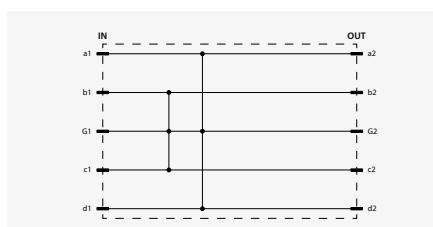


Short-circuiting module for maintenance of signalling lines.
See page: 200

BD-...-T-V/2-(F)16

Lightning current arresters, ST1 with plugable module
pluggable module

- lightning current arrester of two 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- mainly for protection of telecommunication lines against surge voltage
- in "F" version is the line separated from protective earth via GDT

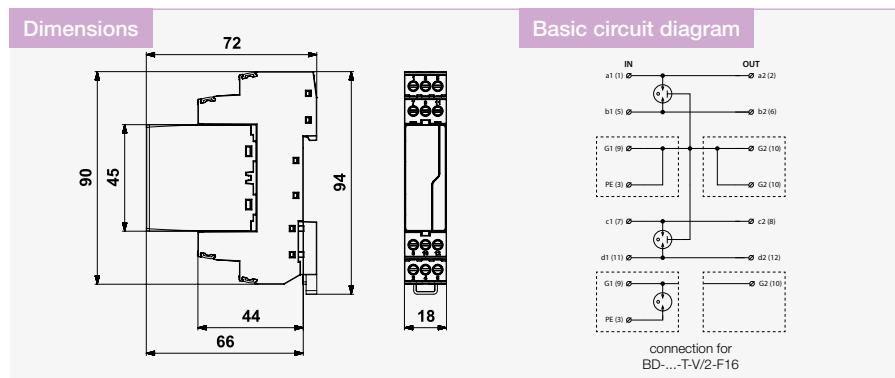

Parameter / Type	BD-090-T-V/2-16	BD-250-T-V/2-16	BD-090-T-V/2-F16	BD-250-T-V/2-F16
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1	ST 1	ST 1	ST 1
Maximum operating voltage	U_c 50 V AC / 70 V DC	U_c 128 V AC / 180 V DC	U_c 50 V AC / 70 V DC	U_c 128 V AC / 180 V DC
Nominal load current	I_L 16 A	I_L 16 A	I_L 16 A	I_L 16 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n -	I_n -	I_n 20 kA	I_n 20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{total} 20 kA	I_{total} 20 kA	I_{total} 20 kA	I_{total} 20 kA
D1 impulse discharge current (10/350 μ s) core-core	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p -	U_p -
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p -	U_p -	U_p 550 V	U_p 550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s	U_p -	U_p -	U_p 550 V	U_p 550 V
Response time core-core	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns
Response time core-PE	t_a 100 ns	t_a 100 ns	t_a -	t_a -
Response time GND-PE	t_a -	t_a -	t_a 100 ns	t_a 100 ns
Response time core-GND	t_a -	t_a -	t_a 100 ns	t_a 100 ns
Threshold frequency core-core	f 120 MHz	f 120 MHz	f 120 MHz	f 120 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A05550	A05551	A05554	A05555

Spare module	BD-090-T-V/2-0	BD-250-T-V/2-0	BD-090-T-V/2-0	BD-250-T-V/2-0
Ordering number	A05390	A05391	A05390	A05391


BDM-...-V/1-FR1

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- coarse and fine surge protection of 2/3-core telecommunication, data and other lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building

- for protection of telecommunication lines (version BDM-230) and communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

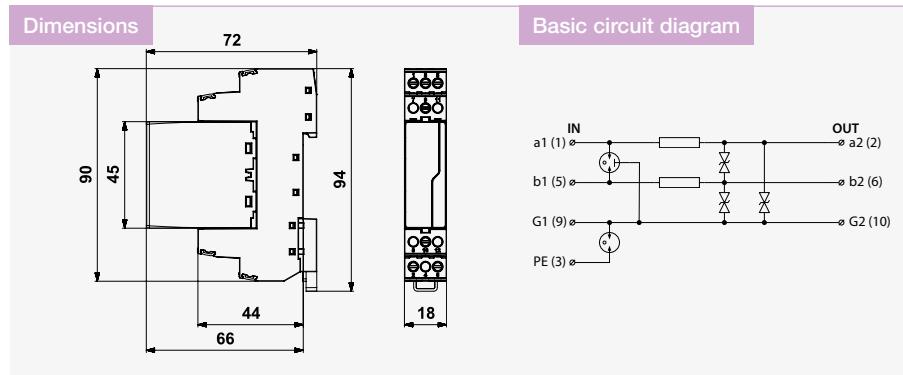

Parameter / Type	BDM-006-V/1-FR1	BDM-012-V/1-FR1	BDM-024-V/1-FR1	BDM-048-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	1 A	1 A	1 A	1 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA
D1 impulse discharge current (10/350 μ s) core-core I_{Imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω
Threshold frequency core-core f	0,8 MHz	2 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A05709	A05710	A05711	A05712

Spare module	BDM-006-V/1-0	BDM-012-V/1-0	BDM-024-V/1-0	BDM-048-V/1-0
Ordering number	A05501	A05502	A05503	A05504


BDM-...-V/1-FR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- coarse and fine surge protection of 2/3-core telecommunication, data and other lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building

- for protection of telecommunication lines (version BDM-230) and communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

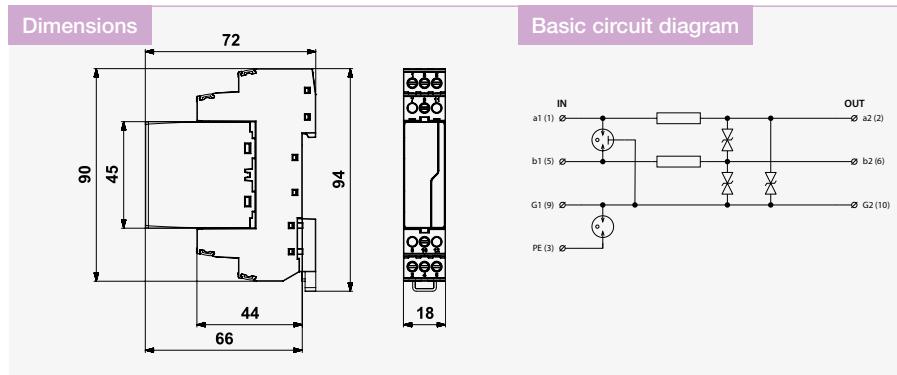

Parameter / Type	BDM-060-V/1-FR1	BDM-230-V/1-FR	BDM-230-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U_n 60 V DC	U_n 230 V DC	U_n 230 V DC
Maximum operating voltage	U_c 45 V AC / 64 V DC	U_c 177 V AC / 250 V DC	U_c 177 V AC / 250 V DC
Nominal load current	I_L 1 A	I_L 0,5 A	I_L 1 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	I_n 20 kA	I_n 20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA
D1 impulse discharge current (10/350 μ s) core-core	I_{Imp} 85 V	I_{Imp} 350 V	I_{Imp} 350 V
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 550 V	I_{Total} 550 V	I_{Total} 550 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 85 V	U_p 350 V	U_p 350 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 2,5 kA	U_p 2,5 kA	U_p 2,5 kA
C3 voltage protection level mode core-GND at 1 kV/ μ s	U_p 5 kA	U_p 5 kA	U_p 5 kA
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time GND-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns
Response time core-GND	t_a 1 ns	t_a 1 ns	t_a 1 ns
Serial resistance per core	R 0,8 Ω	R 3,3 Ω	R 1,6 Ω
Threshold frequency core-core	f 6,5 MHz	f 11 MHz	f 11 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2		
Ordering number	A06438	A05713	A06461

Spare module	BDM-060-V/1-0	BDM-230-V/1-0	BDM-230-V/1-0
Ordering number	A06437	A05505	A05505


BDM-...-V/1-FR2

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with plugable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 2/3-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

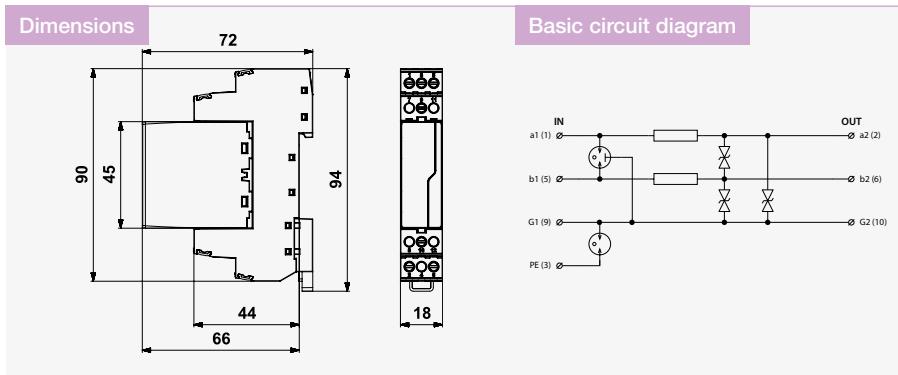

Parameter / Type	BDM-006-V/1-FR2	BDM-012-V/1-FR2	BDM-024-V/1-FR2	BDM-048-V/1-FR2	BDM-060-V/1-FR2
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U_n 6 V DC	U_n 12 V DC	U_n 24 V DC	U_n 48 V DC	U_n 60 V DC
Maximum operating voltage	U_c 6 V AC / 8,5 V DC	U_c 11 V AC / 16 V DC	U_c 25 V AC / 36 V DC	U_c 36 V AC / 51 V DC	U_c 45 V AC / 64 V DC
Nominal load current	I_L 2 A	I_L 2 A	I_L 2 A	I_L 2 A	I_L 2 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	I_n 20 kA	I_n 20 kA	I_n 20 kA	I_n 20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	U_p 22 V	U_p 46 V	U_p 65 V	U_p 85 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA
C3 voltage protection level mode core-GND at 1 kV/ μ s	U_p 12 V	U_p 22 V	U_p 46 V	U_p 65 V	U_p 85 V
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time GND-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns
Response time core-GND	t_a 1 ns	t_a 1 ns	t_a 1 ns	t_a 1 ns	t_a 1 ns
Serial resistance per core	R 0,4 Ω	R 0,4 Ω	R 0,4 Ω	R 0,4 Ω	R 0,4 Ω
Threshold frequency core-core	f 0,8 MHz	f 2 MHz	f 4 MHz	f 5 MHz	f 6,5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2				
Ordering number	A06385	A06398	A06411	A06424	A06439

Spare module	BDM-006-V/1-0	BDM-012-V/1-0	BDM-024-V/1-0	BDM-048-V/1-0	BDM-060-V/1-0
Ordering number	A05501	A05502	A05503	A05504	A06437


BDM-...-V/2-FR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with plugable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

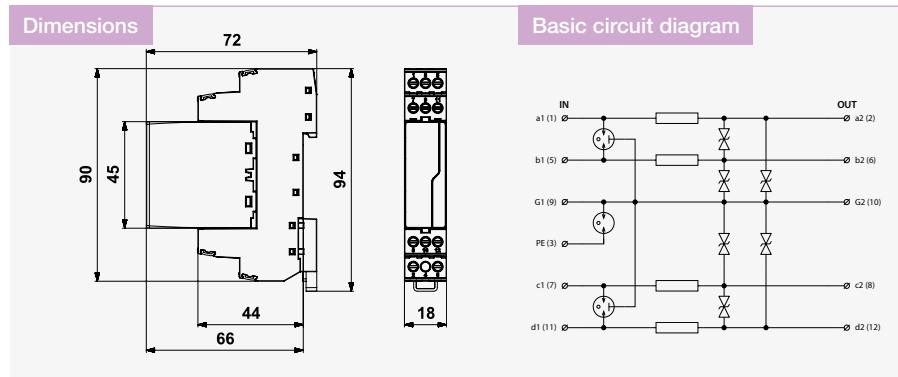

Parameter/Type	BDM-006-V/2-FR1	BDM-012-V/2-FR1	BDM-024-V/2-FR1	BDM-048-V/2-FR1	BDM-060-V/2-FR1	BDM-230-V/2-FR
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC	60 V DC	230 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC	177 V AC / 250 V DC
Nominal load current I_L	1 A	1 A	1 A	1 A	1 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V	85 V	350 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V	550 V	550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V	85 V	350 V
D1 lightning impulse current (10/350 μ s) per core I_{imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA	2,5 kA	1 ns
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA	5 kA	2,5 kA
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns	1 ns	5 kA
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω	3,3 Ω
Threshold frequency core-core f	0,8 MHz	2 MHz	4 MHz	5 MHz	6,5 MHz	11 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2					
Ordering number	A06388	A06401	A06414	A06427	A06443	A06464

Spare module	BDM-006-V/2-0	BDM-012-V/2-0	BDM-024-V/2-0	BDM-048-V/2-0	BDM-060-V/2-0	BDM-230-V/2-0
Ordering number	A06387	A06400	A06413	A06426	A06442	A06463


BDG-...-V/1-FR1

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- coarse and fine surge protection of shielded 2-core telecommunication, data and other lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building

- for protection of telecommunication lines (version BDG-230) and communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly the measuring circuits) against impact of surge voltage

- coarse and fine surge protection (core – core) and coarse protection (core – GND) in differential mode, coarse surge protection in common mode (line – PE)

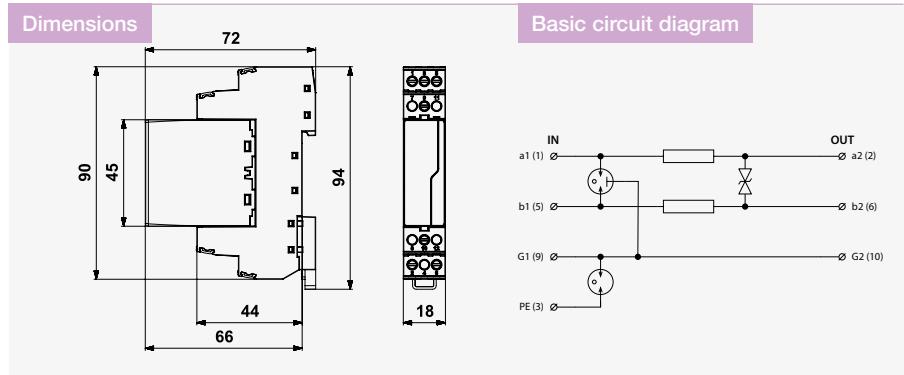

Parameter / Type	BDG-006-V/1-FR1	BDG-012-V/1-FR1	BDG-024-V/1-FR1	BDG-048-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	1 A	1 A	1 A	1 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA
D1 impulse discharge current (10/350 μ s) core-core I_{Imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	100 ns	100 ns	100 ns	100 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω
Threshold frequency core-core f	1,2 MHz	3 MHz	6 MHz	7 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A05704	A05705	A05706	A05707

Spare module	BDG-006-V/1-0	BDG-012-V/1-0	BDG-024-V/1-0	BDG-048-V/1-0
Ordering number	A05399	A05400	A05401	A05402


BDG-...-V/1-FR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- coarse and fine surge protection of shielded 2-core telecommunication, data and other lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building

- for protection of telecommunication lines (version BDG-230) and communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly the measuring circuits) against impact of surge voltage

- coarse and fine surge protection (core – core) and coarse protection (core – GND) in differential mode, coarse surge protection in common mode (line – PE)

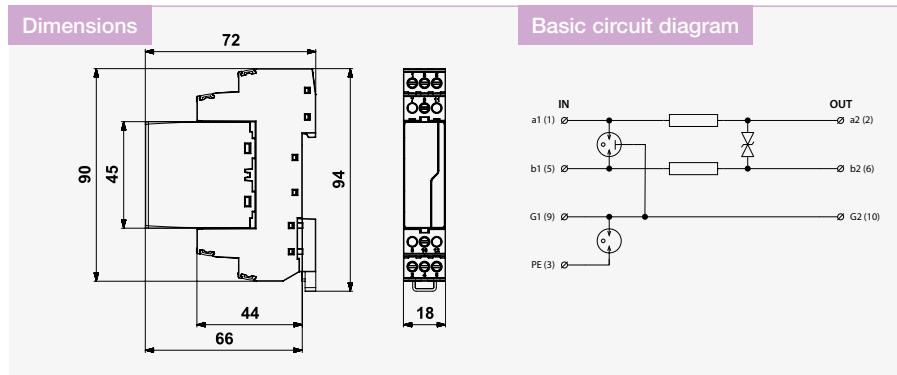

Parameter / Type	BDG-060-V/1-FR1	BDG-230-V/1-FR	BDG-230-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U _n	60 V DC	230 V DC
Maximum operating voltage	U _c	45 V AC / 64 V DC	177 V AC / 250 V DC
Nominal load current	I _L	1 A	0,5 A
C2 nominal discharge current (8/20 µs) per core	I _n	10 kA	10 kA
C2 nominal discharge current (8/20 µs) GND-PE	I _n	20 kA	20 kA
C2 total discharge current (8/20 µs) cores-PE	I _{Total}	20 kA	20 kA
D1 impulse discharge current (10/350 µs) core-core	I _{Imp}	85 V	350 V
D1 total discharge current (10/350 µs) cores-PE	I _{Total}	550 V	550 V
C3 voltage protection level mode core-core at 1 kV/µs	U _p	550 V	550 V
C3 voltage protection level mode GND-PE at 1 kV/µs	U _p	2,5 kA	2,5 kA
C3 voltage protection level mode core-GND at 1 kV/µs	U _p	5 kA	5 kA
Response time core-core	t _a	1 ns	1 ns
Response time GND-PE	t _a	100 ns	100 ns
Response time core-GND	t _a	100 ns	100 ns
Serial resistance per core	R	0,8 Ω	3,3 Ω
Threshold frequency core-core	f	10 MHz	16 MHz
Cross-section of connected conductors solid (min/max)		0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)		0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection		IP 20	IP 20
Range of operating temperatures (min/max)		-40 °C / 70 °C	-40 °C / 70 °C
Mounting		DIN rail 35 mm	DIN rail 35 mm
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2	
Ordering number	A06499	A05708	A06514

Spare module	BDG-060-V/1-0	BDG-230-V/1-0	BDG-230-V/1-0
Ordering number	A06498	A05403	A05403


BDG-...-V/1-FR2

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C (version BDG-230), MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of

- surge voltage
- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

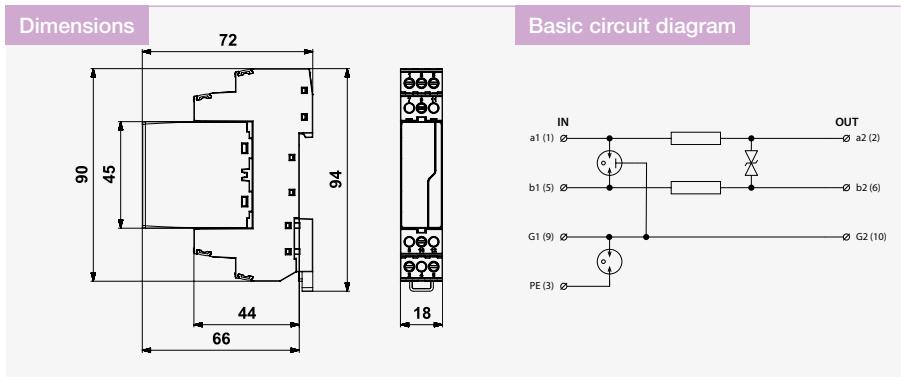

Parameter / Type	BDG-006-V/1-FR2	BDG-012-V/1-FR2	BDG-024-V/1-FR2	BDG-048-V/1-FR2	BDG-060-V/1-FR2
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U_n 6 V DC	U_n 12 V DC	U_n 24 V DC	U_n 48 V DC	U_n 60 V DC
Maximum operating voltage	U_c 6 V AC / 8,5 V DC	U_c 11 V AC / 16 V DC	U_c 25 V AC / 36 V DC	U_c 36 V AC / 51 V DC	U_c 45 V AC / 64 V DC
Nominal load current	I_L 2 A	I_L 2 A	I_L 2 A	I_L 2 A	I_L 2 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 nominal discharge current (8/20 μ s) per core GND-PE	I_n 20 kA	I_n 20 kA	I_n 20 kA	I_n 20 kA	I_n 20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	U_p 22 V	U_p 46 V	U_p 65 V	U_p 85 V
C3 voltage protection level mode core GND-PE at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time GND-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns
Response time core-GND	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns
Serial resistance per core	R 0,4 Ω	R 0,4 Ω	R 0,4 Ω	R 0,4 Ω	R 0,4 Ω
Treshold frequency core-core	f 1,2 MHz	f 3 MHz	f 6 MHz	f 7 MHz	f 10 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2				
Ordering number	A06469	A06477	A06485	A06493	A06500

Spare module	BDG-006-V/1-0	BDG-012-V/1-0	BDG-024-V/1-0	BDG-048-V/1-0	BDG-060-V/1-0
Ordering number	A05399	A05400	A05401	A05402	A06498


BDG-...-V/2-FR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge

- voltage
- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

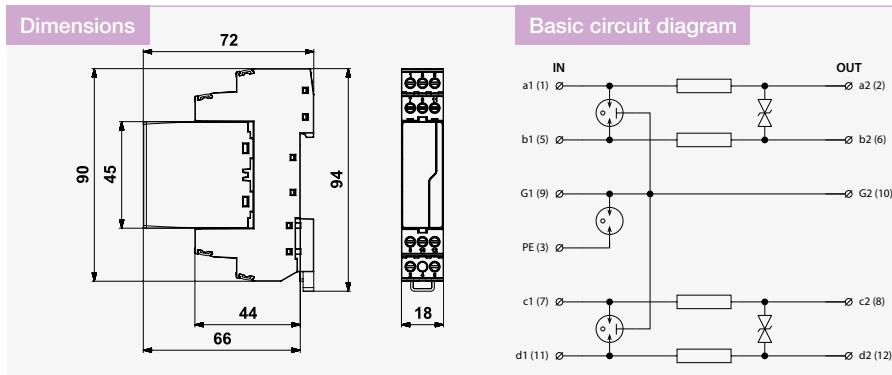

Parameter / Type	BDG-006-V/2-FR1	BDG-012-V/2-FR1	BDG-024-V/2-FR1	BDG-048-V/2-FR1	BDG-060-V/2-FR1	BDG-230-V/2-FR
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U _n 6 V DC	12 V DC	24 V DC	48 V DC	60 V DC	230 V DC
Maximum operating voltage	U _c 6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC	177 V AC / 250 V DC
Nominal load current	I _L 1 A	1 A	1 A	1 A	1 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I _n 10 kA	10 kA	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) per core GND-PE	I _n 20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I _{Total} 20 kA	20 kA	20 kA	20 kA	20 kA	10 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U _p 12 V	22 V	46 V	65 V	85 V	350 V
C3 voltage protection level mode core GND-PE at 1 kV/ μ s	U _p 550 V	550 V	550 V	550 V	550 V	550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s	U _p 550 V	550 V	550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 μ s) per core	I _{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I _{Total} 5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Response time core-core	t _a 1 ns	1 ns	1 ns	1 ns	1 ns	1 ns
Response time GND-PE	t _a 100 ns	100 ns	100 ns	100 ns	100 ns	100 ns
Response time core-GND	t _a 100 ns	100 ns	100 ns	100 ns	100 ns	100 ns
Serial resistance per core	R 0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω	3,3 Ω
Threshold frequency core-core	f 1,2 MHz	3 MHz	6 MHz	7 MHz	10 MHz	16 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2					
Ordering number	A06472	A06480	A06488	A06496	A06504	A06517

Spare module	BDG-006-V/2-0	BDG-012-V/2-0	BDG-024-V/2-0	BDG-048-V/2-0	BDG-060-V/2-0	BDG-230-V/2-0
Ordering number	A06471	A06479	A06487	A06495	A06503	A06516


BDM-...-V/2-JFR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with plugable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for two 1-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones or higher, at the line entry into building and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – GND) in differential mode and coarse surge protection in common mode (line – PE)

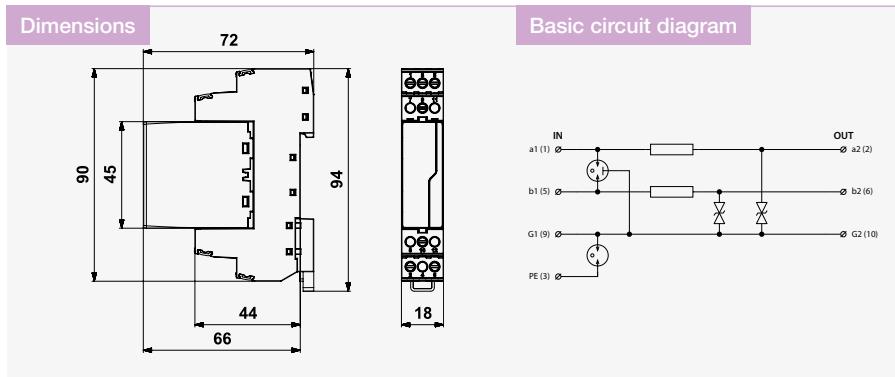

Parameter / Type	BDM-006-V/2-JFR1	BDM-006-V/2-JFR2	BDM-012-V/2-JFR1	BDM-012-V/2-JFR2
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	6 V DC	12 V DC	12 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	6 V AC / 8,5 V DC	11 V AC / 16 V DC	11 V AC / 16 V DC
Nominal load current I_L	1 A	2 A	1 A	2 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s U_p	12 V	12 V	22 V	22 V
D1 lightning impulse current (10/350 μ s) per core I_{imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,4 Ω	0,8 Ω	0,4 Ω
Threshold frequency core-GND f	0,8 MHz	0,8 MHz	2 MHz	2 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06390	A06391	A06403	A06404

Spare module	BDM-006-V/2-J-0	BDM-006-V/2-J-0	BDM-012-V/2-J-0	BDM-012-V/2-J-0
Ordering number	A06389	A06389	A06402	A06402


BDM-...-V/2-JFR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with plugable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for two 1-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones or higher, at the line entry into building and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – GND) in differential mode and coarse surge protection in common mode (line – PE)

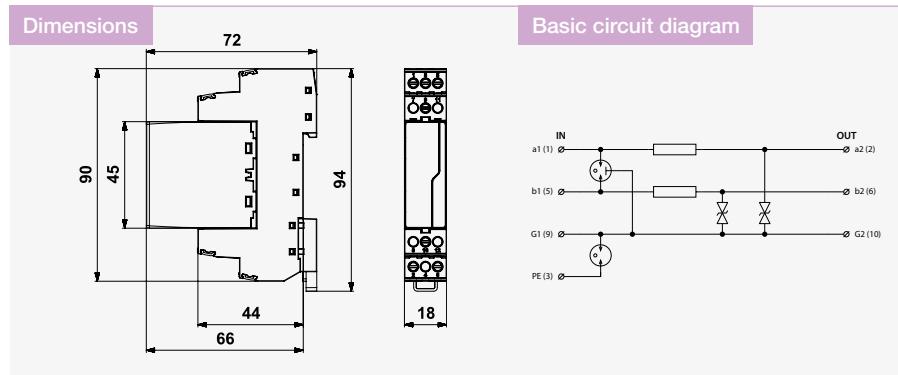

Parameter / Type	BDM-024-V/2-JFR1	BDM-024-V/2-JFR2	BDM-048-V/2-JFR1	BDM-048-V/2-JFR2
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	24 V DC	24 V DC	48 V DC	48 V DC
Maximum operating voltage U_c	25 V AC / 36 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	36 V AC / 51 V DC
Nominal load current I_L	1 A	2 A	1 A	2 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core GND-PE at 1 kV/ μ s	U_p 550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s	U_p 46 V	46 V	65 V	65 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	5 kA	5 kA	5 kA
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,4 Ω	0,8 Ω	0,4 Ω
Threshold frequency core-GND f	4 MHz	4 MHz	5 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06416	A06417	A06429	A06430

Spare module	BDM-024-V/2-J-0	BDM-024-V/2-J-0	BDM-048-V/2-J-0	BDM-048-V/2-J-0
Ordering number	A06415	A06415	A06428	A06428


BDM-...-V/4-JFR1

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with plugable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 4-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

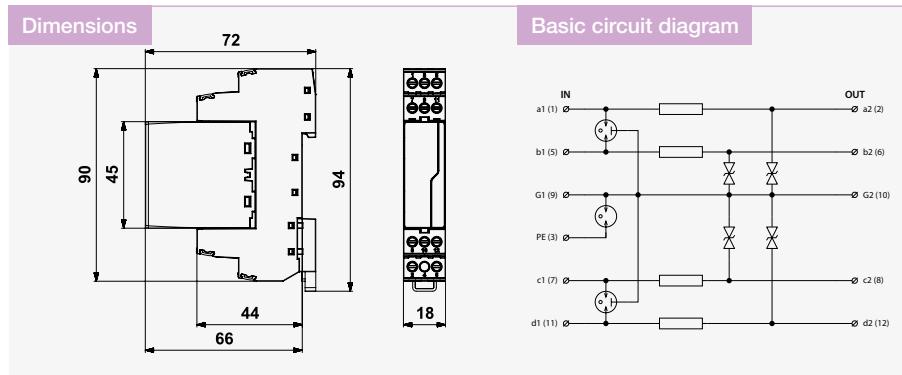

Parameter / Type	BDM-006-V/4-JFR1	BDM-012-V/4-JFR1	BDM-024-V/4-JFR1	BDM-048-V/4-JFR1
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	1 A	1 A	1 A	1 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V
D1 lightning impulse current (10/350 μ s) per core I_{imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω
Threshold frequency core-GND f	0,8 MHz	2 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06396	A06409	A06422	A06435

Spare module	BDM-006-V/4-J-0	BDM-012-V/4-J-0	BDM-024-V/4-J-0	BDM-048-V/4-J-0
Ordering number	A06395	A06408	A06421	A06434


BDG-...-V/1-4FR1

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for up to 4-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

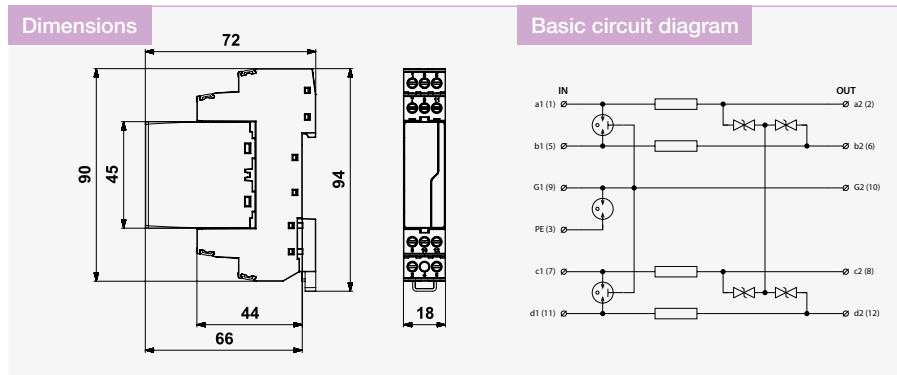

Parameter / Type	BDG-006-V/1-4FR1	BDG-012-V/1-4FR1	BDG-024-V/1-4FR1	BDG-048-V/1-4FR1
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U _n 6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage	U _c 6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current	I _L 1 A	1 A	1 A	1 A
C2 nominal discharge current (8/20 µs) per core	I _n 10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 µs) GND-PE	I _n 20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 µs) cores-PE	I _{Total} 20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/µs	U _p 18 V	24 V	46 V	90 V
C3 voltage protection level mode GND-PE at 1 kV/µs	U _p 550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/µs	U _p 550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 µs) per core	I _{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 µs) cores-PE	I _{Total} 5 kA	5 kA	5 kA	5 kA
Response time core-core	t _a 1 ns	1 ns	1 ns	1 ns
Response time GND-PE	t _a 100 ns	100 ns	100 ns	100 ns
Response time core-GND	t _a 100 ns	100 ns	100 ns	100 ns
Serial resistance per core	R 0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω
Threshold frequency core-core	f 1,2 MHz	3 MHz	6 MHz	7 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06467	A06475	A06483	A06491

Spare module	BDG-006-V/1-4-0	BDG-012-V/1-4-0	BDG-024-V/1-4-0	BDG-048-V/1-4-0
Ordering number	A06466	A06474	A06482	A06490

BDMHF-...-V/1-FR1


Surge protection for industrial communication bus (eg. PROFIBUS)

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection of 2-core high-speed signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces, MaR systems, mainly the RS-485 and PROFIBUS lines, of I&C, MaR, electronic security and fire detection systems, etc. against impact

- of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

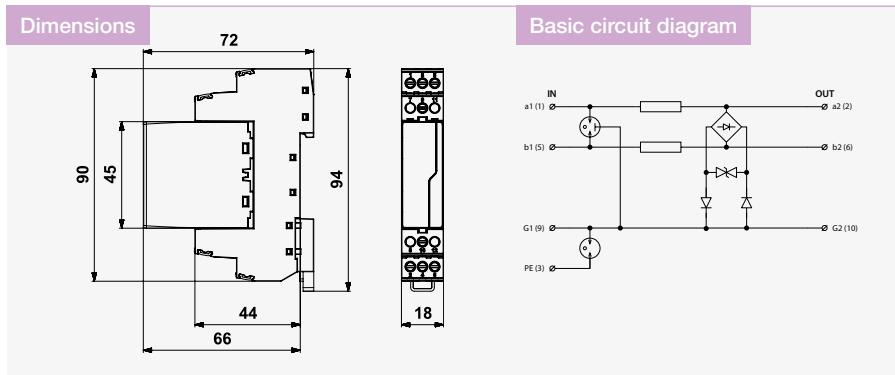

Parameter / Type	BDMHF-006-V/1-FR1	BDMHF-024-V/1-FR1
Connection (input – output)	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3
Nominal voltage	U_n 6 V DC	24 V DC
Maximum operating voltage	U_c 6 V AC / 8,5 V DC	25 V AC / 36 V DC
Nominal load current	I_L 1 A	1 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 14 V	48 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p –	–
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s	U_p 14 V	48 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	5 kA
Response time core-core	t_a 1 ns	1 ns
Response time core-PE	t_a –	–
Response time GND-PE	t_a 100 ns	100 ns
Response time core-GND	t_a 1 ns	1 ns
Serial resistance per core	R 0,8 Ω	0,8 Ω
Threshold frequency core-core	f 70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2	
Ordering number	A06547	A06553

Spare module	BDMHF-006-V/1-0	BDMHF-024-V/1-0
Ordering number	A06543	A06549

BDMHF-...-V/1-4FR1


Surge protection for industrial communication bus (eg. PROFIBUS)

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection of 4-core high-speed signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces, MaR systems, mainly the RS-485 and PROFIBUS lines, of I&C, MaR, electronic security and fire detection systems, etc. against impact

- of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

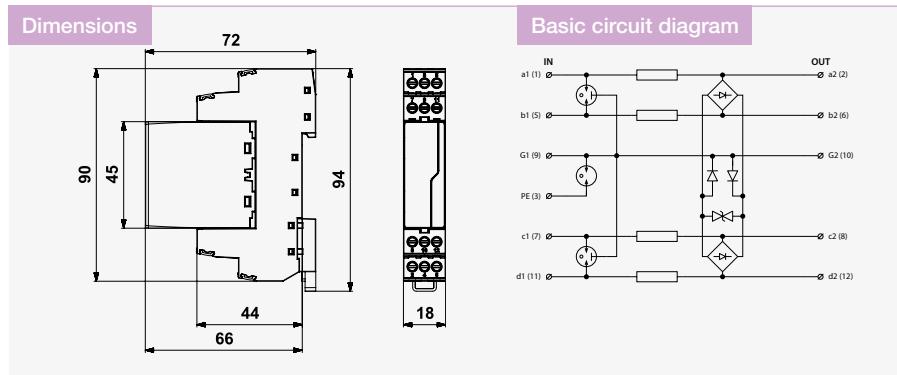

Parameter / Type	BDMHF-006-V/1-4FR1	BDMHF-024-V/1-4FR1
Connection (input – output)	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	24 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	25 V AC / 36 V DC
Nominal load current I_L	1 A	1 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA
C3 volt. prot. lev. mode core-core at 1 kV/ μ s U_p	16 V	48 V
C3 volt. prot. lev. mode core-PE at 1 kV/ μ s U_p	–	–
C3 volt. prot. lev. mode GND-PE at 1 kV/ μ s U_p	550 V	550 V
C3 volt. prot. lev. mode core GND at 1 kV/ μ s U_p	16 V	48 V
D1 lightning impulse current (10/350 μ s) per core I_{imp}	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	–	–
Response time GND-PE t_a	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,8 Ω
Threshold frequency core-core f	70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35mm	DIN rail 35mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2	
Ordering number	A06545	A06551

Spare module	BDMHF-006-V/1-4-0	BDMHF-024-V/1-4-0
Ordering number	A06544	A06550

BDGHF-...-V/1-FR.


Surge protection for industrial communication bus (eg. PROFIBUS)

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection of 2-core high-speed signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of telecommunication lines (version BDGHF-230) and interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485,

- PROFIBUS interfaces) against surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

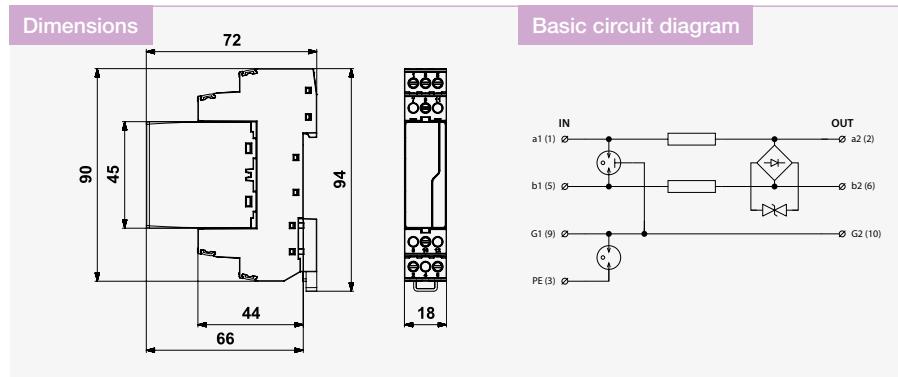

Parameter / Type	BDGHF-006-V/1-FR1	BDGHF-012-V/1-FR1	BDGHF-024-V/1-FR1	BDGHF-230-V/1-FR
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	230 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	177 V AC / 250 V DC
Nominal load current I_L	1 A	1 A	1 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 14 V	24 V	48 V	350 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s	U_p 550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	5 kA	5 kA	5 kA
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	100 ns	100 ns	100 ns	100 ns
Serial resistance per core	R 0,8 Ω	0,8 Ω	0,8 Ω	3,3 Ω
Threshold frequency core-core f	70 MHz	70 MHz	70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06520	A06526	A06532	A06538

Spare module	BDGHF-006-V/1-0	BDGHF-012-V/1-0	BDGHF-024-V/1-0	BDGHF-230-V/1-0
Ordering number	A06519	A06525	A06531	A06537

BDGHF-...-V/2-FR.


Surge protection for industrial communication bus (eg. PROFIBUS)

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection of 2-core high-speed signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of telecommunication lines (version BDGHF-230) and interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485,

- PROFIBUS interfaces) against surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

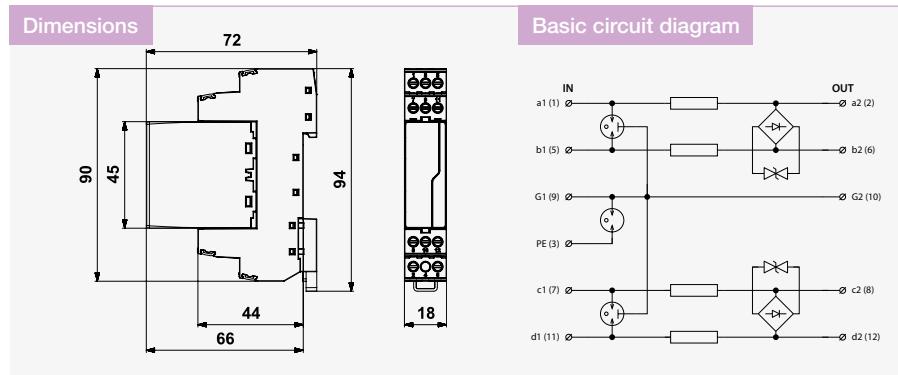


Parameter / Type	BDGHF-006-V/2-FR1	BDGHF-012-V/2-FR1	BDGHF-024-V/2-FR1	BDGHF-230-V/2-FR1
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	230 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	177 V AC / 250 V DC
Nominal load current I_L	1 A	1 A	1 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 14 V	24 V	48 V	350 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s	U_p 550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	5 kA	5 kA	5 kA
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	100 ns	100 ns	100 ns	100 ns
Serial resistance per core	R 0,8 Ω	0,8 Ω	0,8 Ω	3,3 Ω
Threshold frequency core-core f	70 MHz	70 MHz	70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06523	A06529	A06535	A06541

Spare module	BDGHF-006-V/2-0	BDGHF-012-V/2-0	BDGHF-024-V/2-0	BDGHF-230-V/2-0
Ordering number	A06522	A06528	A06534	A06540

DMG-024-V/1-4FR1-DIF

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 with plugable module
pluggable module, coupling impedance (R – resistance), shielding (G) separated from protective earth via GDT

- coarse and fine surge protection for max. 4-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces)
- coarse and fine surge protection only in differential mode (core – core)

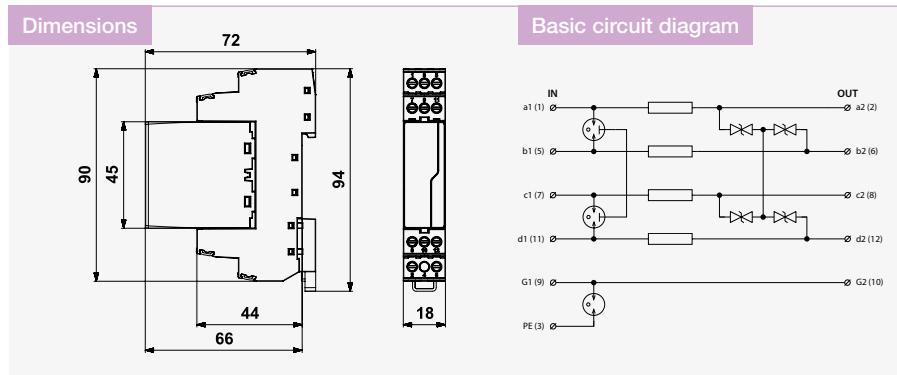

Parameter / Type	DMG-024-V/1-4FR1-DIF
Connection (input – output)	terminals-terminals
Location of SPD	ST 2+3
Nominal voltage	U_n 24 V DC
Maximum operating voltage	25 V AC / 36 V DC
Nominal load current	I_n 1 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 46 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 550 V
Response time core-core	t_a 1 ns
Response time GND-PE	t_a 100 ns
Serial resistance per core	R 0,8 Ω
Threshold frequency core-core	f 6 MHz
Isolation voltage core-GND(PE)	> 4 kV
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2
Ordering number	A06281

Spare module	DMG-024-V/1-4-0
Ordering number	A06282


DMP-...-V/1-FR1

Combination of surge protections for signal and supply lines

pluggable module, coupling impedance (R – resistance) in part of data, line separated from protective earth via GDT

- combination of two-stage surge protection of 2-core signalling line in data part and surge protection for ELV in supply part
- installation close to protected equipment

- for protection of interfaces of I&C, electronic security and fire detection systems, etc., mainly for measuring circuits and sensors where signal and supply are transmitted in one cable, against surge voltage

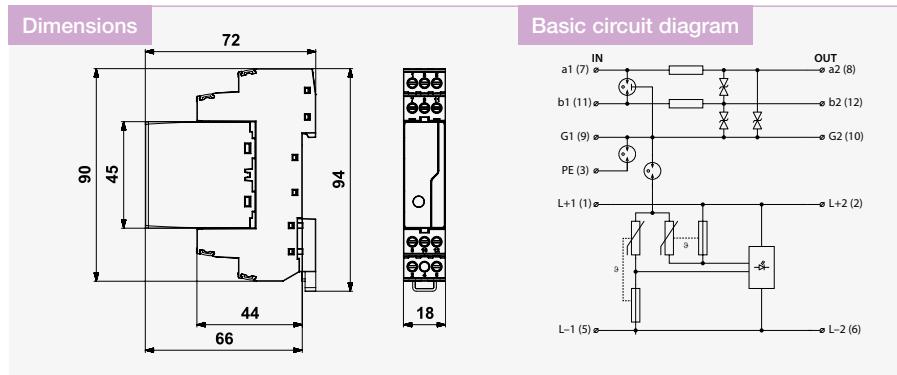

Parameter / Type	DMP-012-V/1-FR1	DMP-024-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage	U_n	12 V DC
Maximum operating voltage	U_c	11 V AC / 16 V DC
Nominal load current	I_L	1 A
C2 total discharge current (8/20 μ s) cores-PE	I_{Total}	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p	22 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p	550 V
Response time core-core	t_a	1 ns
Response time GND-PE	t_a	100 ns
Serial resistance per core	R	0,8 Ω
Treshold frequency core-core	f	2 MHz
Nominal load current	I_L	16 A
Test voltage L+(L-)-PE	U_{oc}	4 kV
Voltage protection level L+ - L-	U_p	0,18 kV
Voltage protection level L+(L-)-PE	U_p	0,95 kV
Maximum overcurrent protection		16 A gL/gG or B 16 A
Response time L+ - L-		25 ns
Response time L+(L-)-PE		100 ns
Fault indication	red indicator	red indicator
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2	
Ordering number	A05798	A05799

Spare module	DMP-012-V/1-0	DMP-024-V/1-0
Ordering number	A05814	A05815

DMP-...-V/1-JFR1


Combination of surge protections for signal and supply lines

pluggable module, coupling impedance (R – resistance) in part of data, line separated from protective earth via GDT

- surge protection of 3-core line comprehend signal transmission and supply
- installation close to protected equipment
- for protection of interfaces of I&C, electronic security and fire detection

systems, etc., mainly for measuring circuits and sensors where signal and supply are transmitted in one cable, against surge voltage

- single common wire for power supply and signal transmission

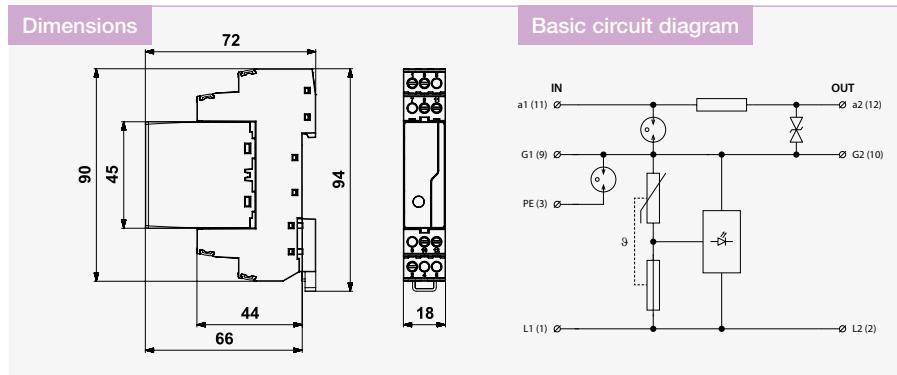

Parameter / Type	DMP-012-V/1-JFR1	DMP-024-V/1-JFR1
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage	U_n	12 V DC
Maximum operating voltage	U_c	11 V AC / 16 V DC
Nominal load current	I_L	1 A
C2 nominal discharge current (8/20 μ s) per core	I_n	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n	10 kA
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p	550 V
Response time core-PE	t_a	1 ns
Response time GND-PE	t_a	100 ns
Response time core-GND	t_a	1 ns
Serial resistance per core	R	0,8 Ω
Threshold frequency core-core	f	2 MHz
Nominal load current	I_L	16 A
Test voltage L+(L)-PE	U_{oc}	4 kV
Voltage protection level L+(L)-PE	U_p	0,75 kV
Maximum overcurrent protection		16 A gL/gG or B 16 A
Response time L+(L)-PE		100 ns
Fault indication	red indicator	red indicator
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2	
Ordering number	A05802	A05803


Spare module	DMP-012-V/1-J-0	DMP-024-V/1-J-0
Ordering number	A05816	A05817

DP-...-V/1-F16

Surge protection for ELV power supply networks, with plugable module
pluggable module, visual fault signalling, middle conductor separated from protective earth via GDT

- surge protection for all types of LV electric and electronic equipments against surge voltage
- installation to LV installations, close to protected equipment

- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

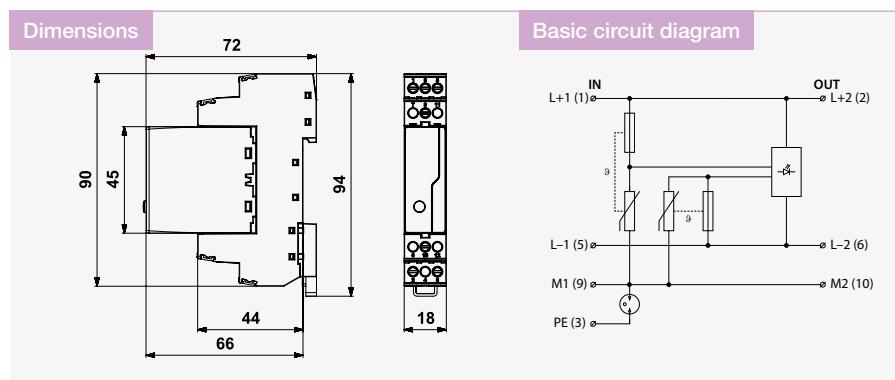


Parameter / Type	DP-012-V/1-F16	DP-024-V/1-F16	DP-048-V/1-F16
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2	ST 2	ST 2
Nominal voltage U_n	12 V AC	24 V AC	48 V AC
Maximum operating voltage U_c	20 V AC / 20 V DC	34 V AC / 34 V DC	60 V AC / 60 V DC
Nominal load current I_L	16 A	16 A	16 A
C2 nominal discharge current (8/20 μ s) per core	I_n 2 kA	2 kA	2 kA
C2 voltage protection level mode core-core at I_n	U_p 180 V	230 V	370 V
C2 voltage protection level mode core-PE at I_n	U_p 750 V	750 V	750 V
C2 voltage protection level mode core-PE at I_n	750 V	750 V	750 V
Test voltage L+ - L-	4 kV	4 kV	4 kV
Test voltage L+(L-)-PE	4 kV	4 kV	4 kV
Test voltage M-PE	4 kV	4 kV	4 kV
Voltage protection level L+ - L-	0,18 kV	0,23 kV	0,37 kV
Voltage protection level L+(L-)-PE	0,75 kV	0,75 kV	0,75 kV
Voltage protection level M-PE	0,75 kV	0,75 kV	0,75 kV
Maximum overcurrent protection	16 A gL/gG or B 16 A	16 A gL/gG or B 16 A	16 A gL/gG or B 16 A
Response time L+ - L-	25 ns	25 ns	25 ns
Response time L+(L-)-PE	100 ns	100 ns	100 ns
Response time M-PE	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Fault indication	red indicator	red indicator	red indicator
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012, EN 61643-11:2012, IEC 61643-11:2011 / T3, C2		
Ordering number	A05664	A05665	A05666

Spare module	DP-012-V/1-0	DP-024-V/1-0	DP-048-V/1-0
Ordering number	A05692	A05693	A05694

BD / BDM / BDG / BDMHF / BDGHF / DMP / DP-...-V/.-0

Replaceable modules of BD., DM., DP.

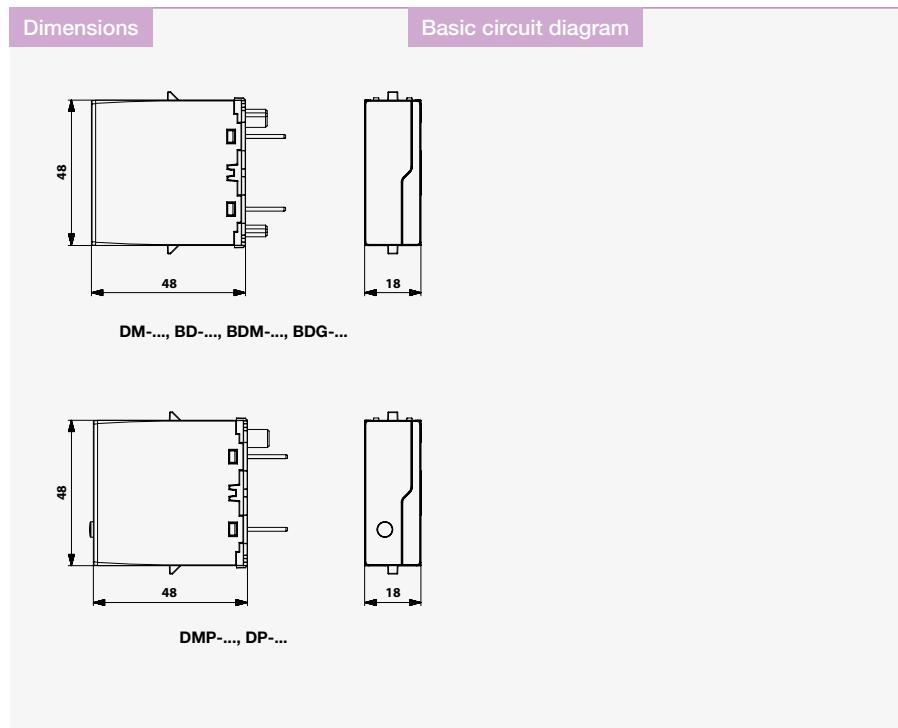

Type	Ordering number
BD-090-T-V/2-0	A05390
BD-250-T-V/2-0	A05391
BDM-006-V/1-0	A05501
BDM-012-V/1-0	A05502
BDM-024-V/1-0	A05503
BDM-048-V/1-0	A05504
BDM-060-V/1-0	A06437
BDM-230-V/1-0	A05505
BDM-006-V/2-0	A06387
BDM-012-V/2-0	A06400
BDM-024-V/2-0	A06413
BDM-048-V/2-0	A06426
BDM-060-V/2-0	A06442
BDM-230-V/2-0	A06463
BDG-006-V/1-0	A05399
BDG-012-V/1-0	A05400
BDG-024-V/1-0	A05401
BDG-048-V/1-0	A05402
BDG-060-V/1-0	A06498

Type	Ordering number
BDG-230-V/1-0	A05403
BDG-006-V/2-0	A06471
BDG-012-V/2-0	A06479
BDG-024-V/2-0	A06487
BDG-048-V/2-0	A06495
BDG-060-V/2-0	A06503
BDG-230-V/2-0	A06516
BDM-006-V/2-J-0	A06389
BDM-012-V/2-J-0	A06402
BDM-024-V/2-J-0	A06415
BDM-048-V/2-J-0	A06428
BDM-006-V/4-J-0	A06395
BDM-012-V/4-J-0	A06408
BDM-024-V/4-J-0	A06421
BDM-048-V/4-J-0	A06434
BDG-006-V/1-4-0	A06466
BDG-012-V/1-4-0	A06474
BDG-024-V/1-4-0	A06482
BDG-048-V/1-4-0	A06490

Type	Ordering number
BDMHF-006-V/1-0	A06543
BDMHF-024-V/1-0	A06549
BDMHF-006-V/1-4-0	A06544
BDMHF-024-V/1-4-0	A06550
BDGHF-006-V/1-0	A06519
BDGHF-012-V/1-0	A06525
BDGHF-024-V/1-0	A06531
BDGHF-230-V/1-0	A06537
BDGHF-006-V/2-0	A06522
BDGHF-012-V/2-0	A06528
BDGHF-024-V/2-0	A06534
BDGHF-230-V/2-0	A06540
DMG-024-V/1-4-0-DIF	A06282
DMP-012-V/1-0	A05814
DMP-024-V/1-0	A05815
DMP-012-V/1-J-0	A05816
DMP-024-V/1-J-0	A05817
DP-012-V/1-0	A05692
DP-024-V/1-0	A05693
DP-048-V/1-0	A05694

SPDs for data / signalling / telecommunication networks

Compact devices




- SPDs with coarse and fine protection
- For 1 up to 4-core lines
- Multiple core lines save the space

- Line BD – lightning current arresters
- Line DM – for 2/3/4-core communication lines
- Line DMS – with current limiting
- Line DP – for extra-low voltage supply
- Line DPF – with integrated RFi filter

Overview of SPDs for data / signalling / telecommunication networks


Compact devices

BD-...-T

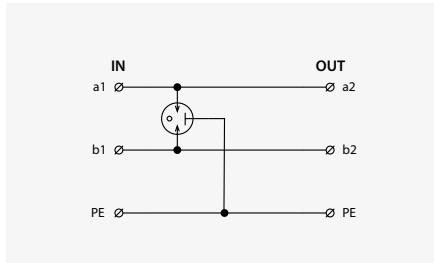


2 core line incoming from LPZ 0 to structure.
See page: 133

DM-...

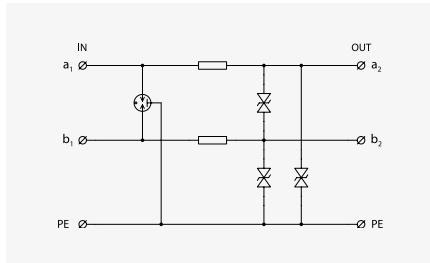


2-3 cores line incoming from LPZ 0 to structure with one-pole connected with ground.
See page: 134–135

DM- .../1 3R(L) DJ

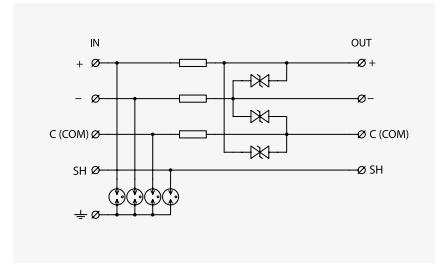


3 core floating line with shielding.
See page: 136–137

DM- .../1 4R DJ

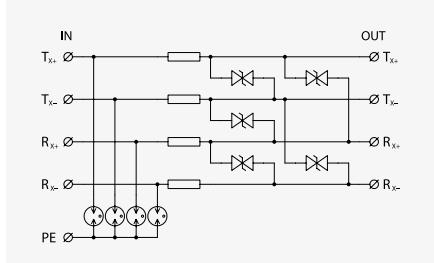


4 core floating line.
See page: 138

DMS-...-T

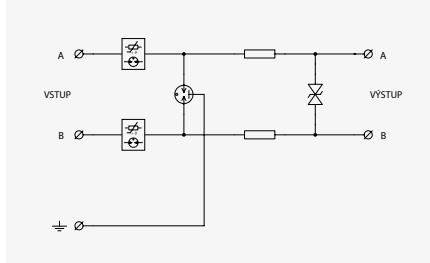


2 core line with current limiting function.
See page: 139

DP-...

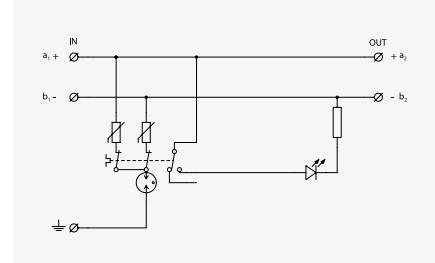

Power supply 12, 24, 48 V up to 16 A.
See page: 141

DPF-...-DC-16(-S)

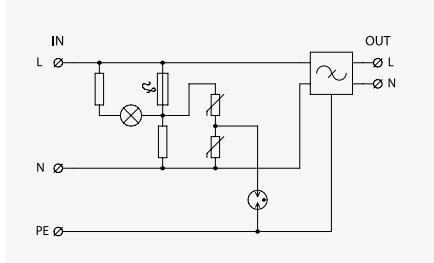


Power supply 24 V up to 6 A with integrated RF filter.
See page: 142–143

BD-...-T

Lightning current arresters, compact ST1 compact device

- lightning current arrester of 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- mainly for protection of telecommunication lines against surge voltage

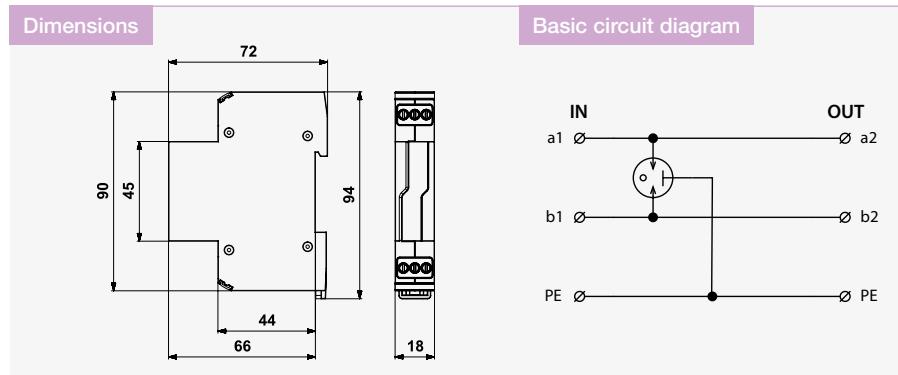

Parameter / Type	BD-090-T	BD-250-T
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 1	ST 1
Maximum operating voltage	U_c 50 V AC / 70 V DC	128 V AC / 180 V DC
Nominal load current	I_L 1,6 A	1,6 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	20 kA
D1 impulse discharge current (10/350 μ s) core-core	I_{imp} 2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	5 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 550 V	550 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 550 V	550 V
Response time core-core	t_a 100 ns	100 ns
Response time core-PE	t_a 100 ns	100 ns
Threshold frequency core-core	f 120 MHz	120 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2	
Ordering number	A05821	A05822

DM-.../1-R-DJ


NEW

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (R – resistance)

- coarse and fine surge protection for 2-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security

and fire detection systems, etc.
(mainly for RS-485 interfaces) against
impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

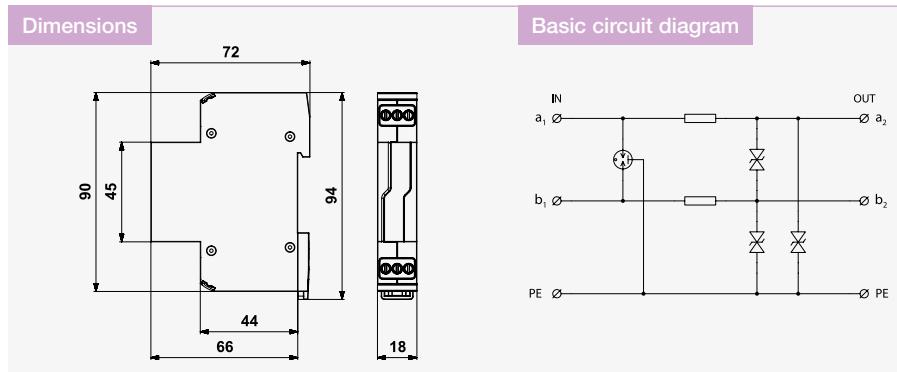

Parameter/Type	DM-006/1-R-DJ	DM-012/1-R-DJ	DM-024/1-R-DJ	DM-048/1-R-DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	35,6 V AC / 50,2 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 voltage protection level mode core-core at I_n	25 V	35 V	50 V	70 V
C2 voltage protection level mode core-PE at I_n	25 V	35 V	75 V	95 V
C3 voltage protection level mode core-core at 1 kV/ μ s	15 V	25 V	50 V	70 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	15 V	25 V	50 V	70 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time core-PE t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	1 Ω	1 Ω	1 Ω	1 Ω
Treshold frequency core-core f	1 MHz	2 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (max)	0,14 mm ² / 6 mm ²			
Cross-section of connected conductors stranded (max)	0,14 mm ² / 6 mm ²			
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C			
Mounting	DIN rail 35 mm			
According to standard	EN 61643-21+A1,A2 / B2, C1, C2, C3			
Ordering number	A06726	A06727	A06728	A06729


DM-.../1-L2-DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (L – inductance)

- coarse and fine surge protection for 2-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security

and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

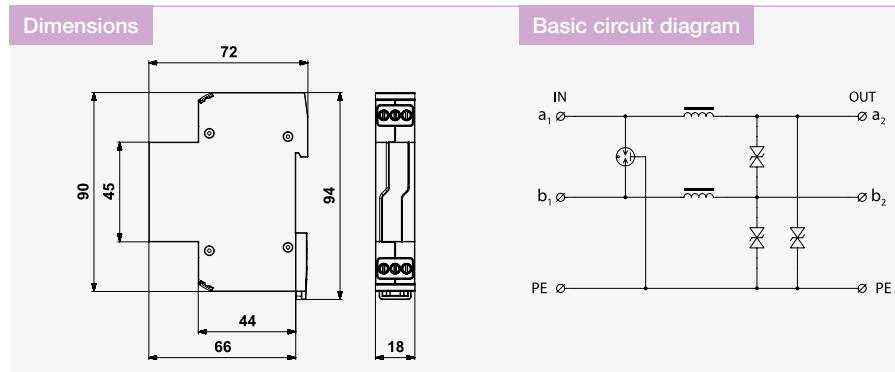

Parameter / Type	DM-012/1-L2-DJ	DM-024/1-L2-DJ	DM-048/1-L2-DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U _n	12 V DC	24 V DC
Maximum operating voltage	U _c	11 V AC / 16 V DC	25 V AC / 36 V DC
Nominal load current	I _L	2 A	2 A
C2 nominal discharge current (8/20 µs) per core	I _n	10 kA	10 kA
C2 voltage protection level mode core-core at I _n	U _p	35 V	75 V
C2 voltage protection level mode core-PE at I _n	U _p	35 V	75 V
C3 voltage protection level mode core-core at 1 kV/µs	U _p	25 V	50 V
C3 voltage protection level mode core-PE at 1 kV/µs	U _p	25 V	50 V
Response time core-core	t _a	1 ns	1 ns
Response time core-PE	t _a	1 ns	1 ns
Serial inductance per core	L	100 mH	100 mH
Threshold frequency core-core	f	150 kHz	150 kHz
Cross-section of connected conductors solid (max)		0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (max)		0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Degree of protection		IP 20	IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C	-40 °C / 80 °C
Mounting		DIN rail 35 mm	DIN rail 35 mm
According to standard		EN 61643-21+A1,A2 / B2, C1, C2, C3	
Ordering number	A06731	A06732	A06733


DM-.../1 3R DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (R – resistance)

- coarse and fine surge protection for 3-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc.

(mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

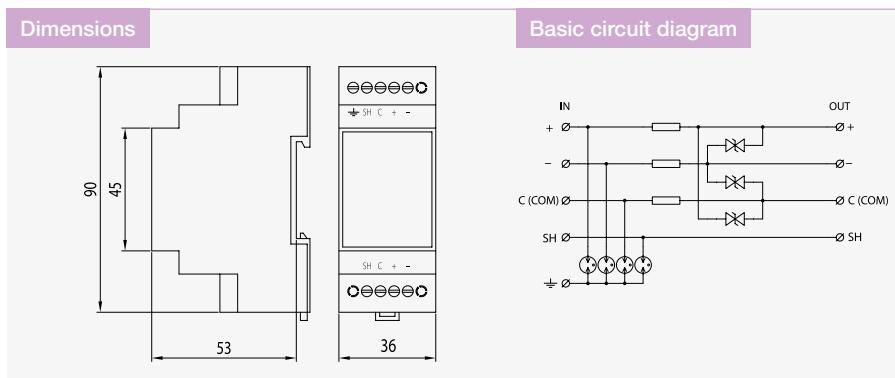

Parameter / Type	DM-006/1 3R DJ	DM-012/1 3R DJ	DM-024/1 3R DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U_n 6 V DC	U_n 12 V DC	U_n 24 V DC
Maximum operating voltage	U_c 5,7 V AC / 8,1 V DC	U_c 10,2 V AC / 14,5 V DC	U_c 20,6 V AC / 29,1 V DC
Nominal load current	I_L 0,06 A	I_L 0,06 A	I_L 0,06 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 voltage protection level mode core-core at I_n	U_p 25 V	U_p 35 V	U_p 50 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	U_p 350 V	U_p 350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	U_p 20 V	U_p 40 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 650 V	U_p 650 V	U_p 650 V
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time core-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns
Serial resistance per core	R 6,8 Ω	R 6,8 Ω	R 6,8 Ω
Treshold frequency core-core	f 1 MHz	f 1,7 MHz	f 3,4 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A01350	A01349	A01234


DM-.../1 3L DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (L – inductance)

- coarse and fine surge protection for 3-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc.

(mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

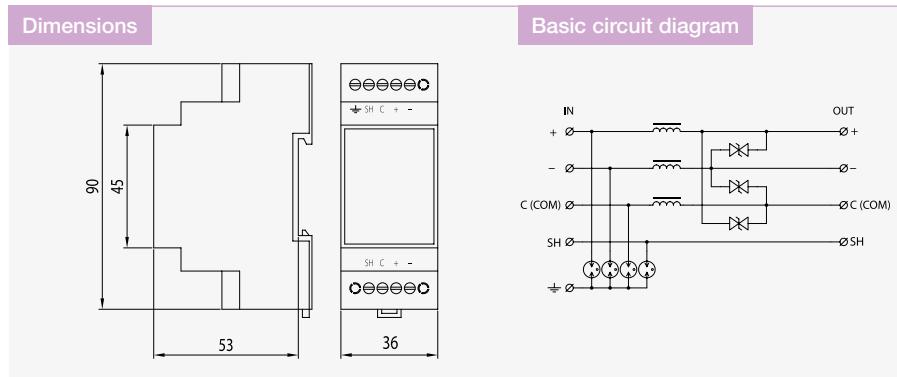


Parameter/Type	DM-006/1 3L DJ	DM-012/1 3L DJ	DM-024/1 3L DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U_n 6 V DC	U_n 12 V DC	U_n 24 V DC
Maximum operating voltage	U_c 5,7 V AC / 8,1 V DC	U_c 10,2 V AC / 14,5 V DC	U_c 20,6 V AC / 29,1 V DC
Nominal load current	I_L 0,37 A	I_L 0,37 A	I_L 0,37 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 voltage protection level mode core-core at I_n	U_p 25 V	U_p 35 V	U_p 50 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	U_p 350 V	U_p 350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	U_p 20 V	U_p 40 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 650 V	U_p 650 V	U_p 650 V
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time core-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns
Serial inductance per core	L 100 μ H	L 100 μ H	L 100 μ H
Threshold frequency core-core	f 0,16 MHz	f 0,16 MHz	f 0,16 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A01402	A02094	A01519

DM-.../1 4R DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (R – resistance)

- coarse and fine surge protection for 4-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc.

- (mainly for RS-485 interfaces) against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

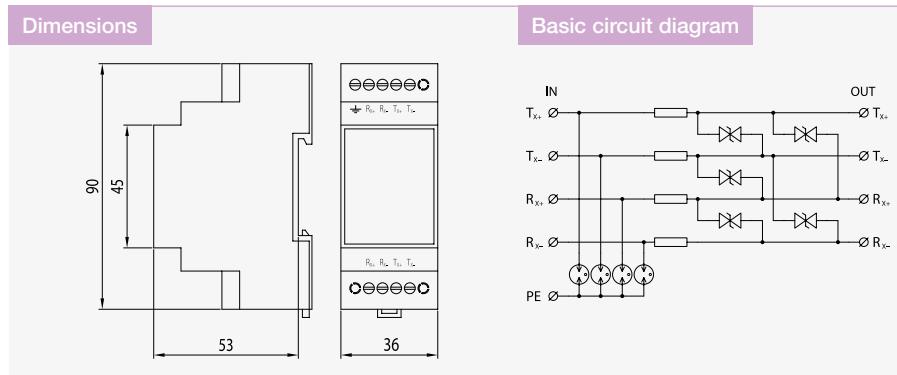

Parameter / Type	DM-006/1 4R DJ	DM-012/1 4R DJ	DM-024/1 4R DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U_n 6 V DC	U_n 12 V DC	U_n 24 V DC
Maximum operating voltage	U_c 5,7 V AC / 8,1 V DC	U_c 10,2 V AC / 14,5 V DC	U_c 20,6 V AC / 29,1 V DC
Nominal load current	I_L 0,06 A	I_L 0,06 A	I_L 0,06 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 voltage protection level mode core-core at I_n	U_p 25 V	U_p 35 V	U_p 50 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	U_p 350 V	U_p 350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	U_p 20 V	U_p 40 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 650 V	U_p 650 V	U_p 650 V
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time core-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns
Serial resistance per core	R 6,8 Ω	R 6,8 Ω	R 6,8 Ω
Treshold frequency core-core	f 1 MHz	f 1,7 MHz	f 3,4 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A01675	A01689	A01357


DMS-...-T

Special surge protection with limiting current coupling impedance (resistance)

- special two-stage surge protection of 2-core signalling line with current limiting
- installation close to protected equipment
- for protection of communication interfaces, mainly the measuring loops, of I&C, electronic security and fire

detection systems, etc. against surge voltage where are long parallel lines with power network

- coarse and fine surge protection in differential mode (core – core) and coarse surge protection in common mode (core – PE)


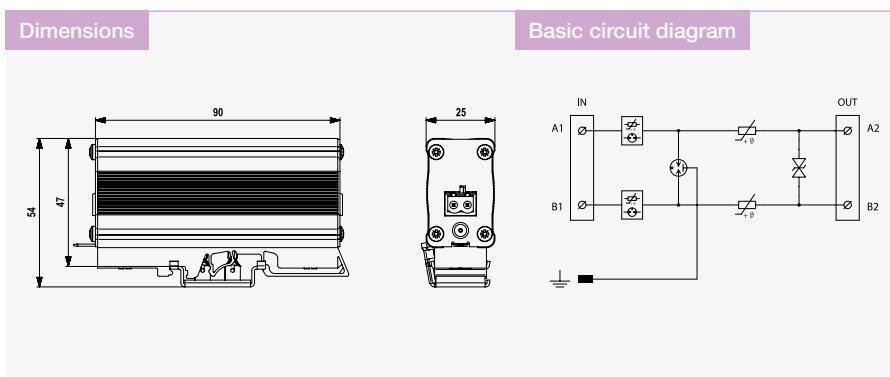


Parameter / Type	DMS-024-T	DMS-048-T
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage U_n	24 V DC	48 V DC
Maximum operating voltage U_c	25 V AC / 33 V DC	39 V AC / 56 V DC
Nominal load current I_L	0,06 A	0,06 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA
C2 voltage protection level mode core-core at I_n U_p	75 V	110 V
C2 voltage protection level mode core-PE at I_n U_p	500 V	500 V
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Serial resistance per core R	13 Ω	13 Ω
Threshold frequency core-core f	1,1 MHz	2,0 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2	
Ordering number	A06596	A06597

DL-RS DD9

Surge protection for RS interfaces (with DSUB connectors)
DSUB 9 connectors

- fine protection
- for protection of serial ports of computers and control systems of I&C, electronic security and fire detection systems, etc. against impact of surge voltage

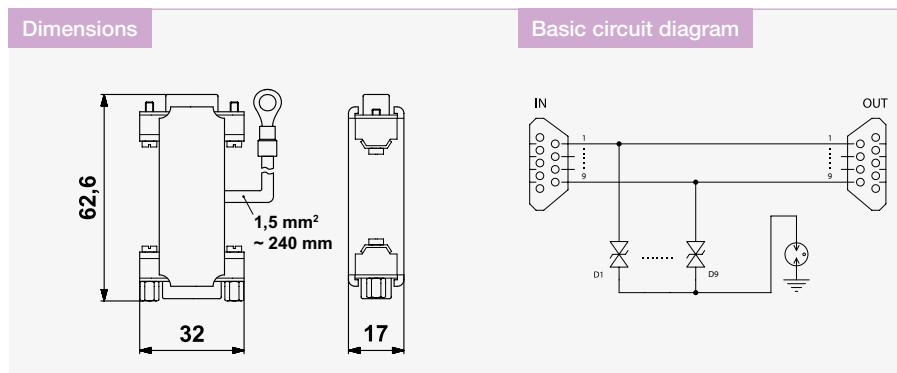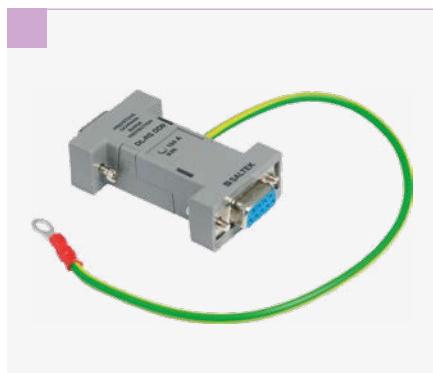


Parameter / Type	DL-RS DD9
Location of SPD	ST 3
Maximum operating voltage	U_c 12,7 V AC / 18 V DC
C1 nominal discharge current (8/20 μ s) per core	I_n 150 A
C1 voltage protection level mode core-core at I_n	U_p 65 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 50 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 980 V
Response time core-core	t_a 1 ns
Response time core-PE	t_a 100 ns
Threshold frequency core-core	f 55 MHz
Connection (input - output)	female DSUB 9 - male DSUB 9
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C1,C3
Ordering number	A00968

DP-...-25

Surge protection for ELV power supply networks, compact version
visual fault signalling

- surge protection for all types of LV electric and electronic equipments against surge voltage
- installation to ELV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

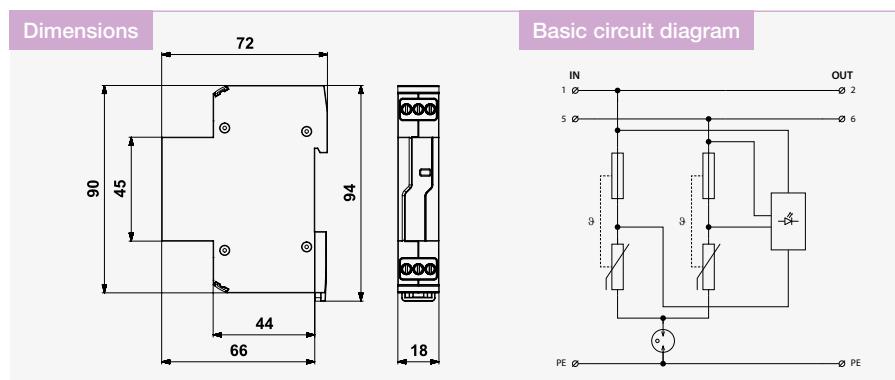


Parameter / Type	DP-012-25	DP-024-25	DP-048-25
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2	ST 2	ST 2
Nominal voltage U_n	12 V AC	24 V AC	48 V AC
Maximum operating voltage U_c	20 V AC / 20 V DC	36 V AC / 36 V DC	60 V AC / 60 V DC
Nominal load current I_L	25 A	25 A	25 A
C2 nominal discharge current (8/20 μ s) per core	2 kA	2 kA	2 kA
C2 voltage protection level mode core-core at I_n	180 V	230 V	380 V
C2 voltage protection level mode core-PE at I_n	550 V	550 V	550 V
Test voltage L+ - L-	4 kV	4 kV	4 kV
Test voltage L+(L-) - PE	4 kV	4 kV	4 kV
Voltage protection level L+ - L-	0,18 kV	0,23 kV	0,38 kV
Maximum overcurrent protection	25 A gL/gG or C 25 A	25 A gL/gG or C 25 A	25 A gL/gG or C 25 A
Response time L+ - L-	25 ns	25 ns	25 ns
Response time L+(L-) - PE	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Fault indication	red indicator	red indicator	red indicator
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A06096	A06097	A06098

DPF-...DC-16

Surge protection for ELV power supply networks, with RFi filter
visual fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of control systems, electronic security and fire systems against impact of transient overvoltage and RF disturbance
- for AC or DC power supply

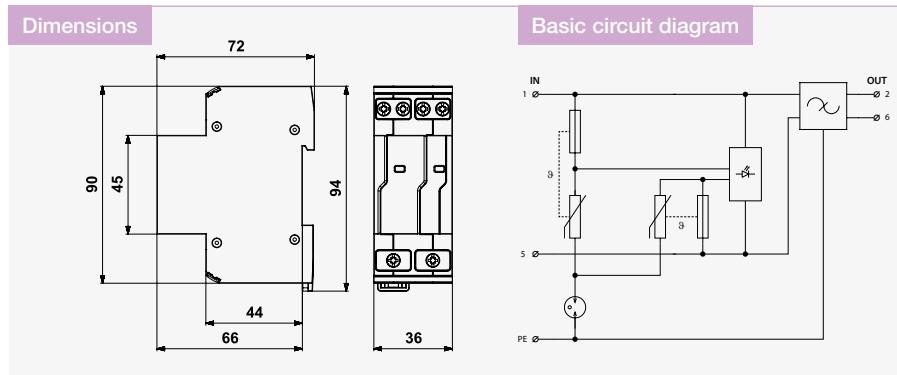


Parameter / Type	DPF-012DC-16	DPF-024DC-16	DPF-048DC-16
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Nominal voltage U_n	12 V AC	24 V AC	48 V AC
Maximum operating voltage U_c	20 V AC / 20 V DC	34 V AC / 34 V DC	60 V AC / 60 V DC
Nominal load current I_L	16 A	16 A	16 A
Test voltage L+ - L-	4 kV	4 kV	4 kV
Test voltage L+(L-) - PE	4 kV	4 kV	4 kV
Voltage protection level L+ - L-	0,25 kV	0,29 kV	0,42 kV
Voltage protection level L+(L-) - PE	0,5 kV	0,5 kV	0,5 kV
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L+ - L-	25 ns	25 ns	25 ns
Response time L+(L-) - PE	100 ns	100 ns	100 ns
RFi filter	yes	yes	yes
Filter attenuation at 1MHz (50 Ω/50 Ω) symmetrical	45 dB	45 dB	45 dB
Filter attenuation at 1MHz (50 Ω/50 Ω) unsymmetrical	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Fault indication	red indicator	red indicator	red indicator
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A06635	A06636	A06637

DPF-...DC-16-S


Surge protection for ELV power supply networks, with RFi filter
visual and remote fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of control systems, electronic security and fire systems against impact of transient overvoltage and RF disturbance
- for AC or DC power supply

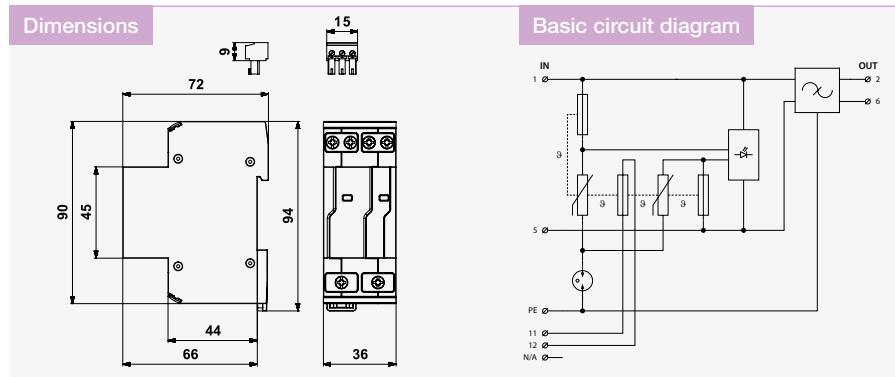


Parameter / Type	DPF-012DC-16-S	DPF-024DC-16-S	DPF-048DC-16-S
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Nominal voltage	U_n 12 V AC	24 V AC	48 V AC
Maximum operating voltage	U_c 20 V AC / 20 V DC	34 V AC / 34 V DC	60 V AC / 60 V DC
Nominal load current	I_L 16 A	16 A	16 A
Test voltage L+ - L-	4 kV	4 kV	4 kV
Test voltage L+(L-) - PE	4 kV	4 kV	4 kV
Voltage protection level L+ - L-	0,25 kV	0,29 kV	0,42 kV
Voltage protection level L+(L-) - PE	0,5 kV	0,5 kV	0,5 kV
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L+ - L-	25 ns	25 ns	25 ns
Response time L+(L-) - PE	100 ns	100 ns	100 ns
RFi filter	yes	yes	yes
Filter attenuation at 1MHz (50 Ω/50 Ω) symmetrical	45 dB	45 dB	45 dB
Filter attenuation at 1MHz (50 Ω/50 Ω) unsymmetrical	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Fault indication	red indicator	red indicator	red indicator
Remote indication	potential-free open contact	potential-free open contact	potential-free open contact
Remote indication contacts	230 V / 0,5 A AC, 24 V / 0,5 A DC	230 V / 0,5 A AC, 24 V / 0,5 A DC	230 V / 0,5 A AC, 24 V / 0,5 A DC
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A06664	A06665	A06666

Notes

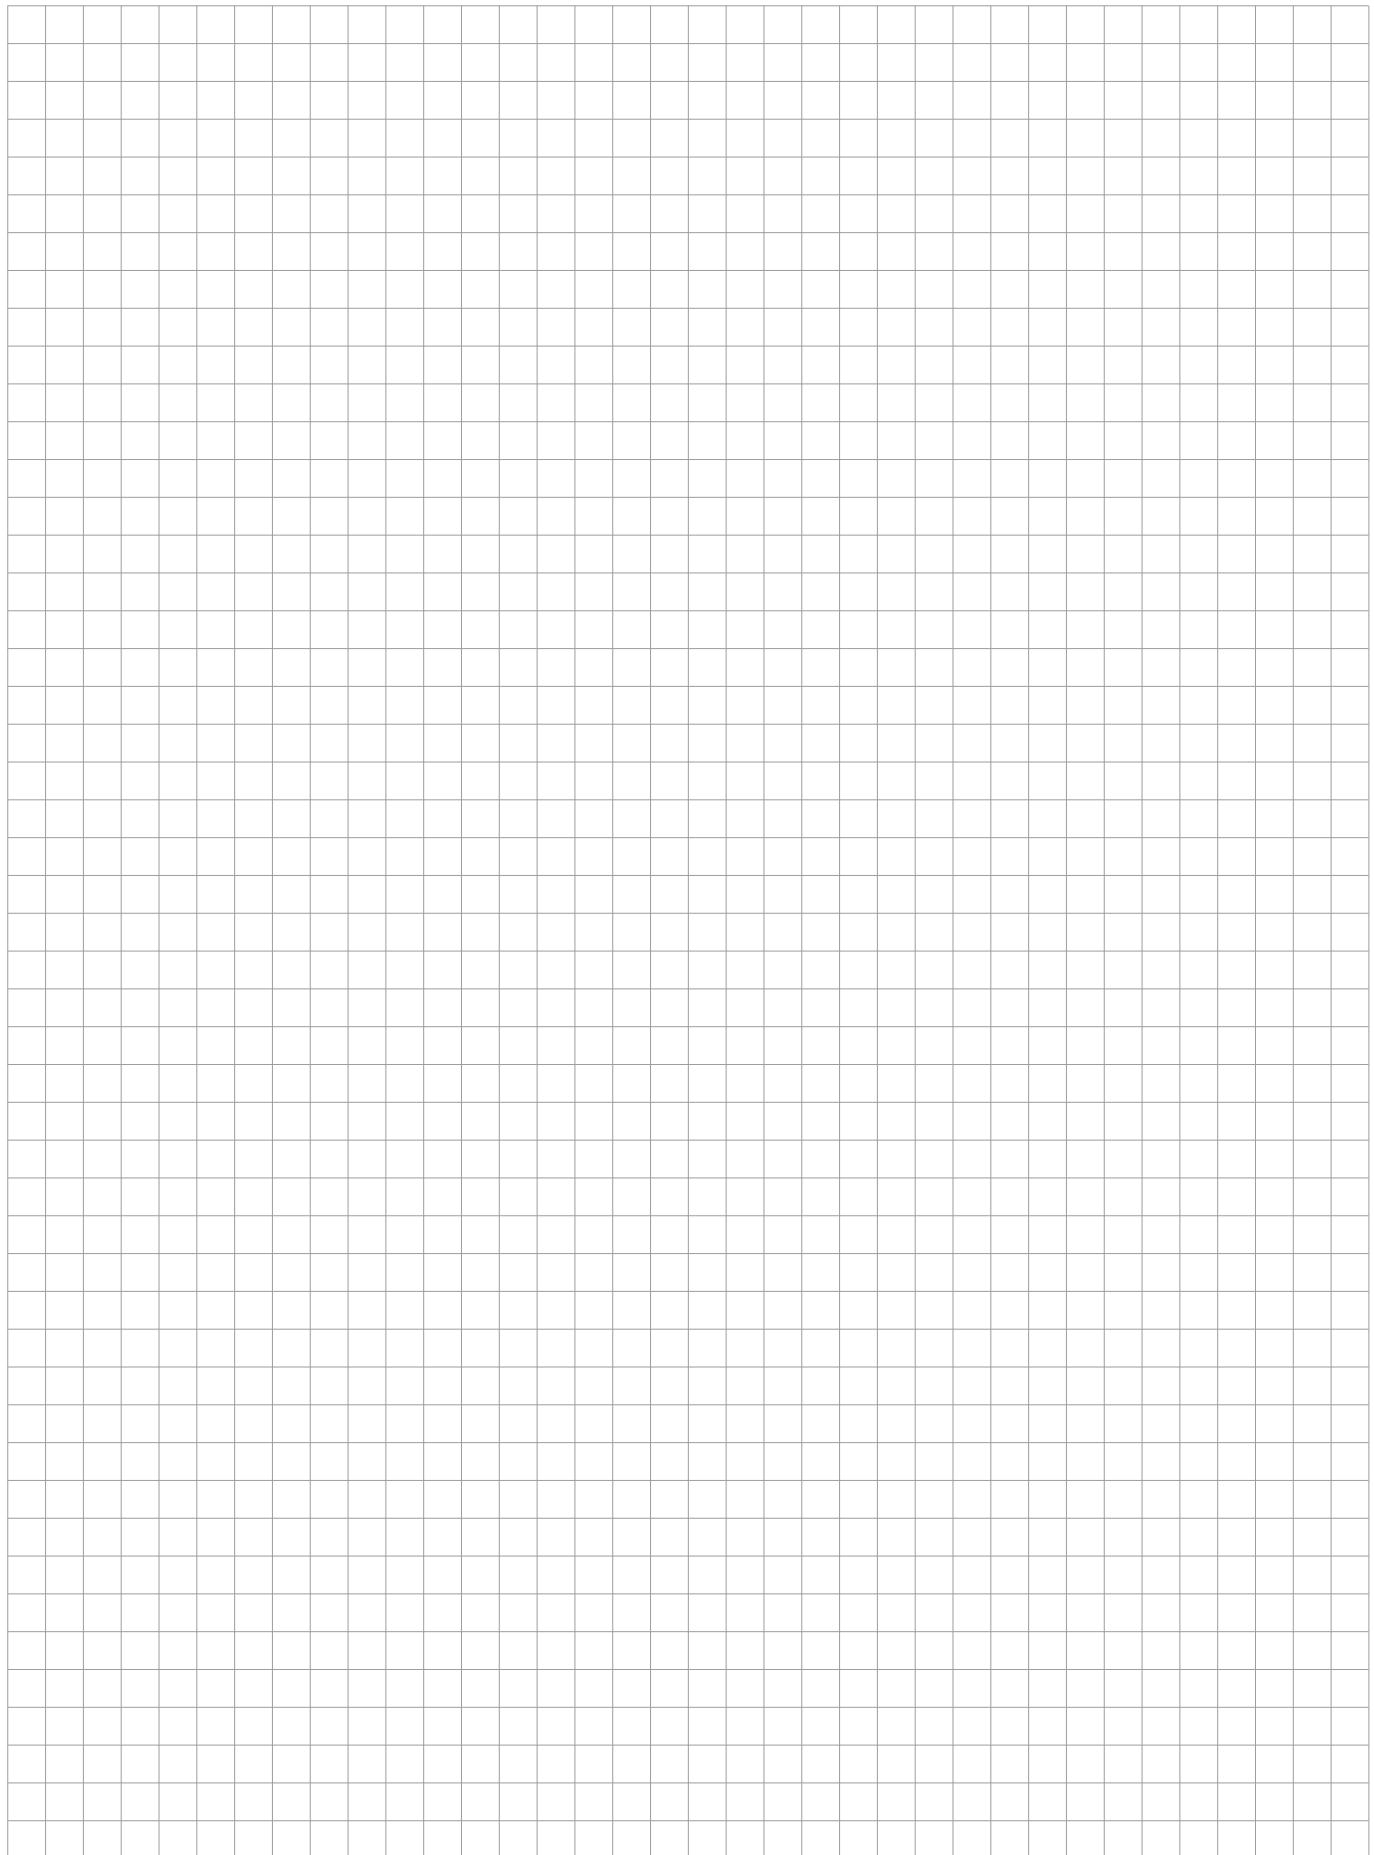A large grid of squares, approximately 20 columns by 25 rows, designed for writing notes or drawing diagrams.

SPDs for data / signalling / telecommunication networks

Terminal blocks with screw terminals

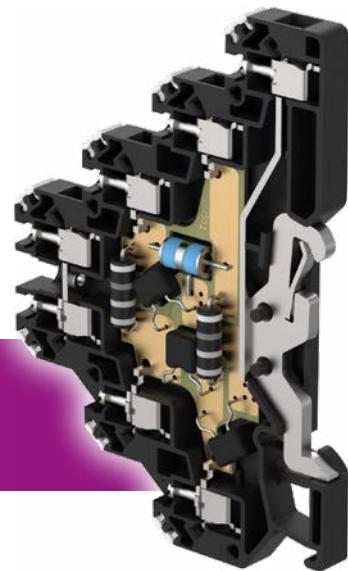


- SPDs with coarse and fine protection
- For single and two-core lines
- Multiple core lines significantly save the space
- Direct grounding via DIN rail clip

- Line DM – for 2/3/4-core communication lines
- Line DMG – with separated signal ground and protective earth
- Line DMJ – for 1-core lines with common ground
- Line DMHF – for high-speed lines
- Line DMLF – with protection against RF disturbance
- Line DS – single-stage protection

Overview of SPDs for data / signalling / telecommunication networks


Terminal blocks with screw terminals

DM-.../1-RS

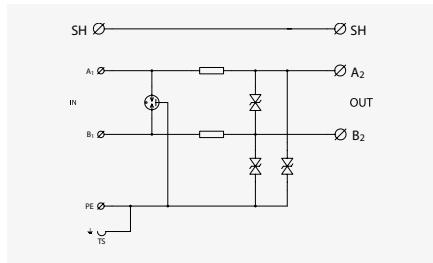


2/3-core line with one pole connected to common ground.
See page: 147

DMG-.../1-RS

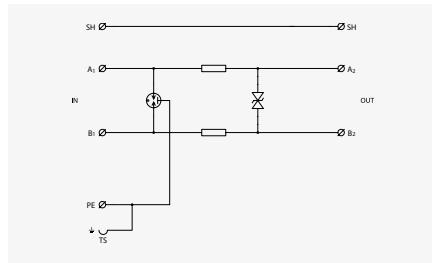


2-core floating line.
See page: 148

DMJ-.../2-RS

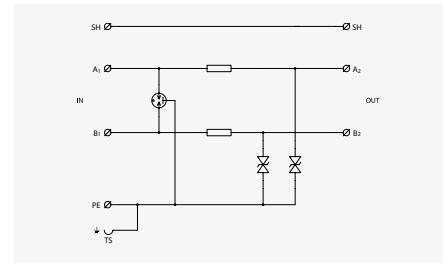


Two single-core lines with common ground.
See page: 149

DMHF-.../1-RS

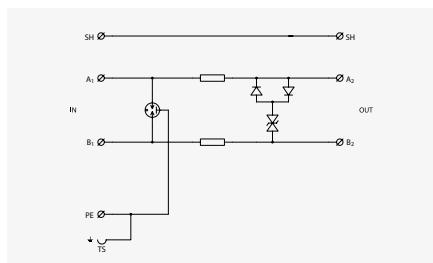


2-core high-speed floating line.
See page: 150

DMLF-.../1-RS

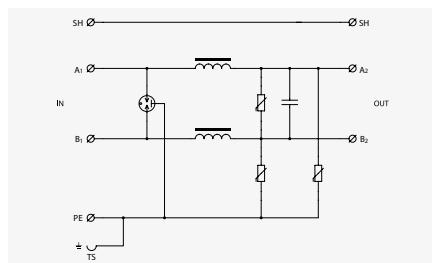


2-core low-frequency line.
See page: 151

DS-B...-RS

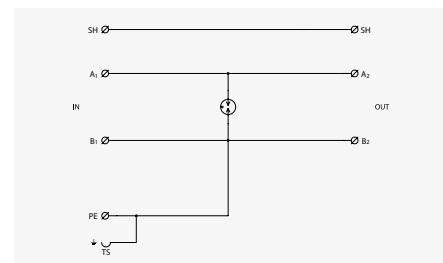


Single stage protection of 2-core line.
See page: 152

DS-D...-RS

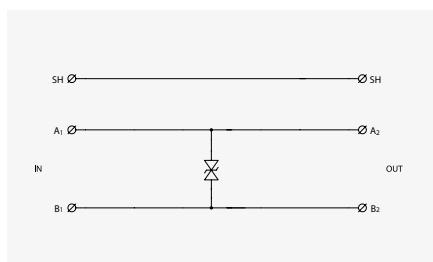

Single stage protection of 2-core line.
See page: 152

DS-V...-RS

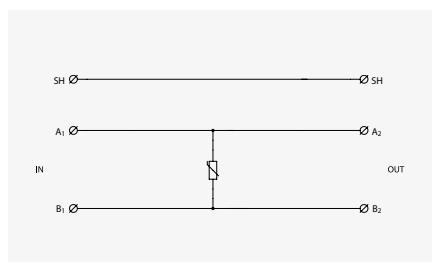


Single stage protection of 2-core line.
See page: 152

DM-.../1-RS

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screw terminals

- coarse and fine surge protection for 2-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces, mainly the RS-485 lines,

- of I&C, electronic security and fire detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

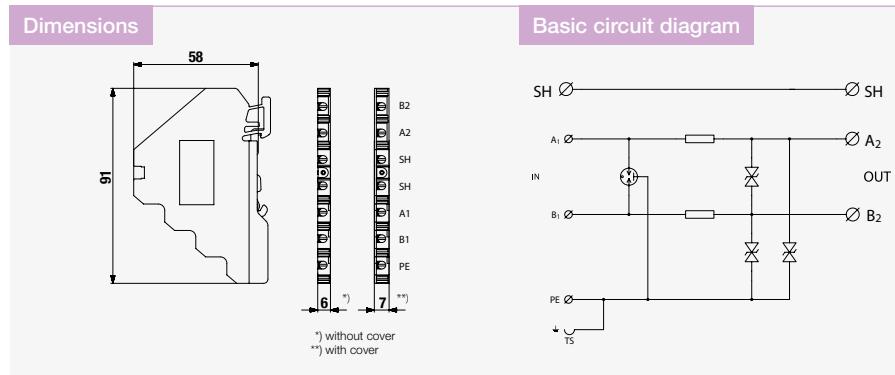

Parameter / Type	DM-006/1-RS	DM-012/1-RS	DM-024/1-RS	DM-048/1-RS	DM-060/1-RS
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core I_{imp}	0,5 kA	0,5 kA	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n U_p	18 V	28 V	50 V	80 V	100 V
C2 voltage protection level mode core-PE at I_n U_p	30 V	40 V	65 V	95 V	120 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	20 V	45 V	65 V	85 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	15 V	20 V	45 V	65 V	85 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns	1 ns
Response time core-PE t_a	1 ns	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core f	1 MHz	2 MHz	4 MHz	5 MHz	6,5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3				
Ordering number	A05140	A05141	A05142	A05143	A05129

Accessories:	Ordering number	See page
Connection bridge JRS 10P	B41175	199


DMG-.../1-RS

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screw terminals

- coarse and fine surge protection for 2-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and measuring lines of I&C, electronic security and fire detection

systems, etc. against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

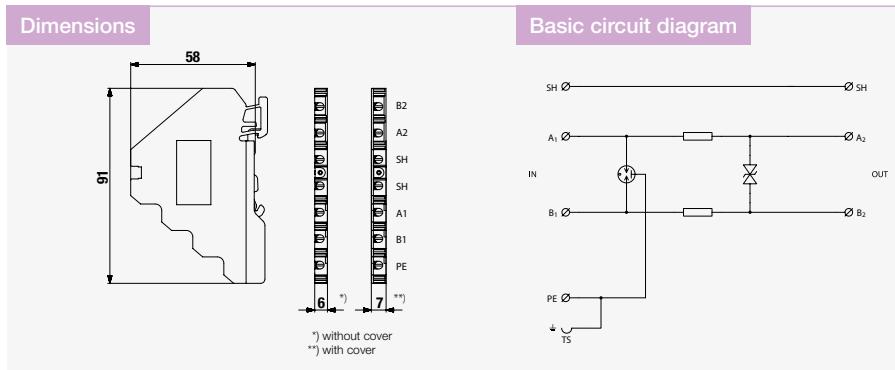

Parameter / Type	DMG-006/1-RS	DMG-012/1-RS	DMG-024/1-RS	DMG-048/1-RS	DMG-060/1-RS
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 5 kA	5 kA	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 10 kA	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	0,5 kA	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n	U_p 18 V	28 V	50 V	80 V	100 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	350 V	350 V	350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	20 V	45 V	65 V	85 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 500 V	500 V	500 V	500 V	500 V
Response time core-core	t_a 1 ns	1 ns	1 ns	1 ns	1 ns
Response time core-PE	t_a 100 ns	100 ns	100 ns	100 ns	100 ns
Serial resistance per core	R 1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core	f 1 MHz	2 MHz	4 MHz	5 MHz	6,5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3				
Ordering number	A05132	A05133	A05134	A05135	A05136


Accessories:	Ordering number	See page
Connection bridge JRS 10P	B41175	199

DMJ-.../2-RS

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screw terminals

- coarse and fine surge protection for two 1-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and control circuits of I&C,

- electronic security and fire detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in common mode (core – PE)

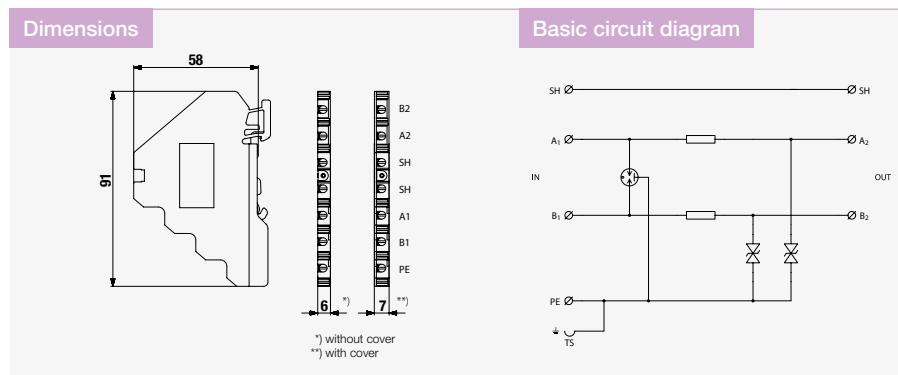

Parameter / Type	DMJ-012/2-RS	DMJ-024/2-RS	DMJ-048/2-RS	DMJ-060/2-RS
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage U_c	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core I_{imp}	0,5 kA	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-PE at I_n U_p	40 V	65 V	95 V	120 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	20 V	45 V	65 V	85 V
Response time core-PE t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω
Treshold frequency core-core f	2 MHz	4 MHz	5 MHz	6,5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3			
Ordering number	A05144	A05145	A05131	A05146


Accessories:

Connection bridge JRS 10P

Ordering number

See page

B41175



199

DMHF-.../1-RS

Surge protection for industrial communication bus (eg. PROFIBUS)
coupling impedance (resistance), screw terminals

- coarse and fine surge protection of 2-core high-speed signalling lines
- installation close to protected equipment
- for protection of communication interfaces, mainly the RS-485 lines, of I&C, electronic security and fire

- detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse surge protection in common mode (core – PE)

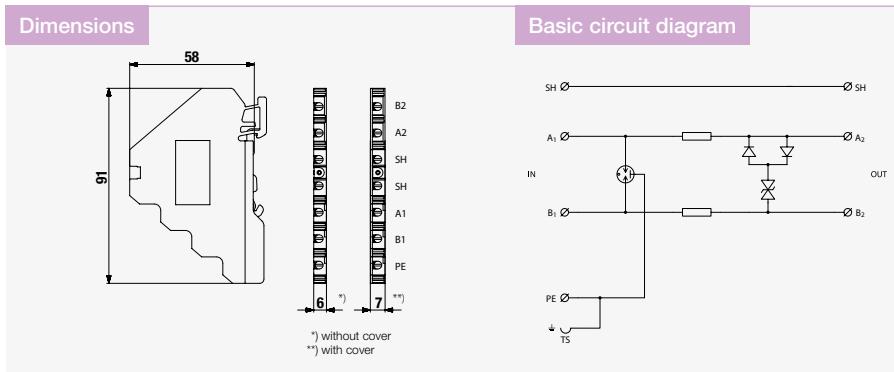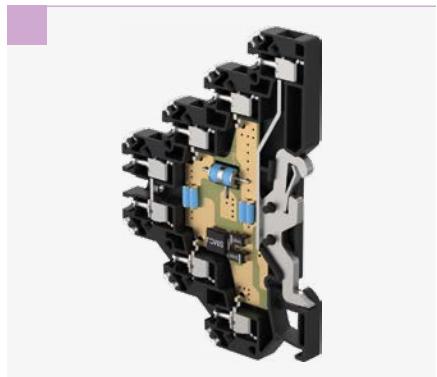

Parameter / Type	DMHF-006/1-RS	DMHF-015/1-RS
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	15 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	15 V AC / 22 V DC
Nominal load current I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n	U_p 26 V	36 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 14 V	28 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 500 V	500 V
Response time core-core	t_a 1 ns	1 ns
Response time core-PE	t_a 100 ns	100 ns
Serial resistance per core	R 1,6 Ω	1,6 Ω
Threshold frequency core-core	f 70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3	
Ordering number	A05138	A05139



Accessories:

Connection bridge JRS 10P

Ordering number

See page


B41175

199

DMLF-.../1-RS

Coarse and fine surge protection for telecommunications and signalling network with limiting Radio-frequency interference coupling impedance (inductance), screw terminals

- coarse and fine surge protection for low-frequency 2-core signalling networks
- installation close to protected equipment
- for protection of analogue measuring lines in the areas with RF disturbance
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

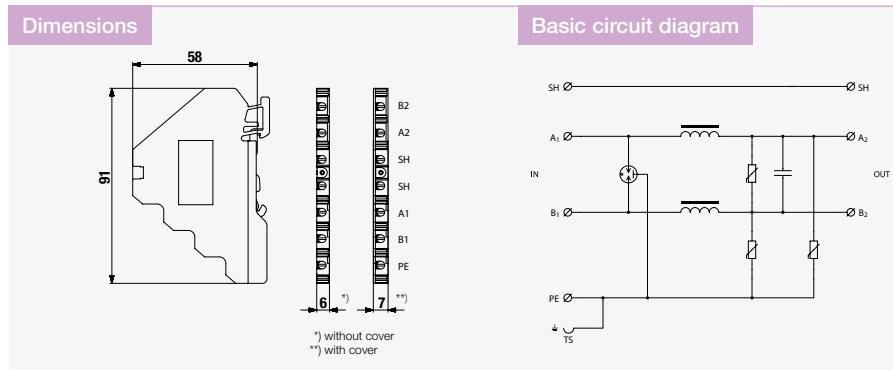

Parameter / Type	DMLF-024/1-RS
Connection (input - output)	terminals-terminals
Location of SPD	ST 2
Nominal voltage U_n	24 V DC
Maximum operating voltage U_c	31 V DC
Nominal load current I_L	0,1 A
C2 nominal discharge current (8/20 µs) per core	5 kA
C2 total discharge current (8/20 µs) cores-PE	10 kA
D1 impulse discharge current (10/350 µs) per core	0,5 kA
C2 voltage protection level mode core-core at I_n	65 V
C2 voltage protection level mode core-PE at I_n	80 V
C3 voltage protection level mode core-core at 1 kV/µs	55 V
C3 voltage protection level mode core-PE at 1 kV/µs	55 V
Response time core-core	25 ns
Response time core-PE	25 ns
Threshold frequency core-core	0,07 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm² / 4 mm²
Cross-section of connected conductors stranded (min/max)	0,14 mm² / 2,5 mm²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A05333


Accessories:

Connection bridge JRS 10P

Ordering number

See page

B41175

199


DS-...-RS

Single stage surge arrester in terminal block

B – Gas Discharge Tube, V – varistors, D – fast suppressor diodes, screw terminal

- coarse single stage surge arrester (B),
single stage surge arrester (V),
fine single stage surge protection (D)
- for protection of signalling, data and
other lines against impact of surge
voltage

- version DS-B is usable mainly for
the separation of shielding from
the protective earth

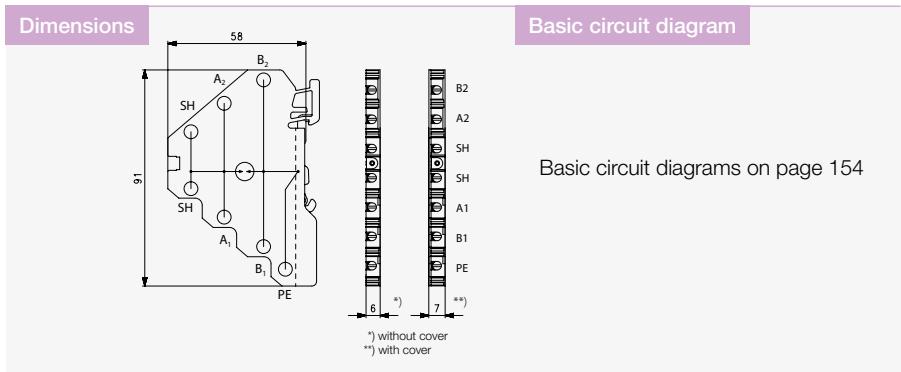

Parameter / Type	DS-B090-RS	DS-D024-RS	DS-V130-RS
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2	ST 3	ST 2
Maximum operating voltage	U_c 50 V AC / 70 V DC	20,6 V AC / 29,1 V DC	140 V AC / 180 V DC
Nominal load current	I_L 16 A	16 A	16 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	0,3 kA	6 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	-	-
C2 voltage protection level mode core-PE at I_n	U_p -	48 V	530 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 550 V	-	-
Response time core-PE	t_a 100 ns	1 ns	25 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A05148	A05153	A05151



Accessories:

Connection bridge JRS 10P

Ordering number

See page

B41175

199

SPDs for data / signalling / telecommunication networks

Terminal blocks with screwless terminals




- SPDs with coarse and fine protection
- For single and two-core lines
- Multiple core lines significantly save the space
- Screwless terminals for easy connection

- Line DM – for 2/3/4-core communication lines
- Line DMG – with separated signal ground and protective earth
- Line DMJ – for 1-core lines with common ground
- Line DMHF – for high-speed lines
- Line DMLF – with protection against RF disturbance
- Line DS – single-stage protection

Overview of SPDs for data / signalling / telecommunication networks


Terminal blocks with screwless terminals

DM-.../1-RB

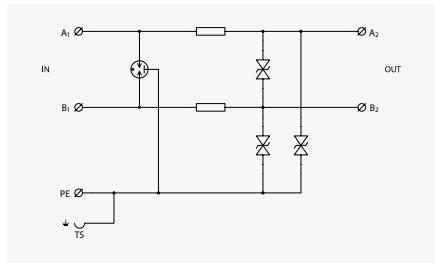


2-core line with one pole connected to common ground.
See page: 155

DMG-.../1-RB

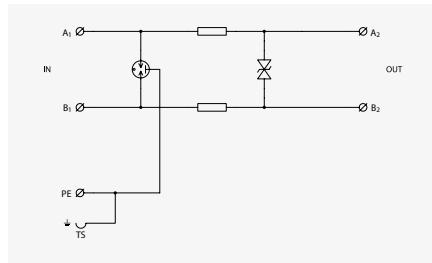


2-core floating line.
See page: 156

DMJ-.../2-RB

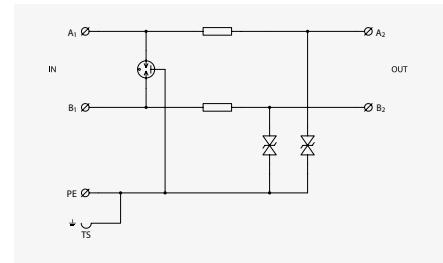


Two single-core lines with common ground.
See page: 157

DMHF-.../1-RB

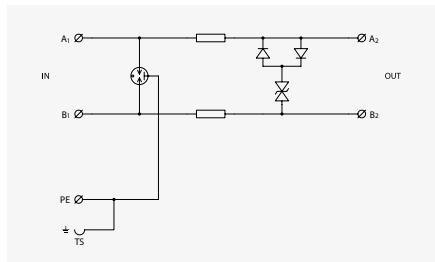


2-core high-speed floating line.
See page: 158

DMLF-024/1-RB

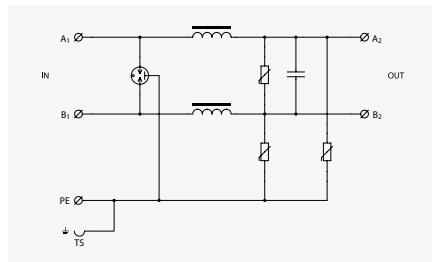

2-core low-frequency line.
See page: 159

DS-B090-RB

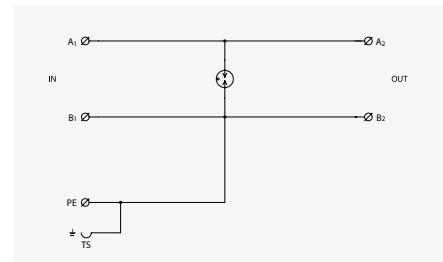


Single stage protection of 2-core line.
See page: 160

DM-.../1-RB

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screwless terminals

- coarse and fine surge protection for 2-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces, mainly the RS-485 lines,

- of I&C, electronic security and fire detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

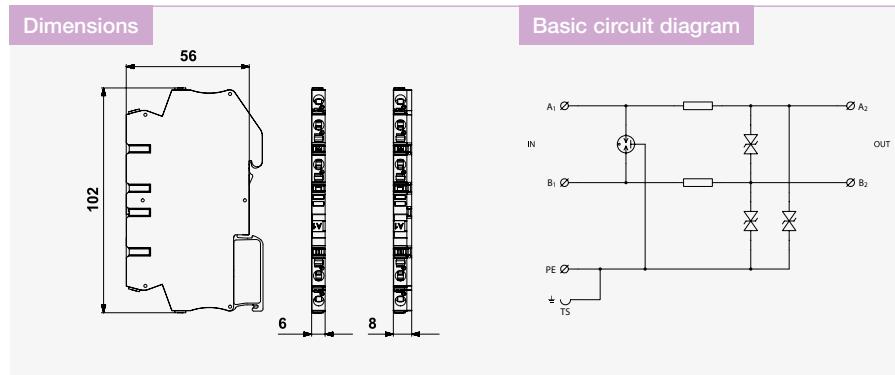

Parameter / Type	DM-006/1-RB	DM-012/1-RB	DM-024/1-RB	DM-048/1-RB
Connection (input - output)	screwless terminals	screwless terminals	screwless terminals	screwless terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core I_{imp}	0,5 kA	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n U_p	18 V	28 V	50 V	80 V
C2 voltage protection level mode core-PE at I_n U_p	30 V	40 V	65 V	95 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	20 V	45 V	65 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	15 V	20 V	45 V	65 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time core-PE t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core f	1 MHz	2 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3			
Ordering number	A06057	A06058	A06059	A06060


Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page

by type

199


DMG-.../1-RB

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screwless terminals

- coarse and fine surge protection for 2-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and measuring lines of I&C, electronic security and fire detection

systems, etc. against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

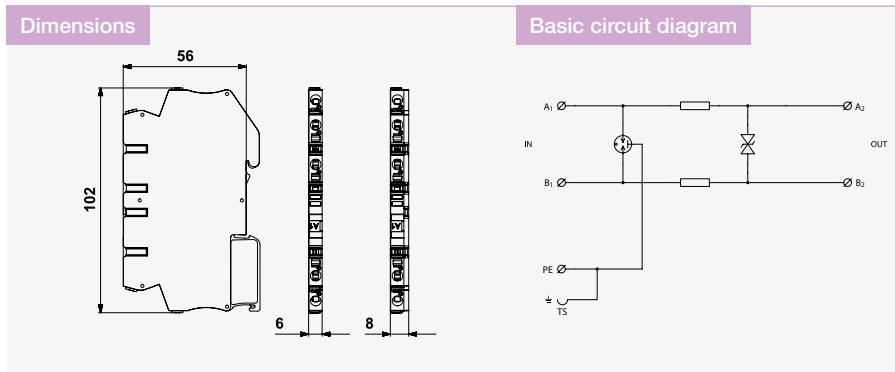

Parameter/Type	DMG-006/1-RB	DMG-024/1-RB	DMG-048/1-RB
Connection (input - output)	screwless terminals	screwless terminals	screwless terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n	U_p 18 V	50 V	80 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	45 V	65 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 500 V	500 V	500 V
Response time core-core	t_a 1 ns	1 ns	1 ns
Response time core-PE	t_a 100 ns	100 ns	100 ns
Serial resistance per core	R 1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core	f 1 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A06061	A06062	A06063



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page

by type

199


DMJ-.../2-RB

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screwless terminals

- coarse and fine surge protection for two 1-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and control circuits of I&C,

electronic security and fire detection systems, etc. against impact of surge voltage

- coarse and fine surge protection in common mode (core – PE)

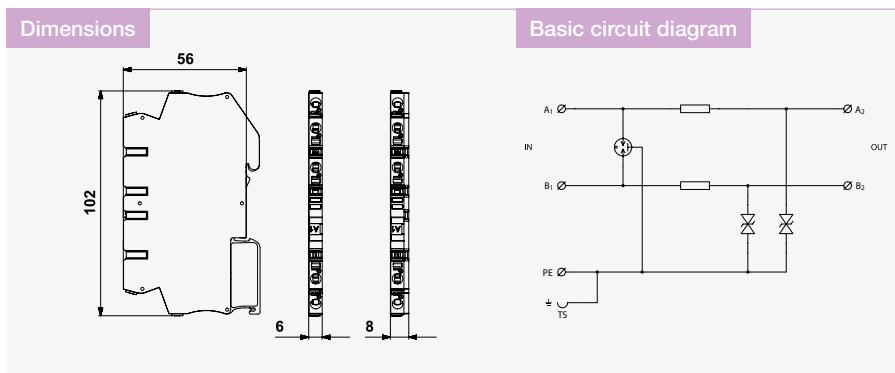

Parameter / Type	DMJ-012/2-RB	DMJ-024/2-RB	DMJ-048/2-RB	
Connection (input - output)	screwless terminals	screwless terminals	screwless terminals	
Location of SPD	ST 2+3	ST 2+3	ST 2+3	
Nominal voltage	U_n	12 V DC	24 V DC	48 V DC
Maximum operating voltage	U_c	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current	I_L	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total}	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp}	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-PE at I_n	U_p	40 V	65 V	95 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p	20 V	45 V	65 V
Response time core-PE	t_a	1 ns	1 ns	1 ns
Serial resistance per core	R	1,6 Ω	1,6 Ω	1,6 Ω
Treshold frequency core-core	f	2 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (min/max)		0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)		0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²
Degree of protection		IP 20	IP 20	IP 20
Range of operating temperatures (min/max)		-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting		DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A06065	A06066	A06067	



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page

by type


199

DMHF-0../1-RB

Surge protection for industrial communication bus (eg. PROFIBUS)
coupling impedance (resistance), screwless terminals

- coarse and fine surge protection of 2-core high-speed signalling lines
- installation close to protected equipment
- for protection of communication interfaces, mainly the RS-485 lines, of I&C, electronic security and fire

- detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse surge protection in common mode (core – PE)

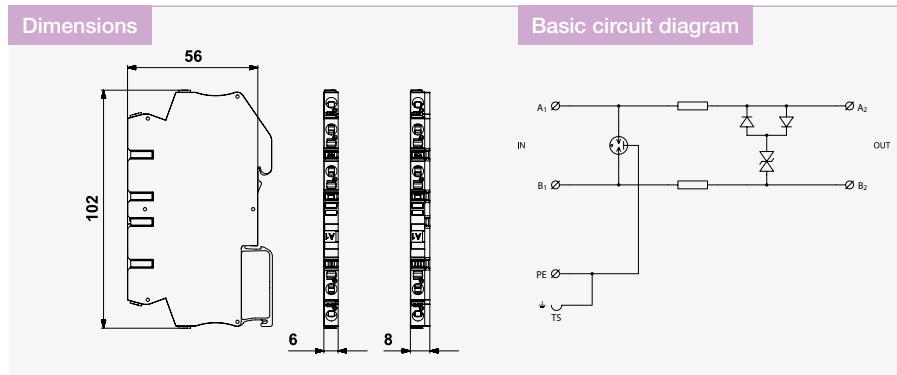

Parameter / Type	DMHF-006/1-RB	DMHF-015/1-RB
Connection (input - output)	screwless terminals	screwless terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	15 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	6 V AC / 8,5 V DC
Nominal load current I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core I_{imp}	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n U_p	26 V	36 V
C2 voltage protection level mode core-PE at I_n U_p	350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	14 V	28 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	500 V	500 V
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Serial resistance per core R	1,6 Ω	1,6 Ω
Threshold frequency core-core f	70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3	
Ordering number	A06064	A06290



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page


by type

199

DMLF-024/1-RB

Coarse and fine surge protection for telecommunications and signalling network with limiting Radio-frequency interference coupling impedance (inductance), screwless terminals

- coarse and fine surge protection for low-frequency 2-core signalling networks
- installation close to protected equipment
- for protection of analogue measuring lines in the areas with RF disturbance
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

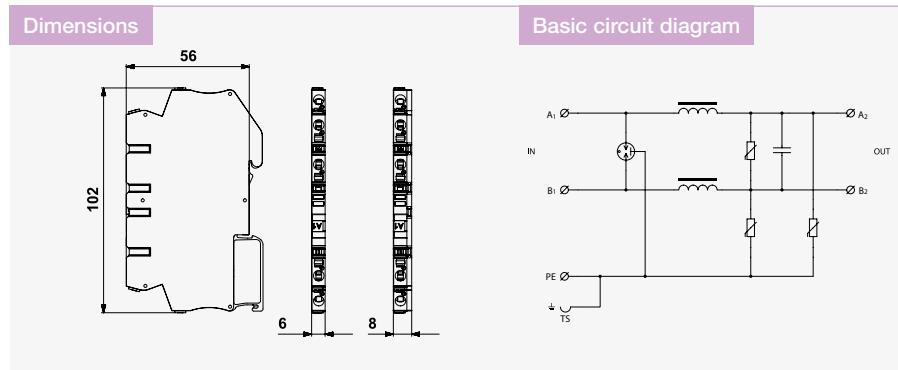

Parameter / Type	DMLF-024/1-RB
Connection (input - output)	screwless terminals
Location of SPD	ST 2
Nominal voltage U_n	24 V DC
Maximum operating voltage U_c	31 V DC
Nominal load current I_L	0,1 A
C2 nominal discharge current (8/20 μ s) per core	5 kA
C2 total discharge current (8/20 μ s) cores-PE	10 kA
D1 impulse discharge current (10/350 μ s) per core	0,5 kA
C2 voltage protection level mode core-core at I_n	65 V
C2 voltage protection level mode core-PE at I_n	80 V
C3 voltage protection level mode core-core at 1 kV/ μ s	55 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	55 V
Response time core-core	25 ns
Response time core-PE	25 ns
Threshold frequency core-core	0,07 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A06069


Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page

by type


199

DS-B090-RB

Single stage surge protection

B – Gas Discharge Tube, screwless terminal

- coarse single stage surge arrester
- for protection of signalling, data and other lines against impact of surge voltage
- usable mainly for the separation of shielding from the protective earth

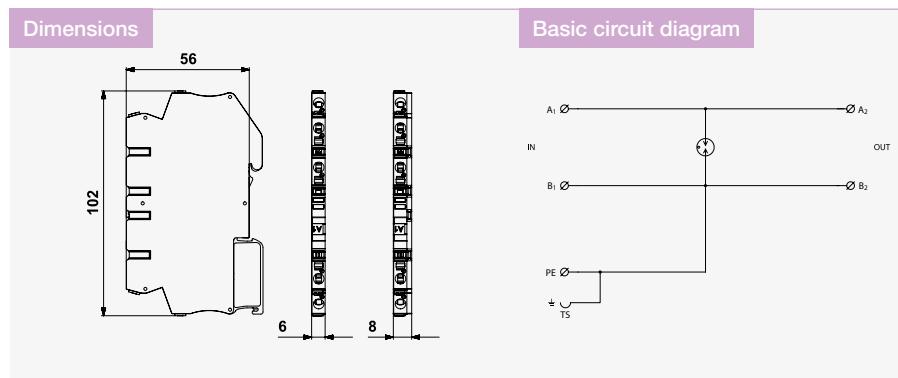

Parameter / Type	DS-B090-RB
Connection (input - output)	screwless terminals
Location of SPD	ST 2
Maximum operating voltage U_c	50 V AC / 70 V DC
Nominal load current I_L	10 A
C2 nominal discharge current (8/20 μ s) per core	10 kA
D1 impulse discharge current (10/350 μ s) per core	0,5 kA
C3 voltage protection level mode core-PE at 1 kV/ μ s	550 V
Response time core-PE	100 ns
Threshold frequency core-core	110 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A06070



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number


See page

by type

199

SPDs for data / signalling / telecommunication networks

SPDs for LSA-PLUS strips

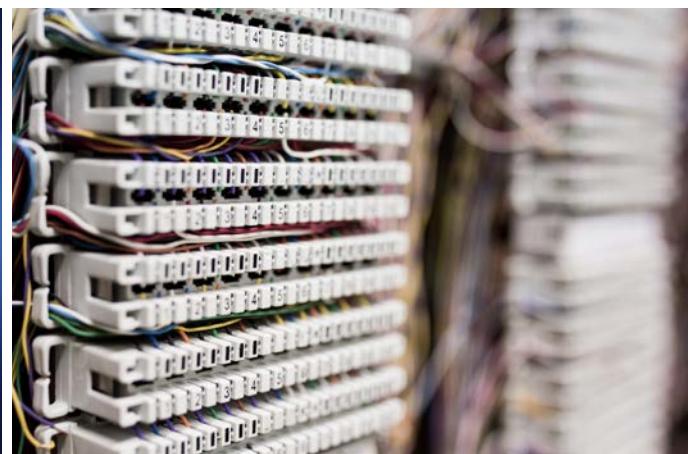


- Coarse and fine surge protection
- Easy connections to disconnection LSA-PLUS strips
- For 2-core signal lines in I&C, electronic security, fire detection and telecommunication systems
- Line CLSA - surge arresters

Overview of SPDs for data / signalling / telecommunication networks


For LSA-PLUS strips

CLSA-24, 48

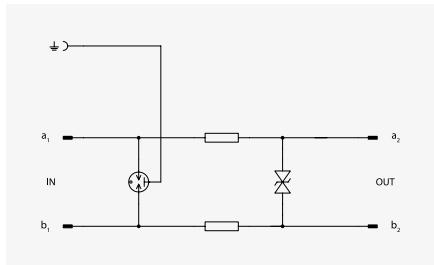


2-core floating line.
See page: 163

CLSA-ISDN, CLSA-TLF

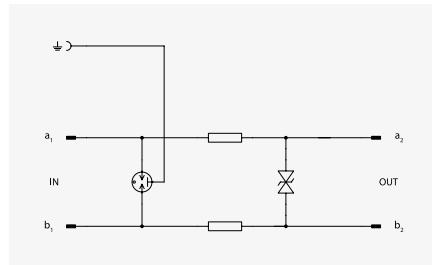

2-core floating phone line.
See page: 164

CLSA-DSL

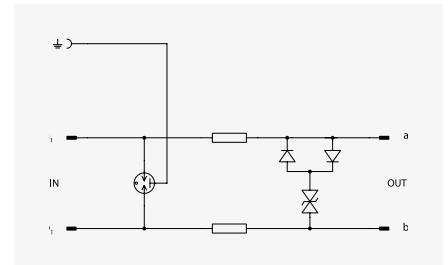

2-core high-speed floating line.
See page: 165


CLSA-...

SPDs for telecommunication and signalling networks, for LSA-PLUS strips
for LSA-PLUS disconnection strips

- combination of coarse and fine protection of data and I&C lines
- installation close to protected equipment
- for protection of communication interfaces and measuring lines of I&C, electronic security and fire detection

systems, etc. against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

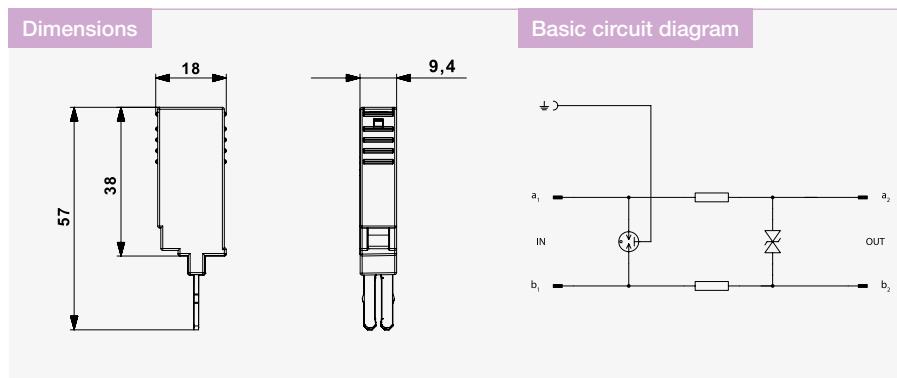


Parameter / Type	CLSA-24	CLSA-48
Connection (input - output)	LSA disconnection rail	LSA disconnection rail
Accessories	grounding rail	grounding rail
Location of SPD	ST 2+3	ST 2+3
Maximum operating voltage U_c	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA
C2 voltage protection level mode core-PE at I_n U_p	400 V	400 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	48 V	65 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	350 V	350 V
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Serial resistance per core R	1,6 Ω	1,6 Ω
Threshold frequency core-core f	4 MHz	6,5 MHz
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	LSA disconnection rail	LSA disconnection rail
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3	
Ordering number	A05171	A05172

Accessories	Ordering number	See page
Comb grounding rail	B95712	200
Universal disconnection rail LSA 2/10	B95710	200
Mounting frame – 1 position	B95711	200

CLSA-...

SPDs for telecommunication and signalling networks, for LSA-PLUS strips
for LSA-PLUS disconnection strips

- combination of coarse and fine protection of 2-core telecommunication lines
- installation close to protected equipment
- for protection of telecommunication lines against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

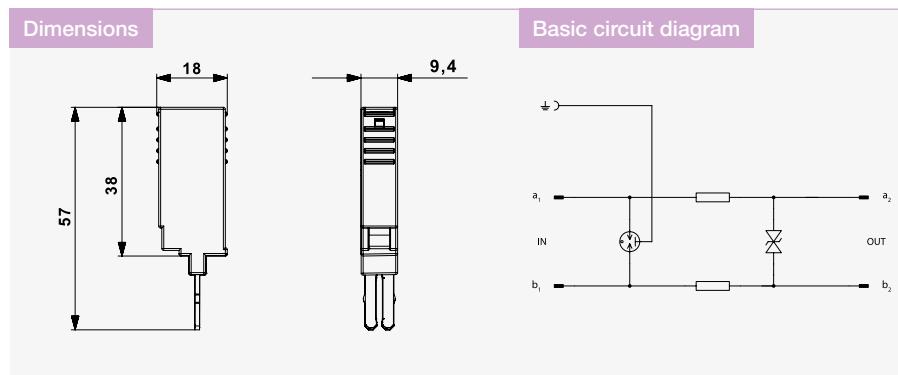

Parameter/Type	CLSA-ISDN	CLSA-TLF
Connection (input - output)	LSA disconnection rail	LSA disconnection rail
Accessories	grounding rail	grounding rail
Location of SPD	ST 2+3	ST 2+3
Maximum operating voltage U_c	85 V AC / 120 V DC	120 V AC / 170 V DC
Nominal load current I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA
C2 voltage protection level mode core-core at I_n U_p	220 V	310 V
C2 voltage protection level mode core-PE at I_n U_p	400 V	400 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	170 V	230 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	350 V	350 V
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Serial resistance per core R	1,6 Ω	1,6 Ω
Threshold frequency core-core f	16 MHz	14 MHz
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	LSA disconnection rail	LSA disconnection rail
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3	
Ordering number	A05174	A05173

+	Accessories	Ordering number	See page
	Comb grounding rail		
	Universal disconnection rail LSA 2/10	B95710	200
	Mounting frame – 1 position	B95711	200


CLSA-...

SPDs for telecommunication and signalling networks, for LSA-PLUS strips
for LSA-PLUS disconnection strips

- combination of coarse and fine protection of 2-core high-speed telecommunication lines including ADSL
- installation close to protected equipment

- CLSA-DSL for protection of telecommunication lines against impact of surge voltage


- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

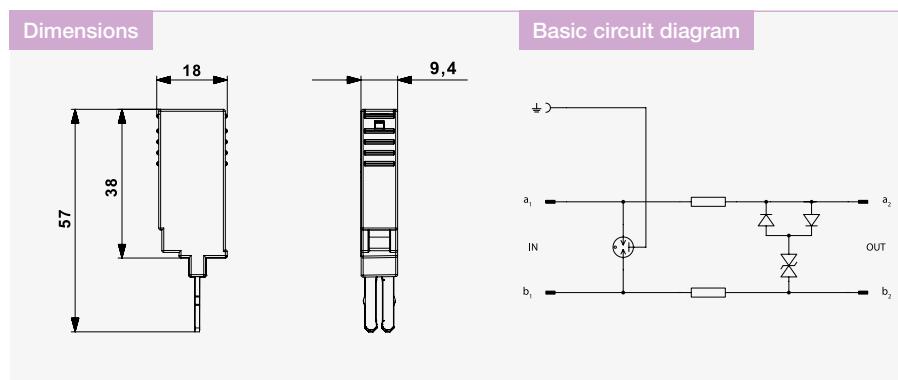

Parameter / Type	CLSA-DSL
Connection (input - output)	LSA disconnection rail
Accessories	grounding rail
Location of SPD	ST 2+3
Maximum operating voltage U_c	120 V AC / 170 V DC
Nominal load current I_L	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA
C2 voltage protection level mode core-core at I_n U_p	280 V
C2 voltage protection level mode core-PE at I_n U_p	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	230 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	400 V
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Serial resistance per core R	1,6 Ω
Threshold frequency core-core f	65 MHz
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	LSA disconnection rail
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A05176

Accessories	Ordering number	See page
Comb grounding rail	B95712	200
Universal disconnection rail LSA 2/10	B95710	200
Mounting frame – 1 position	B95711	200

Notes

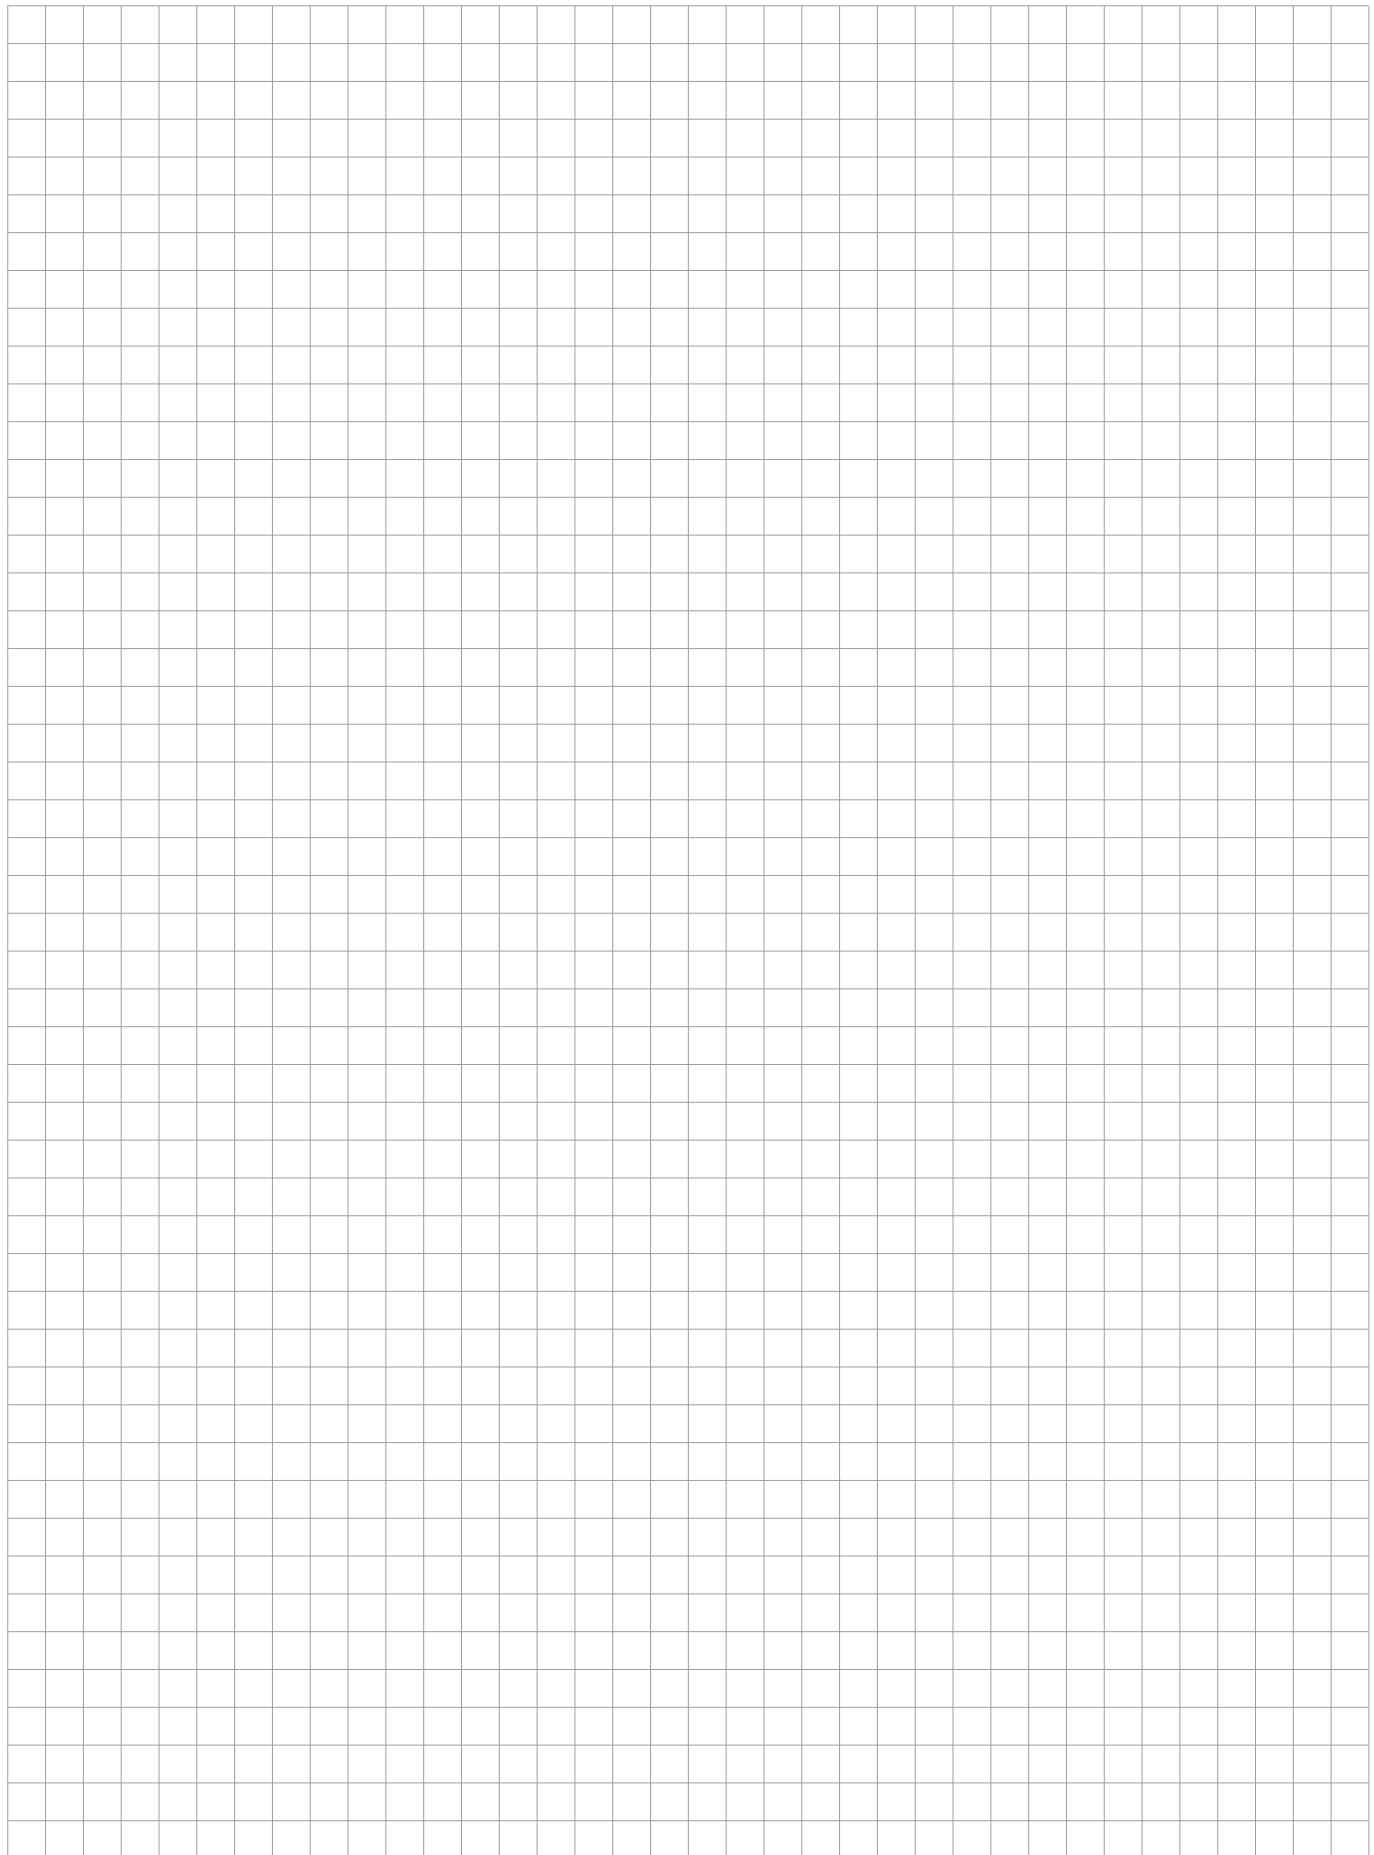A large grid of squares, approximately 20 columns by 25 rows, designed for writing notes or drawing diagrams.

SPDs for data / signalling / telecommunication networks

SPDs for phone lines




- Coarse and fine protection SPDs
- For protection of telecommunication lines (ISDN, xDSL, xDSL2, xDSL2+, VDSL3)

- Line DL-TLF-UHF
- Line DL-ISDN
- Line DL-VDSL

SPD for analogue phone line and xDSL protection
screw terminals

- combination of coarse and fine protection for phone and xDSL lines
- for protection of one line pair of telecommunication equipment
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

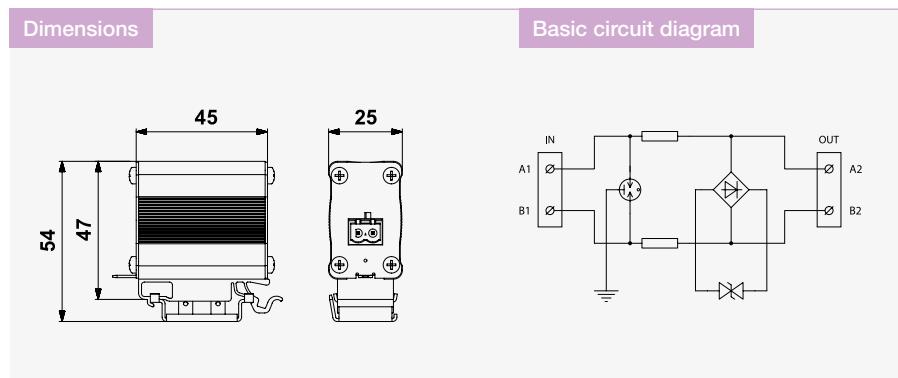

Parameter / Type	DL-TLF-UHF
Location of SPD	ST 1+2+3
Maximum operating voltage	U_c 170 V DC
Nominal load current at 25 °C	I_L 0,3 A
D1 total impulse current (10/350 µs) cores-PE	I_{total} 5 kA
C2 nominal discharge current (8/20 µs) core-core	I_n 5 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n)	U_p 600 V (10 kV / 5 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n)	U_p 900 V (10 kV / 5 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs)	U_p 250 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs)	U_p 550 V (10 A)
Response time core-core	t_a 1 ns
Response time core-PE	t_a 100 ns
Serial resistance per core	R 10 Ω
Threshold frequency core-core	f 150 MHz (@ -1dB)
Insertion attenuation	A <1 dB (@ 35 MHz)
Connection (input - output)	screw terminals for wire cross-section 0,2 to 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A07084


DL-VDSL3

NEW

SPD for high-speed xDSL lines screw terminals

- combination of coarse and fine protection for high-speed xDSL lines
- for protection of one line pair of ADSL2, VDSL2, VDSL2+, VDSL3

- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

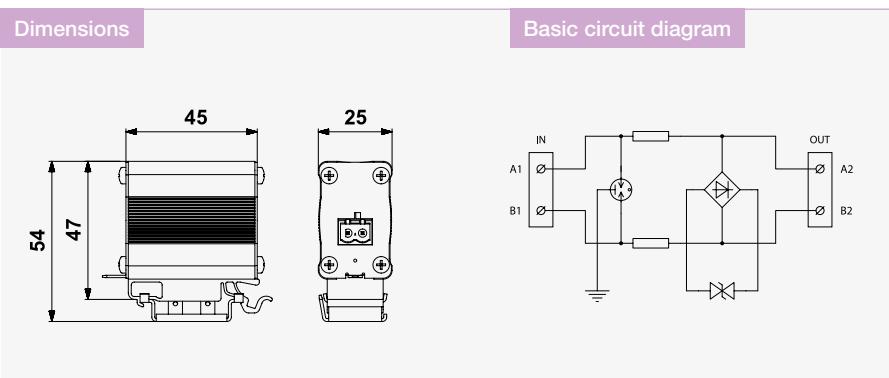


Parameter / Type	DL-VDSL3
Location of SPD	ST 1+2+3
Maximum operating voltage	U_c 60 V DC
Nominal load current at 25 °C	I_L 0,6 A
D1 total impulse current (10/350 µs) cores-PE	I_{total} 5 kA
C2 nominal discharge current (8/20 µs) core-core	I_n 5 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n)	U_p 450 V (10 kV / 5 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n)	U_p 1100 V (10 kV / 5 kA)
C3 voltage protection level mode core-core (@ I_n - 1kV/µs)	U_p 90 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs)	U_p 600 V (10 A)
Response time core-core	t_a 1 ns
Response time core-PE	t_a 100 ns
Serial resistance per core	R 2,2 Ω
Threshold frequency core-core	f 300 MHz (@ -1dB)
Insertion attenuation	A <0,2 dB (@ 35 MHz)
Connection (input - output)	screw terminals for wire cross-section 0,2 to 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A07120

DL-ISDN RJ45

SPD for telephone lines
RJ45 connectors

- combination of coarse and fine protection for ISDN lines
- for protection of one pair of ISDN line in telecommunication equipment

- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

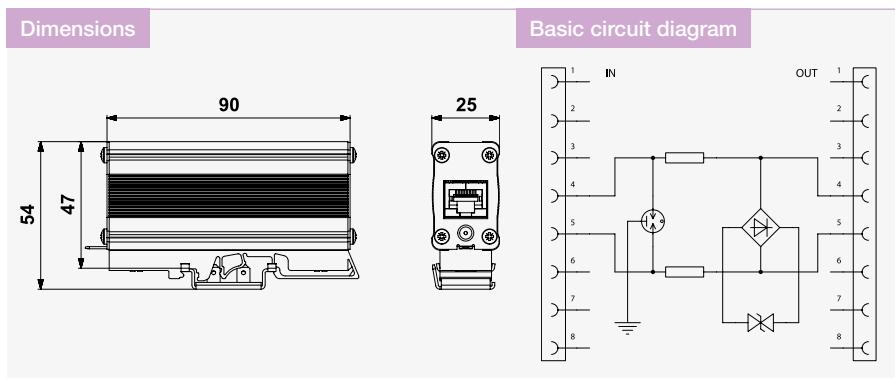

Parameter / Type	DL-ISDN RJ45
Location of SPD	ST 2+3
Maximum operating voltage U_c	86 V AC / 121 V DC
Nominal load current I_L	0,06 A
C2 nominal discharge current (8/20 μ s) per core I_n	2,5 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	270 V (5 kV/2,5 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_p) U_p	300 V (5 kV/2,5 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/ μ s) U_p	180 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/ μ s) U_p	400 V (10 A)
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Serial resistance per core R	6,8 Ω
Threshold frequency core-core f	80 MHz
Connection (input - output)	RJ 45/RJ 45
Degree of protection	IP 20
Range of operating temperatures (min/max)	-10 °C / 50 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A03382

SPDs for data / signalling / telecommunication networks

SPDs for Ethernet networks



- SPDs for protection of Ethernet networks up to 10 Gbps bitrate
- Variants for lines combined with Power over Ethernet (PoE)


- Line DL-Cat.6A – surge arresters
- Line DL-1G and DL-10G – surge arresters
- Line DL-...-60V – for general structured cabling networks

DL-Cat.5e POE plus

SPD for Fast Ethernet networks with separated PoE pairs
screwless terminals / RJ45 connector

- LPZ 1 and higher for Fast Ethernet with PoE
- combination of coarse and fine protection of Ethernet line with PoE
- installation close to protected equipment

- for protection of WiFi equipment, IP cameras, etc., against surge voltage
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

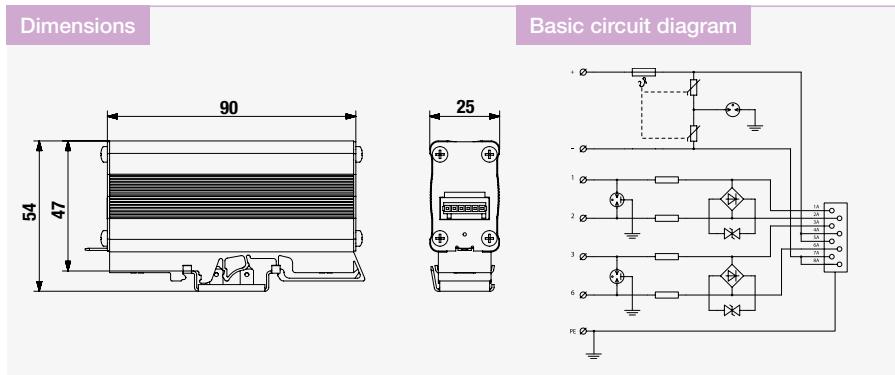

Parameter / Type		DL-Cat.5e POE plus
Location of SPD		ST 2+3
Maximum operating voltage	U_c	8,5 V DC
Nominal load current	I_L	0,1 A
C2 nominal discharge current (8/20 μ s) per core	I_n	1,5 kA
C2 voltage protection level mode core-core ($@U_{oc}/I_n$)	U_p	180 V (3 kV/1,5 kA)
C2 voltage protection level mode core-PE ($@U_{oc}/I_n$)	U_p	490 V (3 kV/1,5 kA)
C3 voltage protection level mode core-core ($@I_n$ - 1 kV/ μ s)	U_p	60 V (10 A)
C3 voltage protection level mode core-PE ($@I_n$ - 1 kV/ μ s)	U_p	560 V (10 A)
Response time core-core	t_a	1 ns
Response time core-PE	t_a	100 ns
Insertion attenuation at 100 MHz		1,5 dB
Serial resistance per core	R	0,27 Ω
Nominal voltage	U_n	48 V DC
Maximum operating voltage	U_c	40 V AC / 76 V DC
Nominal load current	I_L	1 A
Maximum load current		48,9 W
C2 nominal discharge current (8/20 μ s) core-core	I_n	1 kA
C2 voltage protection level mode (POE) ($@U_{oc}/I_n$)		320 V (2 kV/1 kA)
C2 voltage protection level mode core-PE ($@U_{oc}/I_n$)	U_p	780 V (2 kV/1 kA)
Response time core-core	t_a	25 ns
Response time core-PE	t_a	100 ns
Connection (input - output)		screwless terminals/RJ 45
Degree of protection		IP 20
Range of operating temperatures (min/max)		-10 °C / 50 °C
Mounting		DIN rail 35 mm
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number		A03806

DL-Cat. 6A-...

NEW

SPDs for Ethernet network and general structured cabling

LPZ 1 and higher


- fine surge protection
- installation at protected device inside LPZ 1 and higher (not suitable for LPZ 0)
- DL-Cat.6A - for protection of Ethernet networks (up to Cat.6A) without PoE

- DL-Cat.6A-60V - for protection of Ethernet networks (up to Cat.6A) with PoE and general structured cabling networks


- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder



Dimensions



Basic circuit diagram

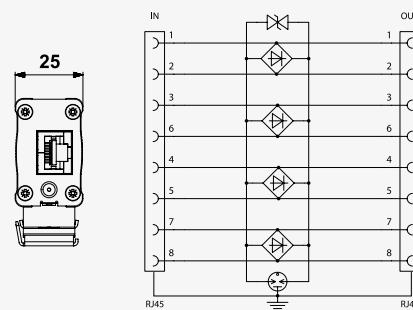


Parameter / Type	DL-Cat. 6A-60V	DL-Cat. 6A
Location of SPD	ST2+3	ST2+3
Maximum operating voltage core-core (data) U_c	60 V DC	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	60 V DC	8,5 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,2 kA	0,2 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	1,6 kA	1,6 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	130 V (0,4 kV/0,2 kA)	55 V (0,4 kV/0,2 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	400 V (0,4 kV/0,2 kA)	400 V (0,4 kV/0,2 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	130 V (0,4 kV/0,2 kA)	55 V (0,4 kV/0,2 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	130 V (10 A)	30 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	600 V (10 A)	600 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	130 V (10 A)	55 V (10 A)
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	500 MHz	500 MHz
Insertion attenuation at f_{max}	2,9 dB	2,9 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DIN rail 35 mm	DIN rail 35 mm
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / C2, C3	EN 61643-21+A1,A2 / C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	NO
Ordering number	A07108	A06574

DL-..G-RJ45-PoE-AB

SPDs for Ethernet networks with PoE
LPZ 0 and higher

- combination of coarse and fine protection of Ethernet line with PoE
- installation at the entry of the line into building or close to protected equipment, at the boundary of LPZ 0 and LPZ 1 or higher
- for protection of Ethernet line with PoE (Power over Ethernet) against surge voltage
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder
- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)

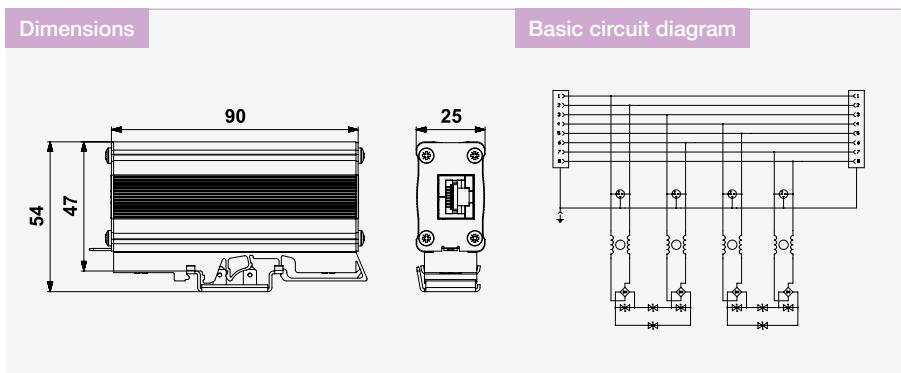


Parameter / Type	DL-1G-RJ45-PoE-AB	DL-10G-RJ45-PoE-AB
Location of SPD	ST 1+2+3	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC	58 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	0,15 kA	0,15 kA
C2 total discharge current (8/20 μ s) cores-PE I_{total}	10 kA	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	60 V (0,3 kV/0,15 kA)	60 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/ μ s) U_p	45 V (10 A)	45 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/ μ s) U_p	500 V (10 A)	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/ μ s) U_p	85 V (10 A)	85 V (10 A)
D1 total discharge current (10/350 μ s) cores-PE I_{total}	2 kA	2 kA
Response time core-core t_a	1ns	1ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	250 MHz	500 MHz
Insertion attenuation at f_{max}	1,2 dB	1,8 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DIN rail 35 mm	DIN rail 35 mm
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A06148	A06149

DL-10G-PoE-IP66

NEW

SPD for outdoor mounted Ethernet devices with PoE
LPZ 0

- combination of coarse and fine protection of Ethernet line with PoE
- protection of exterior Ethernet network devices (cameras, sensors, information panels, APs, etc.)
- exterior installation - anywhere at LPZ 0 because of IP66 water and dust protection
- suitable for all PoE types (IEEE 802.3 af/at/bt)
- in the scope of delivery: mounting material for panel and pole montage

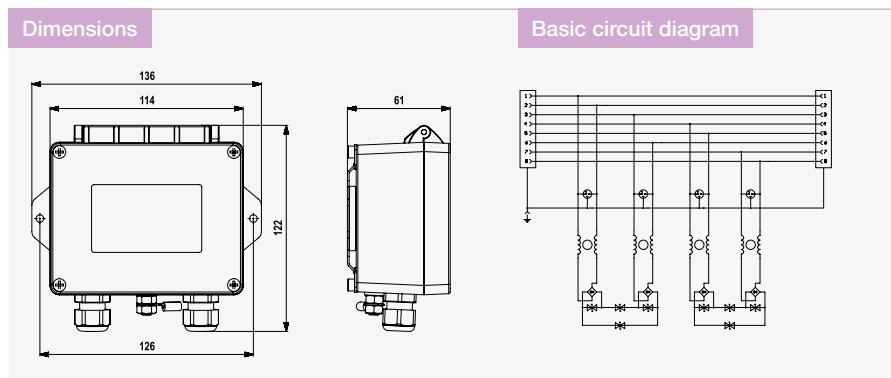


Parameter / Type	DL-10G-PoE-IP66
Location of SPD	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC
Nominal load current at 25 °C I_L	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	60 V (0,3 kV / 0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV / 1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV / 0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	45 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Maximum frequency f_{max}	500 MHz
Insertion attenuation at f_{max}	3,2 dB
Connection (input/output)	RJ45 / RJ45
Degree of protection	IP 66
Mounting	panel / pole / mast
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21 + A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt
Ordering number	A07098

SPDs for Ethernet networks with PoE and general structured cabling
LPZ 0 and higher

- combination of coarse and fine protection of Ethernet line with PoE and structured cabling networks with signals with amplitudes up to 60 V
- installation at the entry of the line into building or close to the protected

- equipment, at the boundary of LPZ 0 and LPZ 1 or higher
- for protection of Ethernet line with PoE, IP telephony, KNX, DMX, RS-485, signalling loops and other signals over twisted pairs against surge voltage

- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

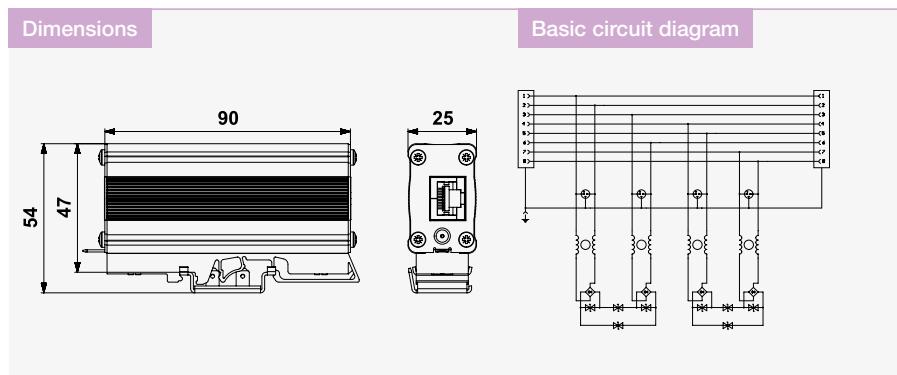

Parameter / Type	DL-1G-60V-PoE	DL-10G-60V-PoE
Location of SPD	ST 1+2+3	ST 1+2+3
Maximum operating voltage core-core (data) U_c	60 V DC	60 V DC
Maximum operating voltage pair-pair (PoE) U_c	60 V DC	60 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	120 V (0,3 kV/0,15 kA)	120 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	110 V (10 A)	110 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	85 V (10 A)	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA	2 kA
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	250 MHz	500 MHz
Insertion attenuation at f_{max}	1,5 dB	2,5 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DIN rail 35 mm	DIN rail 35 mm
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A07069	A07070

DL-1G-POE-INJECTOR

SPDs for Ethernet networks


passive midspan PoE injector with integrated SPD

- two-stage surge protection device for Ethernet and PoE protection with integrated PoE/PoE+ injector
- installed at the boundary of LPZ 0 and LPZ 1 zones or near the equipment to be protected


- to protect Ethernet Cat. 6 lines with PoE (Power over Ethernet), operating in A and B modes



Dimensions

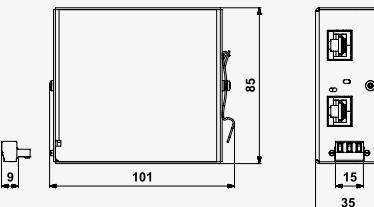


Basic circuit diagram

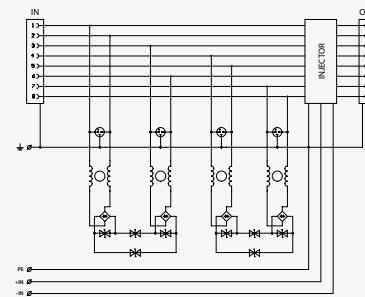

Parameter / Type	DL-1G-POE-INJECTOR
Location of SPD	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC
Nominal load current at 25 °C I_L	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	70 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (2,5 kV/1,25 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	80 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	80 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Maximum frequency f_{max}	250 MHz
Insertion attenuation at f_{max}	1,2 dB
Connection (input/output)	RJ45 / RJ45
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at
Ordering number	A06620

Notes

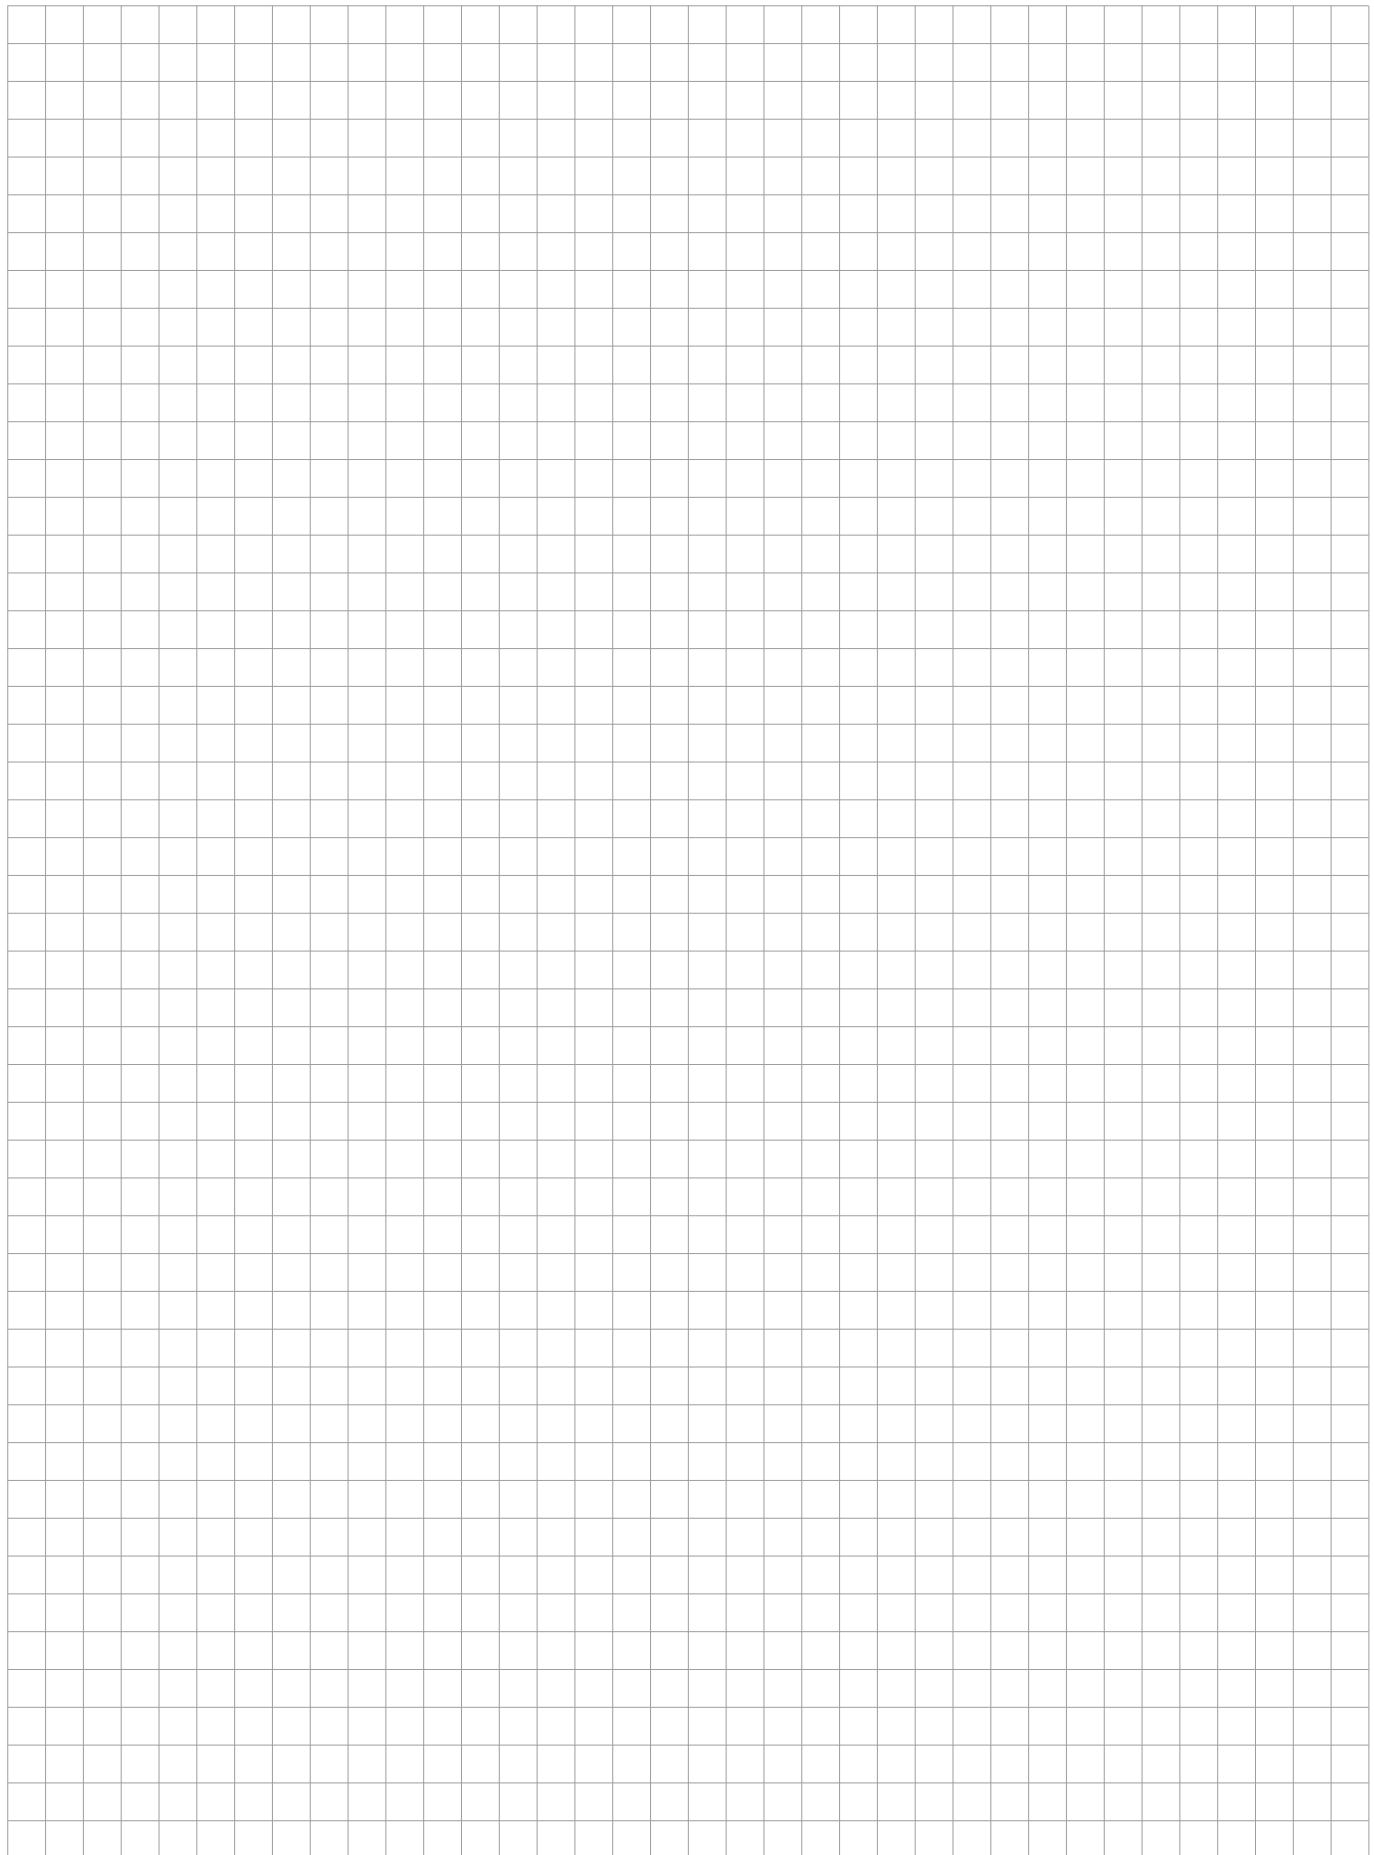

SPDs for data / signalling / telecommunication networks

Multichannel SPDs for Ethernet networks



- SPDs for protection of Ethernet networks up to 10Gbps
- Versions for lines with PoE (incl. injector) and general structured cabling
- Design for 19" RACK (height 1RU)
- Modular Plug&Play system

- DL-PL-RACK-1U – for various SPD modules installation
- DL-CS-RACK-1U-INJECTOR – for PoE injector with integrated SPD

SALTEK RACK system solution

NEW

For multichannel systems with (or without) 19" RACK cabinets are used, the new SALTEK RACK surge protection system is advantageous. This allows communication lines with different transmission categories to be routed through a single 1U profile and properly protected against overvoltages (according to the user's own configuration). This solution has not yet been possible with standard systems. The advantage is the space saving in the RACK cabinet due to the possibility of using different surge devices in a common box of 1U height. With dynamically expanding data networks, additional surge protection modules can be easily added to the boxes to expand the number of protected transmission channels.

■ DL-PL-RACK-1U

1RU box for mounting into a 19" RACK cabinet or standalone, allowing to be equipped with up to 16 independent plug-in modules of **DL-...-M** (or -R-M) series surge protection devices in the so called "Hot Plug&Play" system, i.e. with the possibility of changing the configuration of surge protectors during network operation without the necessity to disassemble the box. See Fig. 01.

■ DL-CS-RACK-1U-INJECTOR

1RU box for mounting into the 19" RACK cabinet, with pre-installed cabling for external power supply connection. Allows the integration of up to 6 midspan PoE injector **DL-1G-POE-PCB-INJECTOR** modules with integrated surge protection devices. See Fig. 02.

The injector can be programmed with jumpers to create either the **PoE A** or **PoE B** variant, including optional polarity setting for the **PoE A** version.

Fig. 01 DL-PL-RACK-1U and the installation of protection modules





Any combination of up to 16 different protection modules, as required

Fig. 02 DL-CS-RACK-1U-INJECTOR and the installation of protection modules



Up to 6 protection modules, as required

Fig. 03 Setting up the DL-1G-POE-PCB-INJECTOR module

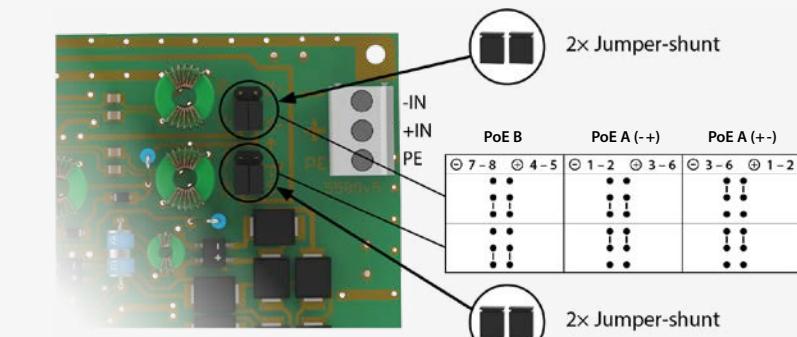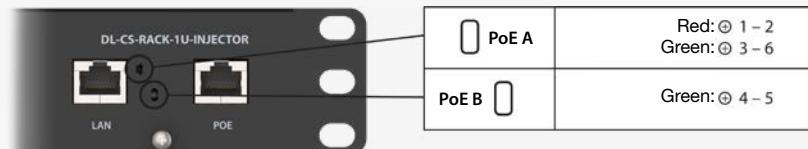


DL-PL-RACK-1U

SPDs for Ethernet networks, 19" RACK devices
mounting 1RU box for DL-...-M and DL-...-R-M modules

- mounting box for 19" Racks or free hanging
- for DL-...-M SPD and DL-...-R-M modules mounting
- surge protection of up to 16 independent lines
- 1RU profile
- easy Hot Plug&Play modules installation
- common modules grounding via box body



Dimensions

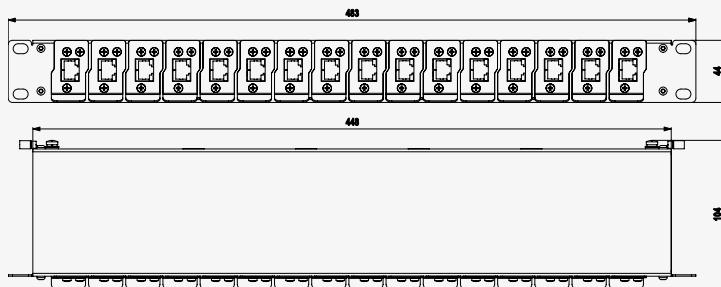

Type	DL-PL-RACK-1U
Ordering number	A04163


Cap for DL-PL-RACK-1U

SPDs for Ethernet networks, 19" RACK devices

- protection cap for unused modular slots



Dimensions




Type	Cap for DL-PL-RACK-1U
Ordering number	A04180

DL-Cat.6A-M / -R-M

Fine SPD module for Ethernet without PoE protection
LPZ 1 and higher

- fine surge protection
- installation at protected device inside LPZ 1 and higher (not suitable for LPZ 0)
- for protection of Ethernet networks (up to Cat.6A) without PoE
- installation into DL-PL-RACK-1U box
- DL-...-M with front output
- DL-...-R-M with rear output
- not applicable for Ethernet with PoE

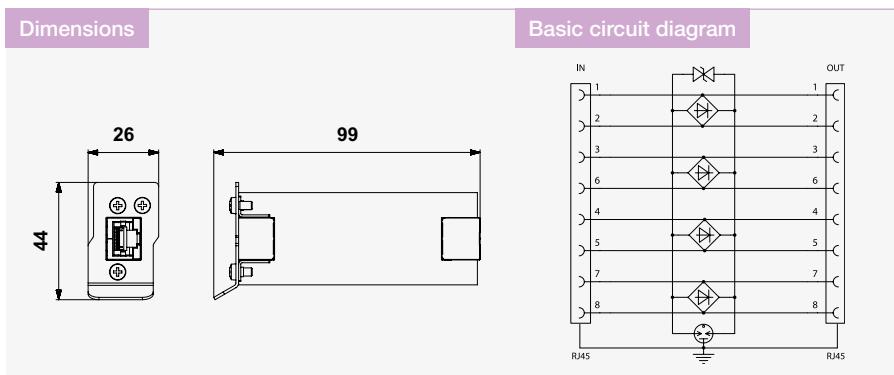

Parameter / Type	DL-Cat.6A-M	DL-Cat.6A-R-M
Location of SPD	ST2+3	ST2+3
Maximum operating voltage core-core (data) U_C	8,5 V DC	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_C	8,5 V DC	8,5 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,2 kA	0,2 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	1,6 kA	1,6 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	55 V (0,3 kV/0,15 kA)	55 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	400 V (2,5 kV/1,25 kA)	400 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	55 V (0,3 kV/0,15 kA)	55 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	30 V (10 A)	30 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	600 V (10 A)	600 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	55 V (10 A)	55 V (10 A)
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	500 MHz	500 MHz
Insertion attenuation at f_{max}	2,9 dB	2,9 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DL-PL-RACK-1U	DL-PL-RACK-1U
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / C2, C3	EN 61643-21+A1,A2 / C2, C3
According to IEEE 802.3 standard (PoE)	no	no
Ordering number	A04196	A04184

DL-Cat.6A-60V-M / -R-M

NEW

Fine SPD module for Ethernet with PoE and general structured cabling protection
LPZ 1 and higher

- fine surge protection of Ethernet line with PoE and structured cabling networks with signals with amplitudes up to 60 V
- installation at the entry of the line into building or close to the protected


equipment, at the boundary of LPZ 0 and LPZ 1 or higher

- for protection of Ethernet line with PoE, IP telephony, KNX, DMX, RS-485, signalling loops and other signals over twisted pairs against surge voltage


- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- installation into DL-PL-RACK-1U box
- DL-...-M with front output
- DL-...-R-M with rear output



Dimensions



Basic circuit diagram




Parameter / Type	DL-Cat.6A-60V-M	DL-Cat.6A-60V-R-M
Location of SPD	ST 2+3	ST 2+3
Maximum operating voltage core-core (data) U_C	60 V DC	60 V DC
Maximum operating voltage pair-pair (PoE) U_C	60 V DC	60 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,2 kA	0,2 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	1,6 kA	1,6 kA
C2 voltage protection level mode core-core (@ U_{OC}/I_n) U_p	130 V (0,4 kV/0,2 kA)	130 V (0,4 kV/0,2 kA)
C2 voltage protection level mode core-PE (@ U_{OC}/I_n) U_p	400 V (0,4 kV/1,2 kA)	400 V (0,4 kV/0,2 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{OC}/I_n) U_p	130 V (0,4 kV/0,2 kA)	130 V (0,4 kV/0,2 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	130 V (10 A)	130 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	600 V (10 A)	600 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	130 V (10 A)	130 V (10 A)
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	500 MHz	500 MHz
Insertion attenuation at f_{max}	2,9 dB	2,9 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DL-PL-RACK-1U	DL-PL-RACK-1U
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / C2, C3	EN 61643-21+A1,A2 / C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A04210	A04209

DL-..G-PoE-M

Dual-stage SPD module for Ethernet with PoE
LPZ 0 and higher

- combination of coarse and fine protection of Ethernet line with PoE
- instalation at the entry of the line into building or close to protected equipment, at the boundary of LPZ 0 and LPZ 1 or higher
- for protection of Ethernet line with PoE (Power over Ethernet) against surge voltage
- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- installation into DL-PL-RACK-1U box

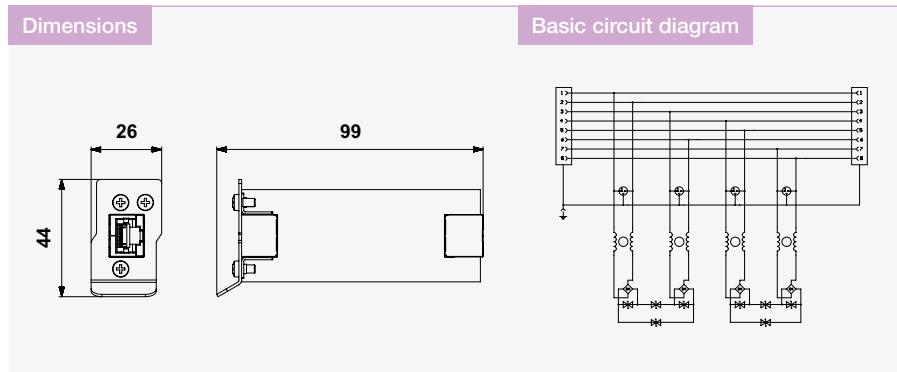

Parameter / Type	DL-1G-PoE-M	DL-10G-PoE-M
Location of SPD	ST 1+2+3	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC	58 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	60 V (0,3 kV/0,15 kA)	60 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	45 V (10 A)	45 V (10 A)
C3 voltage protection level mode core-PE (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	500 V (10 A)	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	85 V (10 A)	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA	2 kA
Response time core-core t_a	1ns	1ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	250 MHz	500 MHz
Insertion attenuation at f_{max}	1,2 dB	1,8 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DL-PL-RACK-1U	DL-PL-RACK-1U
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A04165	A04181

DL-..G-60V-PoE-M

NEW

Dual-stage SPD module for Ethernet with PoE and general structured cabling
LPZ 0 and higher

- combination of coarse and fine protection of Ethernet line with PoE and structured cabling networks with signals with amplitudes up to 60 V
- installation at the entry of the line into building or close to the protected


equipment, at the boundary of LPZ 0 and LPZ 1 or higher

- for protection of Ethernet line with PoE, IP telephony, KNX, DMX, RS-485, signalling loops and other signals over twisted pairs against surge voltage


- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- installation into DL-PL-RACK-1U box



Dimensions



Basic circuit diagram



Parameter / Type	DL-1G-60V-PoE-M	DL-10G-60V-PoE-M
Location of SPD	ST 1+2+3	ST 1+2+3
Maximum operating voltage core-core (data) U_c	60 V DC	60 V DC
Maximum operating voltage pair-pair (PoE) U_c	60 V DC	60 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	120 V (0,3 kV/0,15 kA)	120 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	110 V (10 A)	110 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	85 V (10 A)	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA	2 kA
Response time core-core t_a	1ns	1ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	250 MHz	500 MHz
Insertion attenuation at f_{max}	1,5 dB	2,5 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DL-PL-RACK-1U	DL-PL-RACK-1U
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A07085	A07086

DL-CS-RACK-1U-INJECTOR

SPDs for Ethernet networks, 19" RACK devices
1U height

- for SPD modules:
DL-1G-POE-PCB-INJECTOR,
Pg. 187
- including wiring for connection of SPD
modules (PoE supply)



Type	DL-CS-RACK-1U-INJECTOR
Ordering number	A06569


Accessories	Ordering number	See page
SPD module	A06570	187

DL-1G-POE-PCB-INJECTOR

SPD for Ethernet networks


LPZ 0 and higher, RJ45 connectors, with integrated PoE injector

- combination of coarse and fine protection of Ethernet line with PoE
- installation at the entry of the line into building and close to protected equipment, at the boundary of LPZ 0 and LPZ 1 or higher
- integrated midspan PoE injector (IEEE 802.3at)
- for protection of Ethernet line Cat. 6 with PoE (Power over Ethernet)
- for assembly to DL-CS-RACK-1U-INJECTOR

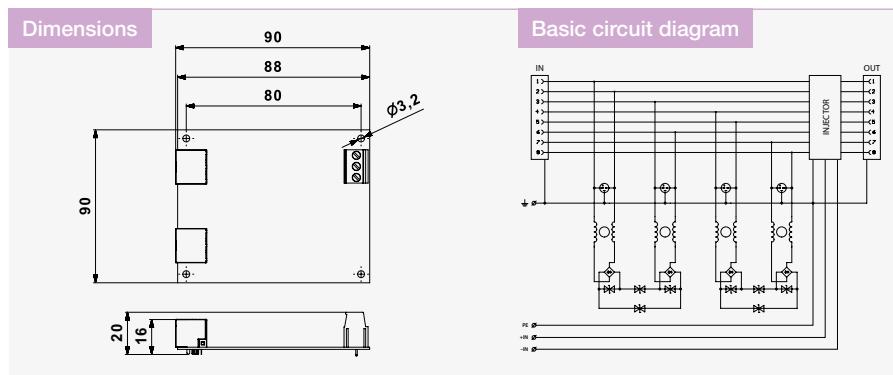

Parameter / Type	DL-1G-POE-PCB-INJECTOR
Location of SPD	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC
Nominal load current at 25 °C I_L	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	70 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	80 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	80 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Maximum frequency f_{max}	250 MHz
Insertion attenuation at f_{max}	1,2 dB
Connection (input/output)	RJ45 / RJ45
Degree of protection	IP 20
Mounting	DL-CS-RACK-1U-INJECTOR
Range of operating temperatures (min/max)	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at
Ordering number	A06570

Notes

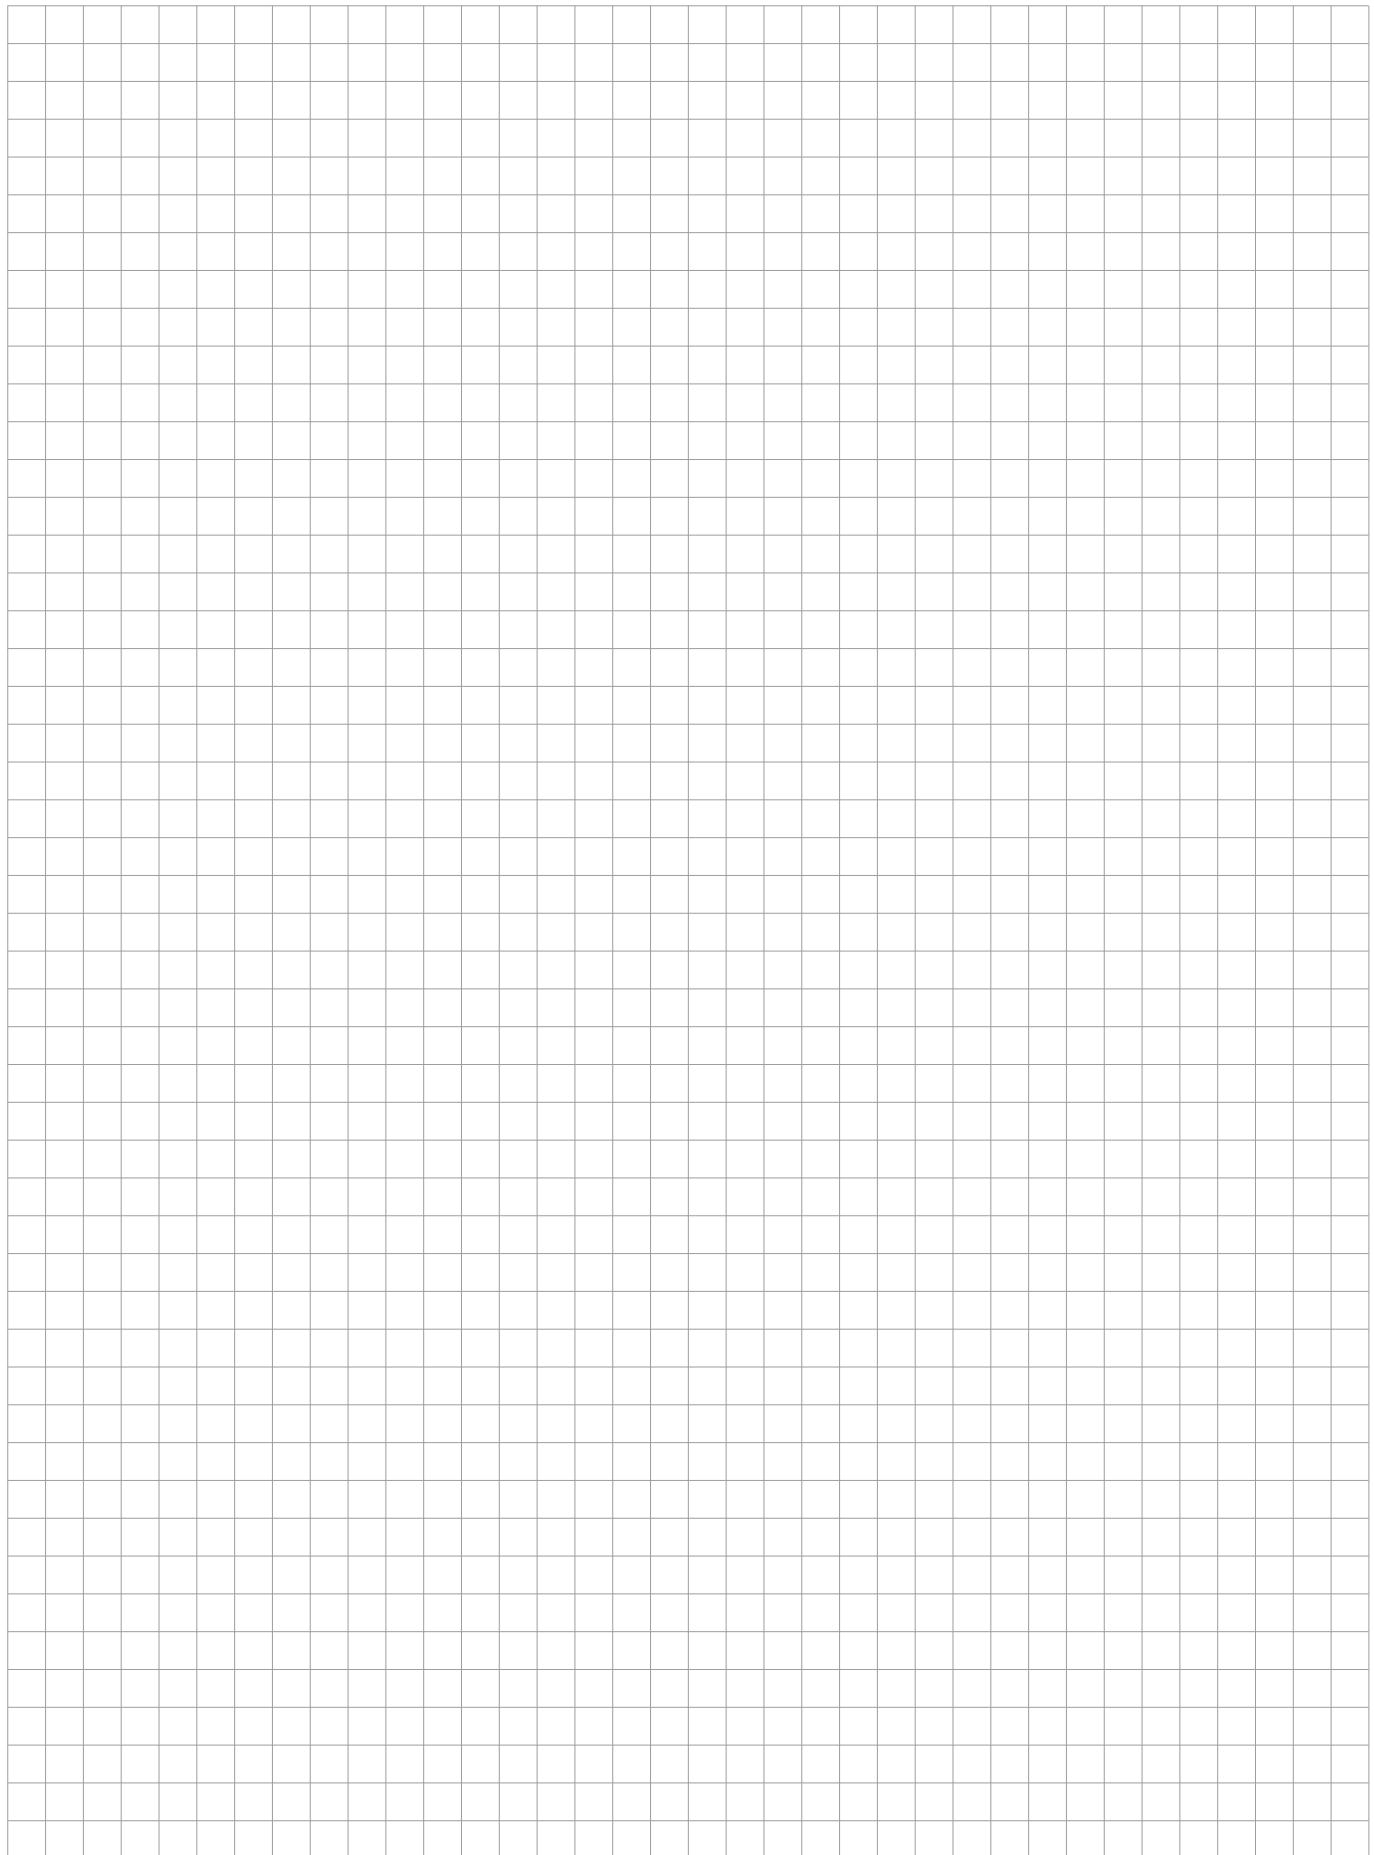A large grid of squares, approximately 20 columns by 25 rows, designed for writing notes or drawing diagrams.

SPDs for data / signalling / telecommunication networks

SPDs for devices with coaxial interfaces



- Protection of coaxial video interfaces
- Radiocommunication technology protection (transmitters and receivers)
- SPDs for TV/SAT/CATV receivers


- Line VL – surge arrester for video lines
- Line HX, ZX and FX – Lightning Current Arresters
- Line SX – Combined Arresters

VL-B75 F/F

SPDs for video distribution networks

BNC connectors, 75 Ω

- combination of coarse and fine protection for video circuits
- installation close to protected equipment
- for protection of video systems, CCTV, etc. against surge voltage
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

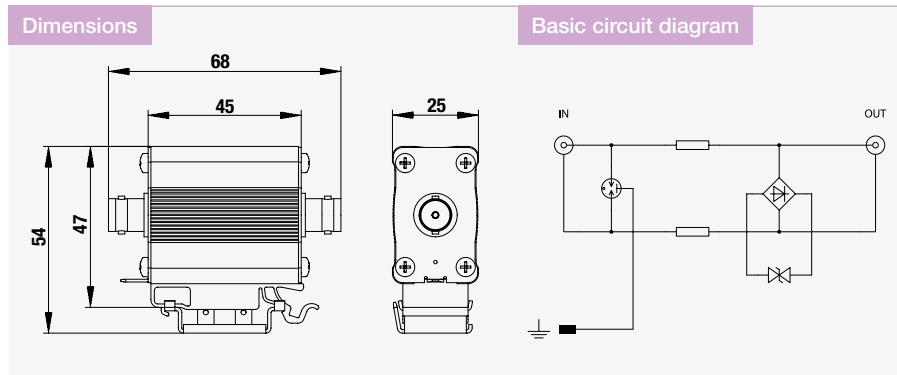


Parameter / Type	VL-B75 F/F
Location of SPD	ST 2+3
Maximum operating voltage U_c	8,5 V DC
Nominal load current at 25 °C I_L	0,06 A
C2 nominal discharge current (8/20 µs) core-SH I_n	5 kA
C2 nominal discharge current (8/20 µs) SH-PE I_n	5 kA
C2 voltage protection level mode core-SH at I_n U_p	150 V
C2 voltage protection level mode SH-PE at I_n U_p	350 V
C3 voltage protection level mode core-SH at 1 kV/µs U_p	35 V
C3 voltage protection level mode SH-PE at 1 kV/µs U_p	350 V
Response time core-SH t_a	1 ns
Response time SH-PE t_a	100 ns
Impedance Z	75 Ω
Frequency range f	0 - 150 MHz
Connection (input-output)	BNC 75
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / C2, C3
Ordering number	A03376

HX-090 SMA F/M

Lightning current arrester for coaxial lines
SMA connectors, 50 Ω

- lightning current arrester for coaxial line
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of radiocommunication equipment against impact of direct or indirect lightning strike
- suitable for the combined signal and power supply distribution

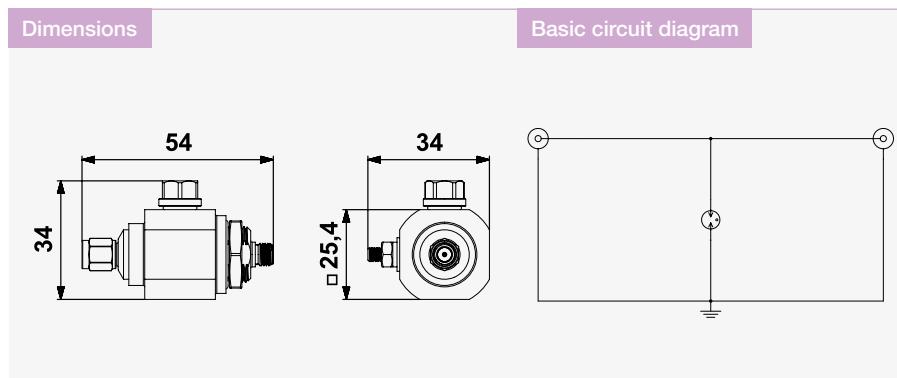


Parameter / Type	HX-090 SMA F/M
Location of SPD	ST 1+2
Maximum operating voltage	U _c 70 V DC
Nominal load current at 25 °C	I _L 6 A
C2 nominal discharge current (8/20 µs) core-PE	I _n 10 kA
D1 impulse discharge current (10/350 µs) core-PE	I _{imp} 2,5 kA
Dynamic spark-over voltage at 1kV/µs	U _{dyn} 700 V
Response time core-PE	t _a 100 ns
Impedance	Z 50 Ω
Power (CW)	P 40 W
Frequency range	f 0 - 3,8 GHz
Insertion loss typ. (max.)	A 0,2 (0,4) dB
VSWR typ. (max.)	1,1 (1,2)
Connection (input-output)	SMA 50
Degree of protection	IP 66
Mounting	panel (Ø 17mm) / HX holder
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A04134

Accessories	Ordering number	See page
HX Holder	A01564	199

HX-... N50 F/.

Lightning current arrester for coaxial lines
N connectors, 50 Ω

- lightning current arrester for coaxial line
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of radiocommunication equipment against impact of direct or indirect lightning strike
- suitable for the combined signal and power supply distribution

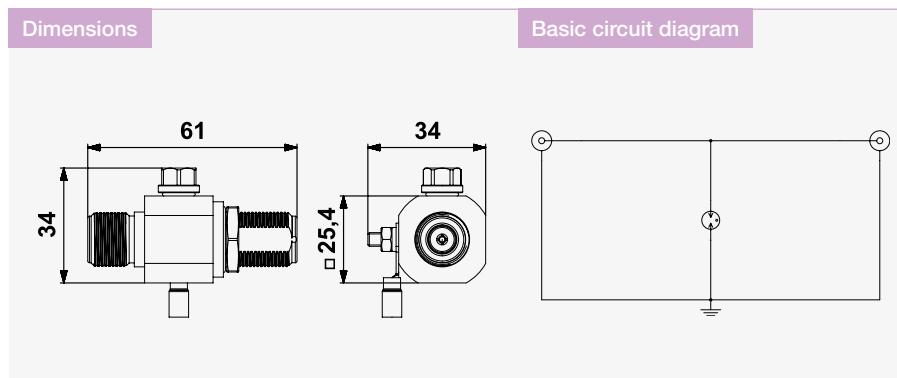


Parameter / Type	HX-090 N50 F/F	HX-090 N50 F/M	HX-230 N50 F/F	HX-230 N50 F/M
Location of SPD	ST 1+2	ST 1+2	ST 1+2	ST 1+2
Maximum operating voltage U_c	70 V DC	70 V DC	180 V DC	180 V DC
Nominal load current at 25 °C I_L	6 A	6 A	6 A	6 A
C2 nominal discharge current (8/20 µs) core-PE I_n	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 µs) core-PE I_{imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
Dynamic spark-over voltage at 1 kV/µs U_{dyn}	700 V	700 V	800 V	800 V
Response time core-PE t_a	100 ns	100 ns	100 ns	100 ns
Impedance Z	50 Ω	50 Ω	50 Ω	50 Ω
Power (CW) P	40 W	40 W	295 W	295 W
Frequency range f	0 - 3,8 GHz			
Insertion loss typ. (max.) A	0,2 (0,4) dB	0,2 (0,4) dB	0,2 (0,4) dB	0,2 (0,4) dB
VSWR typ. (max.)	1,1 (1,2)	1,1 (1,2)	1,1 (1,2)	1,1 (1,2)
Connection (input-output)	N 50	N 50	N 50	N 50
Degree of protection	IP 66	IP 66	IP 66	IP 66
Mounting	panel (Ø 17 mm) / HX holder			
Range of operating temperatures (min/max)	-40 °C / 80 °C			
According to standard	EN 61643-21+A1,A2 / D1, C2, C3			
Ordering number	A03405	A03346	A03511	A03510

Accessories	Ordering number	See page
HX Holder	A01564	199

HX-... N50 F/.

Lightning current arrester for coaxial lines
N connectors, 50 Ω

- lightning current arrester for coaxial line
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of radiocommunication equipment against impact of direct or indirect lightning strike
- suitable for the combined signal and power supply distribution

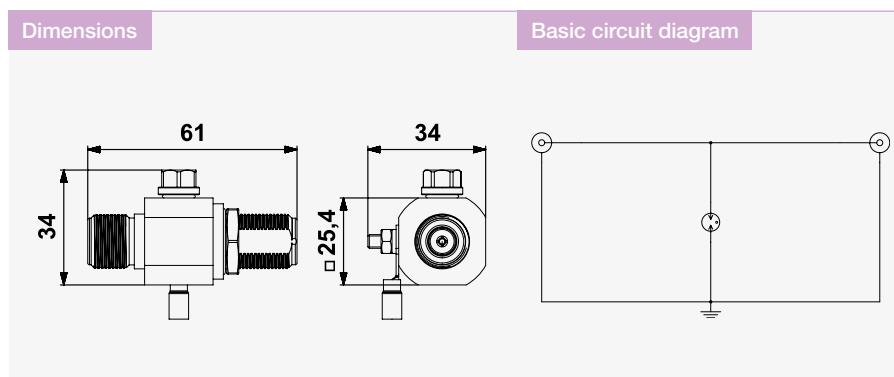

Parameter / Type	HX-350-N50 F/F	HX-350-N50 F/M	HX-470-N50 F/F	HX-470-N50 F/M
Location of SPD	ST 1+2	ST 1+2	ST 1+2	ST 1+2
Maximum operating voltage	U _c 250 V DC	250 V DC	360 V DC	360 V DC
Nominal load current at 25 °C	I _L 6 A	6 A	6 A	6 A
C2 nominal discharge current (8/20 µs) core-PE	I _n 10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 µs) core-PE	I _{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
Dynamic spark-over voltage at 1 kV/µs	U _{dyn} 900 V	900 V	980 V	980 V
Response time core-PE	t _a 100 ns	100 ns	100 ns	100 ns
Impedance	Z 50 Ω	50 Ω	50 Ω	50 Ω
Power (CW)	P 570 W	570 W	1175 W	1175 W
Frequency range	f 0 - 3,5 GHz	0 - 3,5 GHz	0 - 3,0 GHz	0 - 3,0 GHz
Insertion loss typ. (max.)	A 0,2 (0,4) dB	0,2 (0,4) dB	0,2 (0,4) dB	0,2 (0,4) dB
VSWR typ. (max.)		1,1 (1,2)	1,1 (1,2)	1,1 (1,2)
Connection (input-output)		N 50	N 50	N 50
Degree of protection		IP 66	IP 66	IP 66
Mounting		panel (Ø 17 mm) / HX holder	panel (Ø 17 mm) / HX holder	panel (Ø 17 mm) / HX holder
Range of operating temperatures (min/max)		-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard		EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A06703	A06704	A06555	A06556


Accessories	Ordering number	See page
HX Holder	A01564	199

ZX-0,44-N50-F/F

Lightning current arrester for coaxial lines

connectors N 50 Ω, λ/4 short circuit impedance transformer

- lightning current arrester uses λ/4 short circuit impedance transformer
- installation at the boundary of LPZ 0 and LPZ 1 zones (or higher) at the line entry into building
- for protection of coaxial radio lines and telecommunication devices against impact of direct or indirect lightning strike
- it works like band-pass (filter) for a relatively narrow frequency spectrum around the base frequency, outside of this spectrum it works like a short circuit (not suitable for combination with power supply)

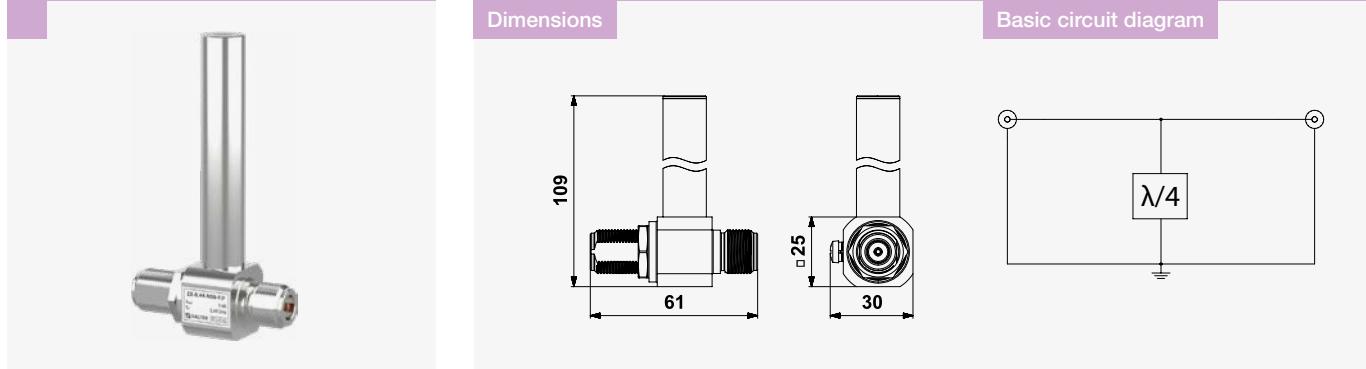

Parameter / Type	ZX-0,44-N50-F/F	
Location of SPD	ST 1+2+3	
C2 nominal discharge current (8/20 µs) core-PE	I_n	20 kA
D1 impulse discharge current (10/350 µs) core-PE	I_{imp}	5 kA
Dynamic spark-over voltage at 1 kV/µs	U_{dyn}	0,25 V
Response time core-PE	t_a	1 ns
Impedance	Z	50 Ω
Power (CW)	P	2000 W
Frequency range*	f	390 - 490 MHz
Insertion loss typ. (max.)	A	0,1 (0,2) dB
VSWR typ. (max.)		1,1 (1,2)
Connection (input-output)		N 50
Degree of protection		IP 66
Mounting	panel (Ø 17 mm) / HX holder	
Range of operating temperatures (min/max)	-40 °C / 80 °C	
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	
Ordering number	A06207	


* Frequency range according to tuning

Accessories	Ordering number	See page
HX Holder	A01564	199

FX-... .75 T F/F

Lightning current arrester for floating coaxial lines
F connectors, 75 Ω

- lightning current arrester with floating shielding (separated by GDT)
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of floating coaxial lines of TV and CCTV systems, suitable as the 1st level of surge for protection in coordination with the SX type
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

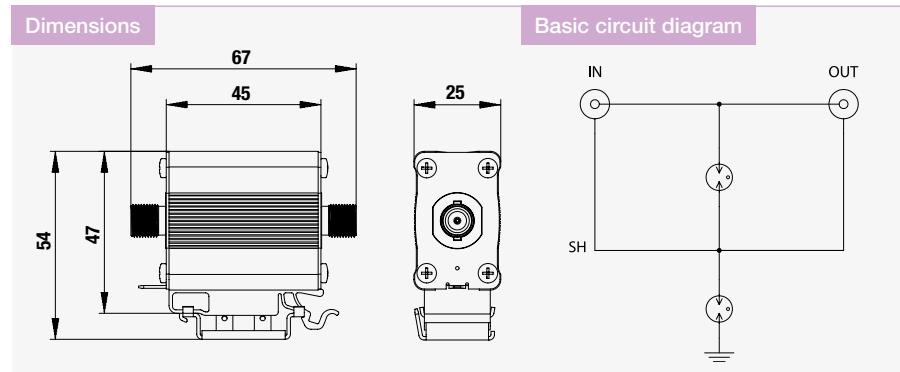


Parameter / Type	FX-090 B75 T F/F	FX-090 F75 T F/F	FX-230 F75 T F/F
Location of SPD	ST 1	ST 1	ST 1
Maximum operating voltage	U_c	70 V DC	70 V DC
Nominal load current at 25 °C	I_L	4 A	4 A
C2 nominal discharge current (8/20 µs) core-SH	I_n	10 kA	10 kA
C2 nominal discharge current (8/20 µs) SH-PE	I_n	10 kA	10 kA
D1 impulse discharge current (10/350 µs) core-SH	I_{imp}	2,5 kA	2,5 kA
D1 impulse discharge current (10/350 µs) SH-PE	I_{imp}	2,5 kA	2,5 kA
C3 voltage protection level mode core-SH at 1 kV/µs	U_p	1 200 V	1 200 V
C3 voltage protection level mode SH-PE at 1 kV/µs	U_p	600 V	600 V
Response time core-SH	t_a	100 ns	100 ns
Response time SH-PE	t_a	100 ns	100 ns
Impedance	Z	75 Ω	75 Ω
Frequency range	f	0 - 2,15 GHz	0 - 2,15 GHz
Insertion loss typ. (max.)	A	0,6 dB (1 dB)	0,6 dB (1 dB)
VSWR typ. (max.)		1,2 (1,5)	1,2 (1,5)
Connection (input-output)		BNC 75	F 75
Degree of protection		IP 20	IP 20
Mounting		DIN rail 35 mm	DIN rail 35 mm
Range of operating temperatures (min/max)		-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / D1, C2	EN 61643-21+A1,A2 / D1, C2	EN 61643-21+A1,A2 / D1, C2
Ordering number	A03385	A03387	A03392

FX-090-F75 F/F

Lightning current arrester for coaxial lines
F connectors, 75 Ω

- lightning current arrester with grounded shielding
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of coaxial lines of TV and CCTV systems, suitable as the 1st level of surge for protection in coordination with the SX type
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

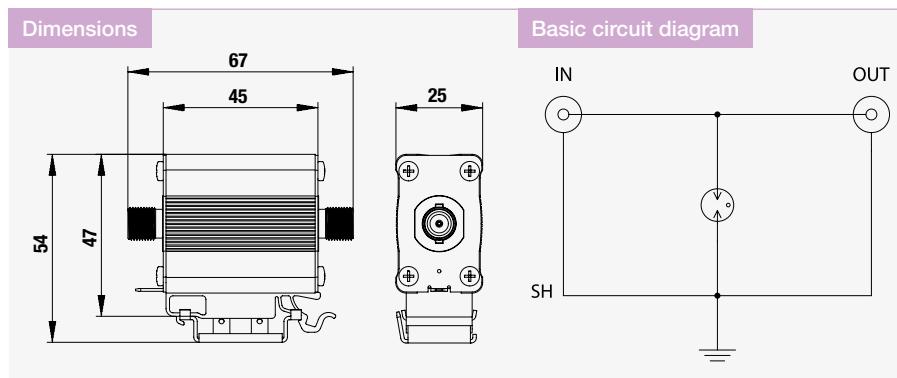


Parameter / Type	FX-090-F75 F/F
Location of SPD	ST 1
Maximum operating voltage U_c	70 V DC
Nominal load current at 25 °C I_L	4 A
C2 nominal discharge current (8/20 µs) core-PE I_n	10 kA
D1 impulse discharge current (10/350 µs) core-PE I_{imp}	2,5 kA
C3 voltage protection level mode core-PE at 1 kV/µs U_p	1 200 V
Response time core-PE t_a	100 ns
Impedance Z	75 Ω
Frequency range f	0 - 2,3 GHz
Insertion loss typ. (max.) A	0,6 dB (1 dB)
VSWR typ. (max.)	1,2 (1,5)
Connection (input-output)	F 75
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / D1, C2
Ordering number	A04212

Accessories	Ordering number	See page
Grounding block F75	B14893	199

SX-090-B50 F/F

Dual-stage lightning arrester for coaxial lines
BNC connectors, 50 Ω

- dual stage coarse and fine arrester, shielding connected to protective grounding
- installation close to protected equipment or at the LPZ 0_B - LPZ 1 boundary
- for complex protection of sensitive professional receivers inputs (GPS, SAT,...) against overvoltage
- suitable for combined RF and DC distribution via coaxial cable
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

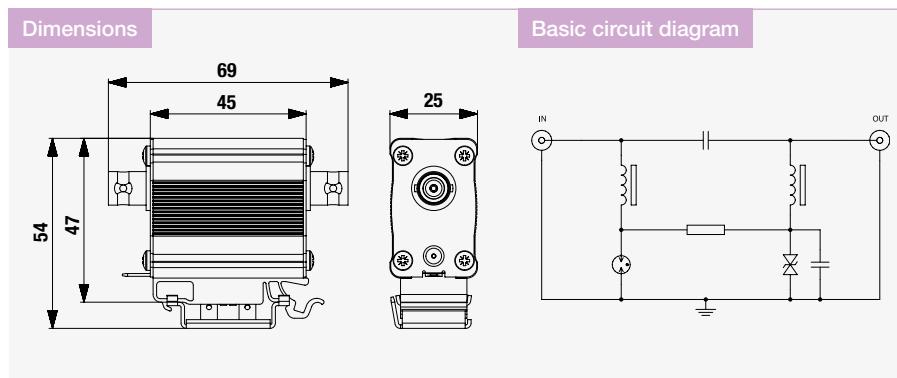


Parameter / Type	SX-090-B50 F/F
Location of SPD	ST 1+2+3
Maximum operating voltage U_c	26 V DC
Nominal load current at 25 °C I_L	0,7 A
C2 nominal discharge current (8/20 µs) core-PE I_n	2,5 kA
D1 impulse discharge current (10/350 µs) core-PE I_{imp}	0,5 kA
C2 voltage protection level mode core-PE at I_n U_p	700 V
C3 voltage protection level mode core-PE at $I_n = 100$ A (10/1000) U_p	85 V
Response time core-PE t_a	1 ns
Impedance Z	50 Ω
Frequency range f	0 - 3 GHz
Insertion loss typ. (max.) A	1,5 (3,0) dB
VSWR typ. (max.)	1,2 (1,3)
Connection (input-output)	BNC 50
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A04157

SX-090 F75 F/F

Surge arrester for coaxial lines
F connectors, 75 Ω

- dual stage coarse and fine arrester, shielding connected to protective grounding
- installation close to protected equipment or at the LPZ 0_B - LPZ 1 boundary

- for complex protection of coaxial inputs of TV/SAT and CCTV systems against surge voltage
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

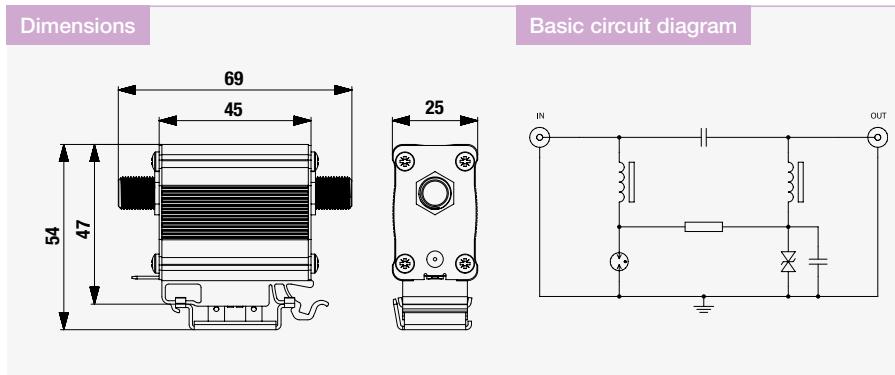

Parameter / Type	SX-090-F75 F/F
Location of SPD	ST 1+2+3
Maximum operating voltage U_c	26 V DC
Nominal load current at 25 °C I_L	0,7 A
C2 nominal discharge current (8/20 µs) core-PE I_n	2,5 kA
D1 impulse discharge current (10/350 µs) core-PE I_{imp}	0,5 kA
C2 voltage protection level mode core-PE at I_n U_p	700 V
C3 voltage protection level mode core-PE at $I_n = 100$ A (10/1000) U_p	85 V
Response time core-PE t_a	1 ns
Impedance Z	75 Ω
Frequency range f	0 - 2,3 GHz
Insertion loss typ. (max.) A	1,5 (3,0) dB
VSWR typ. (max.)	1,5 (2,0)
Connection (input-output)	F 75
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A04158



Accessories

Grounding block F75

Ordering number


See page

B14893

199

Accessories for SPDs for data / signalling / telecommunication networks

Accessories for ICT SPDs

	Product	Ordering number	Example of use
	Connection bridge JRS 10P	B41175	

Accessories for ICT SPDs

	Product	Packaging	Ordering number	Example of use
	CS-2,5/2	25 pcs	B470102	
	CS-2,5/3	20 pcs	B470103	
	CS-2,5/4	15 pcs	B470104	
	CS-2,5/5	10 pcs	B470105	
	CS-2,5/10	5 pcs	B470109	

Accessories for SPDs for coaxial lines

	Product	Ordering number	Example of use
	HX Holder	A01564	

Accessories for SPDs for coaxial lines

	Product	Ordering number	Example of use
	Grounding block F75	B14893	

Accessories for SPDs for data / signalling / telecommunication networks

Accessories for ICT SPDs

	Product	Ordering number	Example of use
	Comb grounding rail	B95712	
	Universal disconnection rail LSA 2/10	B95710	
	Mounting frame – 1 position	B95711	

Accessories for BD., DM., DP.

	Product	Ordering number	Example of use
	Short-circuiting module DMZ-V-0 For short-circuiting (and earthing) of all cores connected to base BDM/BG. Suitable for unused wires or for maintenance and work on the line	A05818	

Isolating Spark Gaps ISG and ISG Ex



- Earth termination systems of power installations
- Earth termination systems of telecommunication systems
- Auxiliary earth electrodes of voltage operated earth fault circuit breakers
- Rail earth electrode of AC and DC railways
- Measuring earth electrode for laboratories
- Systems of pipeline cathodic protection
- Service entry masts for low-voltage overhead cables
- Bypassing insulated flanges and insulated couplings of pipelines.

- Ex types for ATEX:
 - II2G Ex mb IIC T6 Gb
 - II2D Ex tb IIIC T80 °C Db
- Classes:
 - N – normal duty
 - H – heavy duty

Isolating spark gaps

The isolating spark gaps of ISG series are designed to balance differential potentials on conductive non-live parts of technological equipment of buildings that are not galvanically interconnected.

In the event that a difference in potential arises between the conductive parts, the ISGs are able to interconnect the parts for a transient period of time and thus eliminate the dangerous voltage difference. The ISGs may well be used for temporary connection of different grounds which due to functional reasons cannot be galvanically linked to each other, or for bridging insulated flanges on pipes, etc.

The ISG products are designed for use in normal environments, while the ISG EX versions are designed for areas with a risk of explosion and be used e.g. in the gas or chemical industries. Due to their IP 67 protection level they can be installed both indoors and outdoors.

The ISGs are manufactured in various sparkover voltage variants. They can be used as protective elements against dangerous contact voltages (product types with switching voltages of 50 V), or for temporary interconnection of various conductive metal parts using higher switching voltages which, however, for safety reasons are not considered to be a problem.



ELEKTROTECHNICKÝ ZKUŠEBNÍ ÚSTAV



Podlezn 129/2, 171 02 Praha 8 - Troja

CERTIFICATE

No.: 1200589

Product: Isolating spark gap

Type: ISG-... (H Ex), ISG-... (H Ex), ISGO-... (H Ex), ISGT-... H Ex

Rating: $U_s = 35, 70, 250, 350 \text{ V AC}$
 $I_{sc} = 50, 100, 375, 500 \text{ mA DC}$
 $I_{sc} = 50, 100 \text{ kA AC}$

Ordering firm: SALTEK s.r.o.
Draždiánská 56/185, 400 07 Ústí nad Labem - Krásné Březno, Czech Republic

Manufacturer: SALTEK s.r.o.
Draždiánská 56/185, 400 07 Ústí nad Labem - Krásné Březno, Czech Republic

Trade mark:

The test results are stated in the test-report No.: 022180-01/01 of 13.11.2020

A sample of the product was found to be in conformity with:
EN 62561-2 ed. 2 2018 (IEC 62561-2:2017, IEC 62561-2:2017)

Other data:
Certificate was issued on the basis of fulfillment of requirements of the "EZÚ certificate" certification scheme and on the basis of agreement No. 022180 between the client and the Electrotechnical Testing Institute.

Compliance of the product with mentioned standards and regulations ensures compliance of the product with essential requirements of Government Order No. 118/2016 Sb. (2014/35/EU) as amended and the certificate may be used as a supporting document for the EU Declaration of Conformity under Act No. 99/2016 Coll., on Conformity Assessment of Products When Made Available on the Market, as amended.

The validity of the certificate is limited to: 23.11.2023

24.11.2020 _____
Prague _____
Mr. Miroslav Sedláček
Head of Certification Body


Physical-Technical Testing Institute
Ostrava - Radavice

022180-01

Physical-Technical Testing Institute
Ostrava - Radavice



(1) Supplementary EU - Type Examination Certificate No. 3

(2) Equipment or Protective Systems Intended for Use
in Potentially Explosive Atmospheres
(Directive 2014/34/EU)

(3) EU - Type Examination Certificate number:
FTZÚ 14 ATEX 0155X

(4) Product: Isolating Spark Gap, type ISG(-)-... H Ex

(5) Manufacturer: SALTEK s.r.o.



(6) Address: Draždiánská 56, 400 07 Ústí nad Labem, Czech Republic

(7) This supplementary certificate extends EC - Type Examination Certificate No. FTZÚ 14 ATEX 0155X to apply to products designed and constructed in accordance with the specification set out in the Schedule of the said certificate but having any variations specified in the Schedule attached to this certificate and the documents therein referred to.

(8) The Physical-Technical Testing Institute, Notified Body number 1026, in accordance with Articles 17 of Directive 2014/34/EU of the European Parliament and of the Council, dated 26.02.2014, certifies that this product, as modified by this supplementary certificate, has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of products intended for use in potentially explosive atmospheres given in Annex II to the Directive.

(9) In accordance with Article 41 of Directive 2014/34/EU, EC-Type Examination Certificates referring to 94/9/EC that were in existence prior to the date of application of 2014/34/EU (20.04.2016) may be referenced as if they were issued in accordance with Directive 2014/34/EU. Supplementary Certificates with EC-Type Examination Certificates, and new issues of such certificates, may continue to bear the original certificate number issued prior to 20.04.2016.

(10) Compliance with the Essential Health and Safety Requirements has been assured by compliance with:
EN 60079-0:2012+A11:2013, EN 60079-18:2015, EN 60079-31:2014

(11) The marking of the product shall include the following:



(12) This certificate is valid till: **28.02.2023**

Responsible person:

Dipl. Ing. Lukáš Martinka
Head of Certification Body


This certificate is granted subject to the general conditions of the FTZÚ, s.p.
This certificate may only be reproduced in its entirety and without any change, schedule included.
Physical-Technical Testing Institute, s.p., Pískarska 1337/7, 716 07 Ostrava - Radavice, Czech Republic
tel +420 595 223 111, fax +420 596 232 672, ftzu@ftzu.cz, www.ftzu.cz

Date of issue: 28.02.2018
Page: 1/3

ISG-A100

Isolating Spark Gap connecting pins

- encapsulated high-performance isolating spark gap
- for indirect connection (earthing) of isolated conductive parts under lightning conditions, where direct connection is not allowed

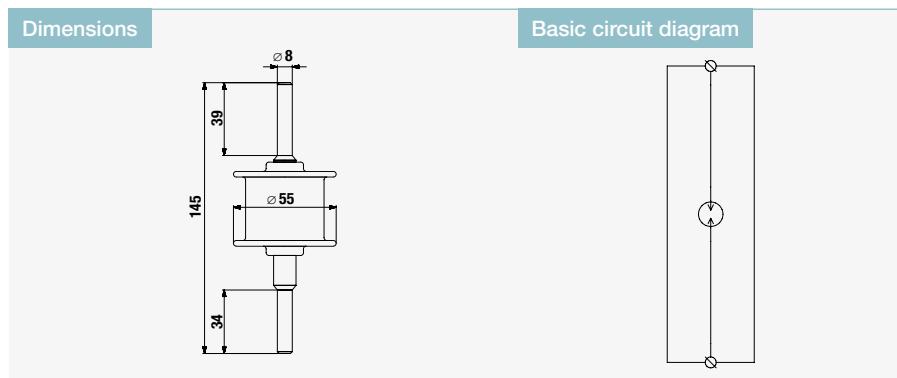


Parameter/Type	ISG-A100
Lightning impulse current I_{imp}	100 kA
Rated impulse sparkover voltage U_{rimp}	5 kV
Rated power frequency withstand voltage U_{WAC}	2,5 kV
Isolation resistance	100 MΩ
Classification	class H - heavy duty
Degree of protection	IP 67
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 62561-3:2012, IEC 62561-3:2012
Ordering number	A03590

ISG-...

Isolating Spark Gap

two M8 bolts with nuts

- encapsulated high-performance isolating spark gap
- for indirect connection (earthing) of isolated conductive parts under lightning conditions, where direct connection is not allowed

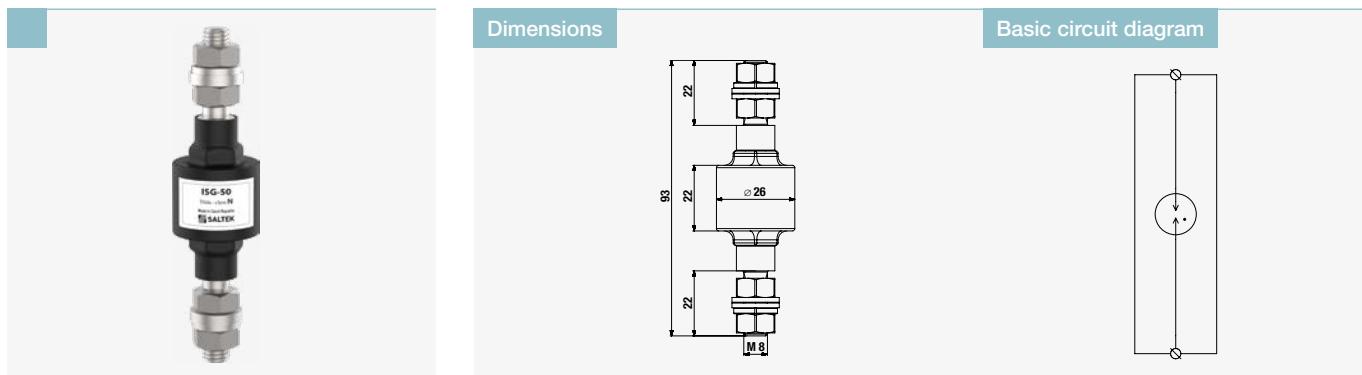


Parameter/Type	ISG-50	ISG-100	ISG-500
Lightning impulse current I_{imp}	50 kA	50 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class N - normal duty	class N - normal duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 62561-3:2012, IEC 62561-3:2012		
Ordering number	A04086	A04078	A04127

ISGC-...

Isolating Spark Gap connecting cables

- encapsulated high-performance isolating spark gap
- for indirect connection (earthing) of isolated conductive parts under lightning conditions, where direct connection is not allowed

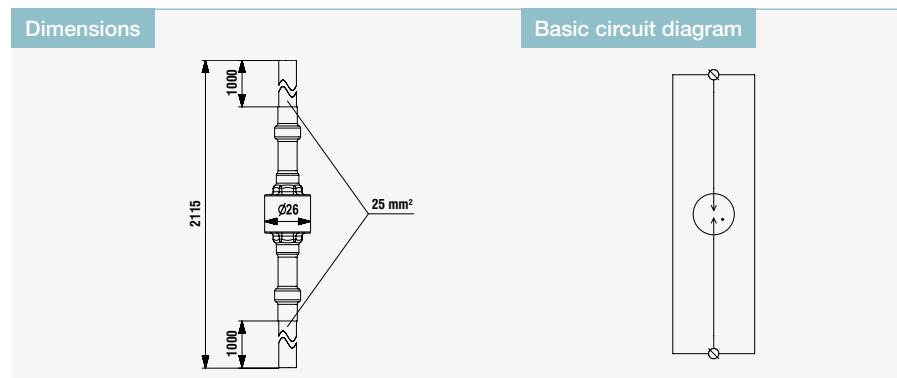



Parameter/Type	ISGC-50	ISGC-100	ISGC-500
Lightning impulse current I_{imp}	50 kA	50 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class N - normal duty	class N - normal duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 62561-3:2012, IEC 62561-3:2012		
Ordering number	A05365	A05366	A05368

ISGO-500

Isolating Spark Gap

connecting cable and M8 bolt with nut

- encapsulated high-performance isolating spark gap
- for indirect connection (earthing) of isolated conductive parts under lightning conditions, where direct connection is not allowed

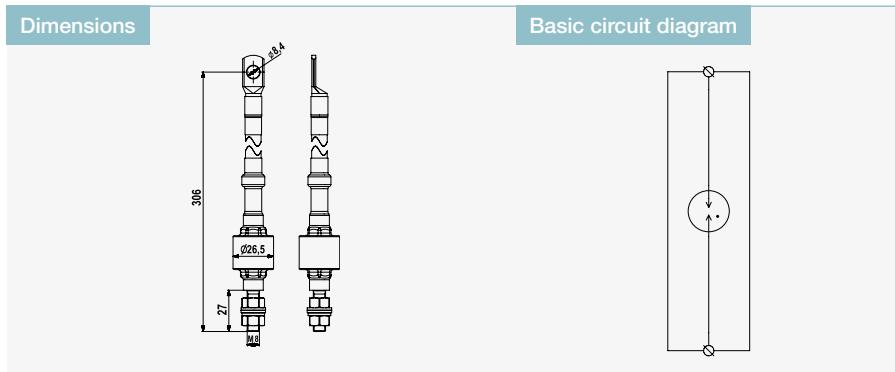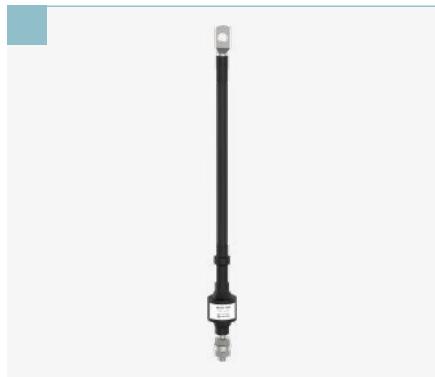


Parameter/Type	ISGO-500
Lightning impulse current I_{imp}	100 kA
Rated impulse sparkover voltage U_{rimp}	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,35 kV
Rated DC withstand voltage U_{WDC}	0,5 kV
Isolation resistance	100 MΩ
Classification	class H - heavy duty
Degree of protection	IP 67
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 62561-3:2012, IEC 62561-3:2012
Ordering number	A05518

ISG-...H Ex

Isolating spark gaps for explosive environment (Ex)
two M8 bolts with nuts, stainless steel enclosure

- heavy duty encapsulated isolating spark gap for use in Hazardous (Ex) Areas
- for indirect connection (earthing) of isolated conductive parts under lightning conditions
- for safe installation in Ex zone

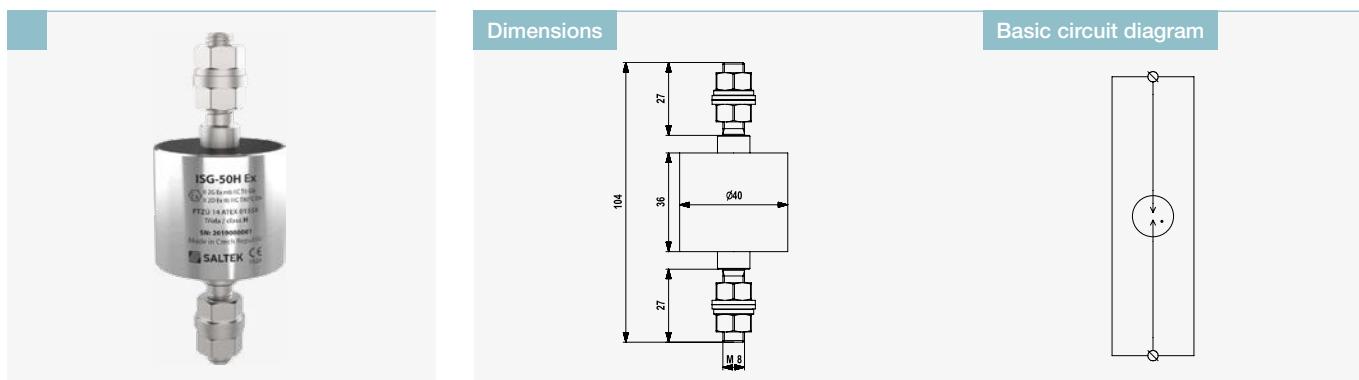


Parameter/Type	ISG-50H Ex	ISG-100H Ex	ISG-500H Ex
Lightning impulse current I_{imp}	100 kA	100 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class H - heavy duty	class H - heavy duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 50 °C	-40 °C / 50 °C	-40 °C / 50 °C
According to standard	EN 62561-3, EN 60079-0, EN 60079-18, EN 60079-31		
Explosion-tested version	II 2G Ex mb IIC T6 Gb, II 2D Ex tb IIIC T80°C Db		
Ordering number	A04131	A04132	A04109

ISGC-...H Ex

Isolating spark gaps for explosive environment (Ex)
connecting cables, stainless steel enclosure

- heavy duty encapsulated isolating spark gap for use in Hazardous (Ex) Areas
- for indirect connection (earthing) of isolated conductive parts under lightning conditions
- for safe installation in Ex zone

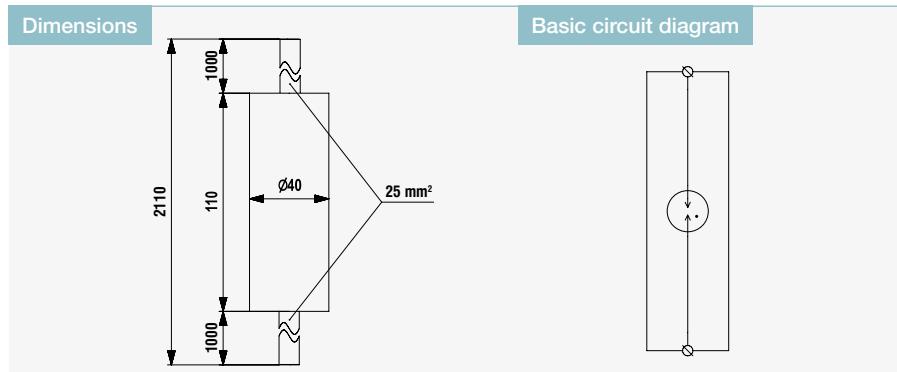


Parameter/Type	ISGC-50H Ex	ISGC-100H Ex	ISGC-500H Ex
Lightning impulse current I_{imp}	100 kA	100 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class H - heavy duty	class H - heavy duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 50 °C	-40 °C / 50 °C	-40 °C / 50 °C
According to standard	EN 62561-3, EN 60079-0, EN 60079-18, EN 60079-31		
Explosion-tested version	II 2G Ex mb IIC T6 Gb, II 2D Ex tb IIIC T80°C Db		
Ordering number	A04128	A04129	A04120

ISGO-...H Ex


Isolating spark gaps for explosive environment (Ex)
connecting cable and M8 bolt with nut, stainless steel enclosure

- heavy duty encapsulated isolating spark gap for use in Hazardous (Ex) Areas
- for indirect connection (earthing) of isolated conductive parts under lightning conditions
- for safe installation in Ex zone

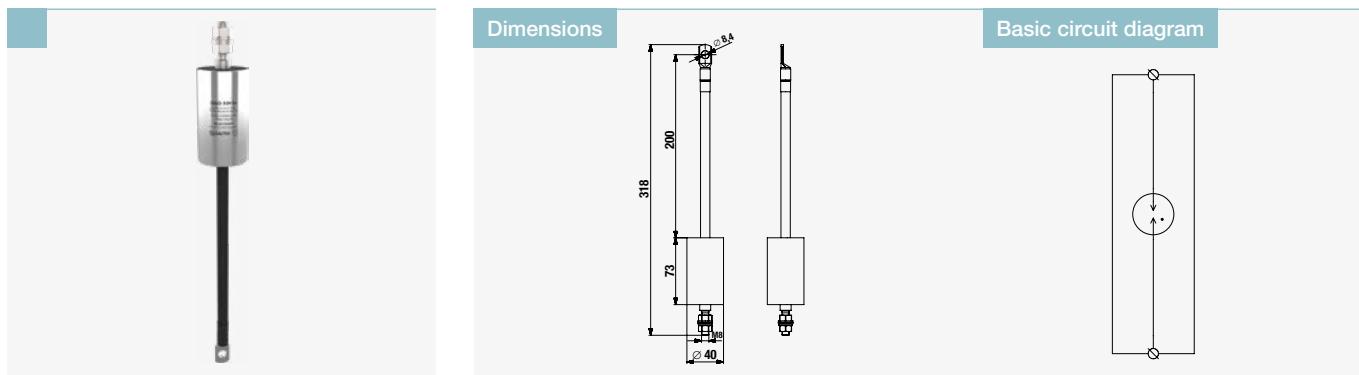


Parameter/Type	ISGO-50H Ex	ISGO-100H Ex	ISGO-500H Ex
Lightning impulse current I_{imp}	100 kA	100 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class H - heavy duty	class H - heavy duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 50 °C	-40 °C / 50 °C	-40 °C / 50 °C
According to standard	EN 62561-3, EN 60079-0, EN 60079-18, EN 60079-31		
Explosion-tested version	II 2G Ex mb IIC T6 Gb, II 2D Ex tb IIIC T80°C Db		
Ordering number	A06142	A06143	A05514

Notes

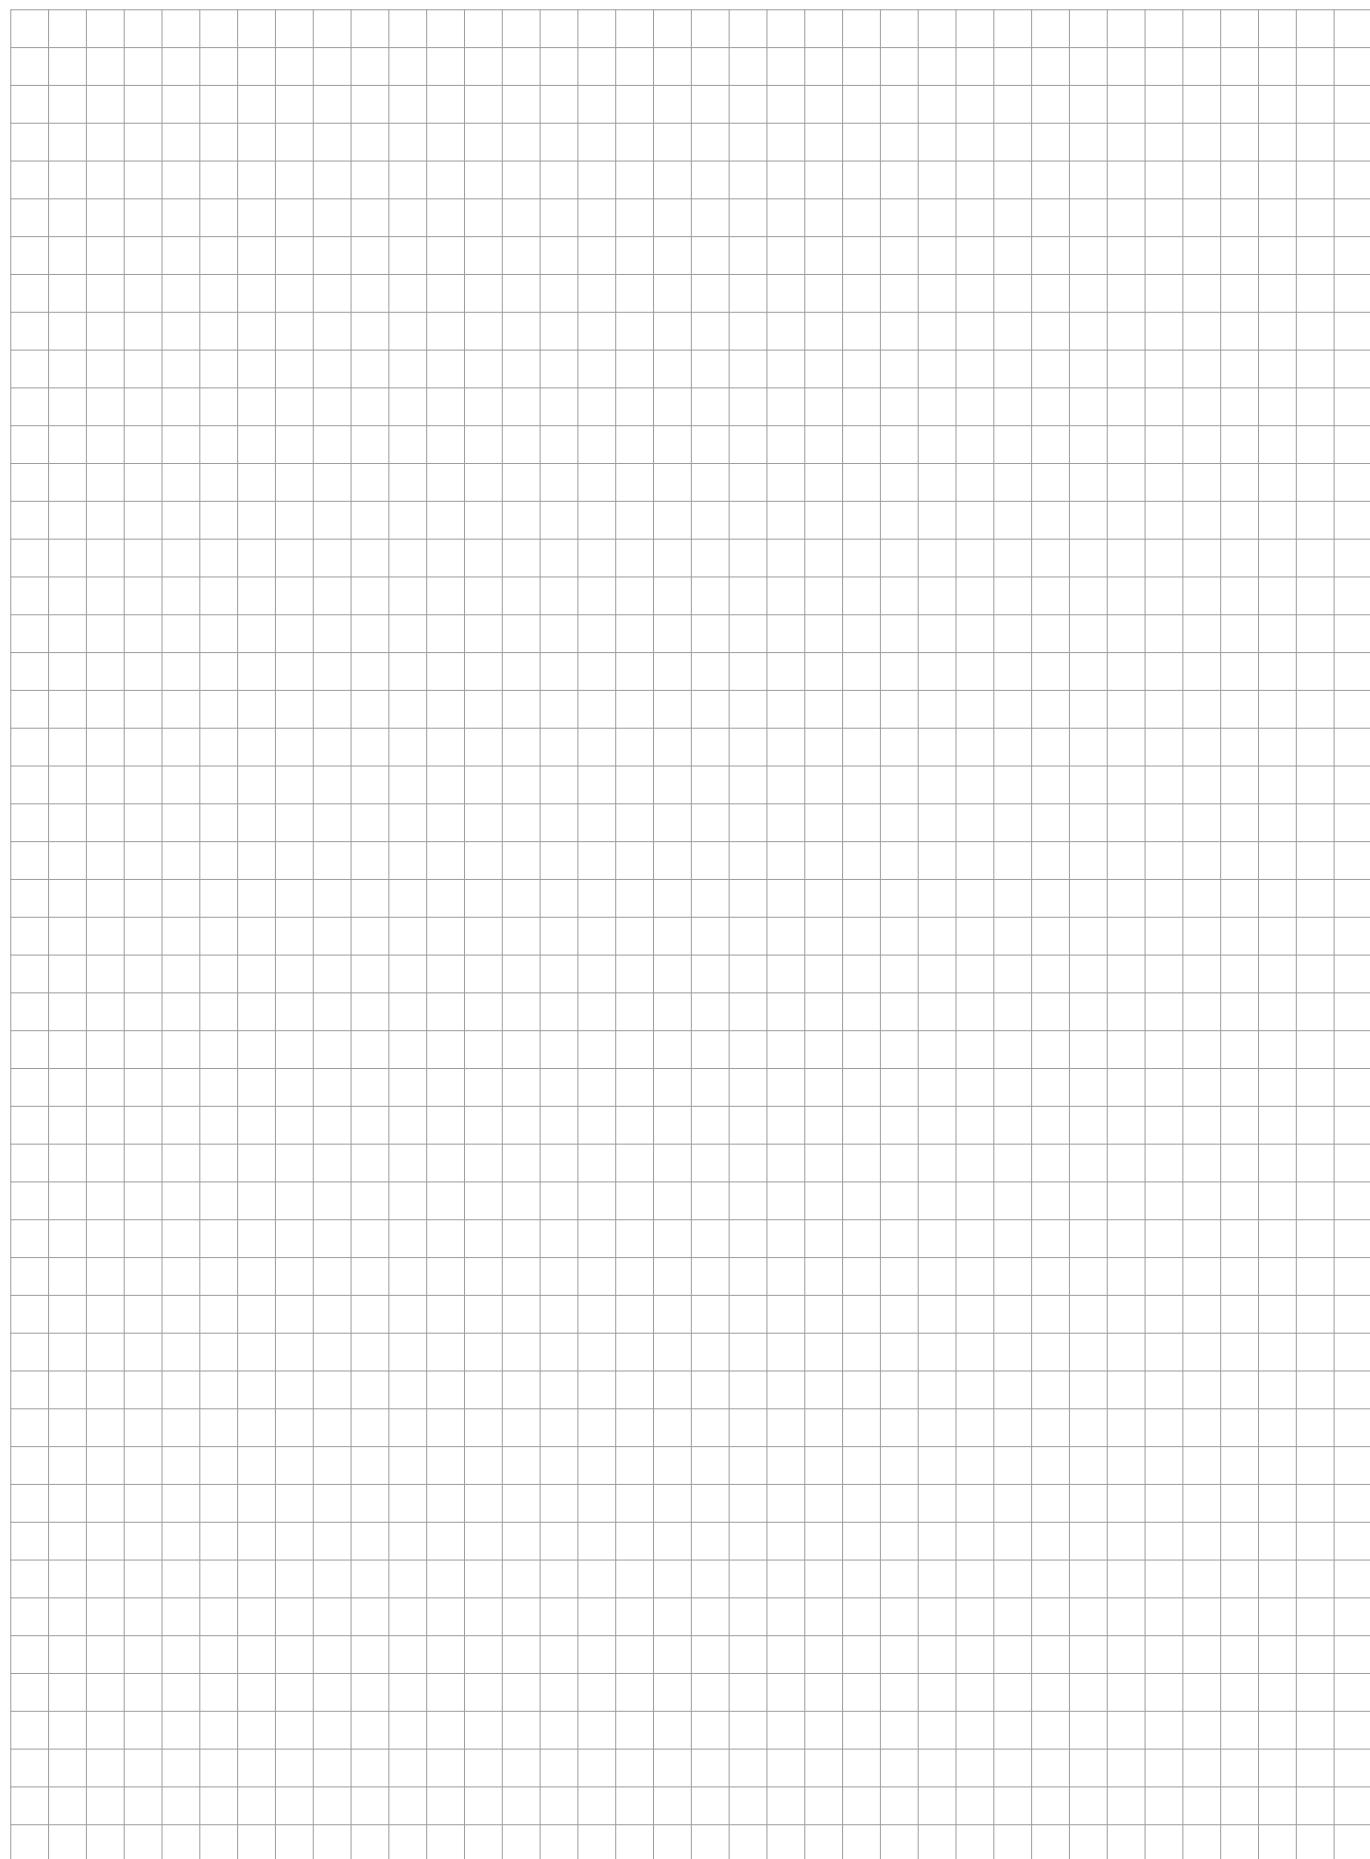

Digital SPD tester

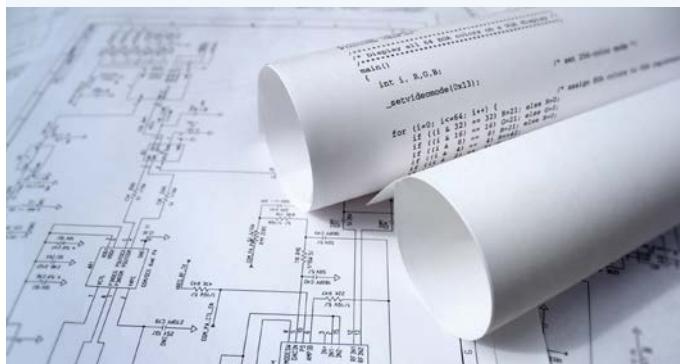

GIGATESTpro-SALTEK

Measuring instrument for SPD control

Test tips

- Tester SPDs (MOVs or GDTs)
- Measurements of insulation resistance
- Measurement of voltage
- The database of SPDs in the instrument
- Easy test result
- Measurement protection by detecting the presence of voltage



Parameter	GIGATESTpro - SALTEK
Test of SPDs	
Measuring range	40 V ÷ 1 050 V
Resolution	1 V
Reference error	± (2% R + 2 D)*
Measuring principle	Increasing DC voltage and simultaneously measures the 1 mA current through the SPD
Insulation resistance	
Measuring range	0,100 MΩ ÷ 9,999 GΩ (U = 50 V ÷ 1 000 V)
Nominal test current	≥ 1 mA
Automatic discharge of tested object	yes
DC and AC voltage (TRMS)	
Measuring range	0 V ÷ 600 V DC / AC (45 Hz ÷ 65 Hz)
Resolution	1 V
Reference error	± (2% R + 2 D)*
Power supply	4x AAA alkaline battery 1,5 V or NiMH accumulator 1,2 V
Display	High contrast bright multicolour graphic OLED
Overvoltage category	CAT III / 300 V or CAT II / 600 V
Ordering number	B00010

* R: reading, D: digit

Index of SALTEK® products – by type

Type	Ordering number	Page
FLP-SG50 V/1	A04054	24
FLP-SG50 VS/1	A04053	24
FLP-25-T1-V/1	A06263	25
FLP-25-T1-VS/1	A06264	25
FLP-25-T1-V/1+1	A06257	26
FLP-25-T1-VS/1+1	A06258	26
FLP-25-T1-V/2	A06259	27
FLP-25-T1-VS/2	A06260	27
FLP-25-T1-V/3	A05300	28
FLP-25-T1-VS/3	A05301	28
FLP-25-T1-V/4	A05302	29
FLP-25-T1-VS/4	A05303	29
FLP-25-T1-V/3+1	A05304	30
FLP-25-T1-VS/3+1	A05305	30
FLP-A50N VS/NPE	A03573	31
FLP-A100N VS/NPE	A03574	31
FLP-B+C MAXI V/1	A05091	32
FLP-B+C MAXI VS/1	A03533	32
FLP-B+C MAXI V/1+1	A05095	33
FLP-B+C MAXI VS/1+1	A03783	33
FLP-B+C MAXI V/2	A05092	34
FLP-B+C MAXI VS/2	A03784	34
FLP-B+C MAXI V/3	A05093	35
FLP-B+C MAXI VS/3	A03570	35
FLP-B+C MAXI V/4	A05094	36
FLP-B+C MAXI VS/4	A03571	36
FLP-B+C MAXI V/3+1	A05096	37
FLP-B+C MAXI VS/3+1	A03572	37
FLP-EV12,5-VBH/1S+1	A07043	38
FLP-EV12,5-VBH/3S+1	A07049	38
FLP-12,5 V/1	A03421	39
FLP-12,5 V/1 S	A03422	39
FLP-12,5-075-VH/1	A04168	40
FLP-12,5-075-VH/1S	A04169	40
FLP-12,5 V/1+1	A03423	41
FLP-12,5 V/1S+1	A03424	41
FLP-12,5 V/2	A03809	42
FLP-12,5 V/2 S	A05182	42
FLP-12,5-075-VH/2	A04170	43
FLP-12,5-075-VH/2S	A04171	43
FLP-12,5 V/3	A03425	44
FLP-12,5 V/3 S	A03426	44
FLP-12,5 V/4	A03429	45
FLP-12,5 V/4 S	A03430	45
FLP-12,5 V/3+1	A03427	46
FLP-12,5 V/3S+1	A03428	46
SLP-075 V/1	A01815	50
SLP-150 V/1	A05185	50
SLP-275 V/1	A01617	50
SLP-385 V/1	A01955	50
SLP-440 V/1	A01817	50
SLP-600 V/1	A03301	50
SLP-075 V/1 S	A01823	51
SLP-150 V/1 S	A05186	51
SLP-275 V/1 S	A01618	51
SLP-385 V/1 S	A02771	51
SLP-440 V/1 S	A01825	51
SLP-600 V/1 S	A03302	51
SLP-275 V/1+1	A01948	52
SLP-275 V/1S+1	A02491	52

Type	Ordering number	Page
SLP-075 V/2	A07022	53
SLP-075 V/2 S	A07023	53
SLP-275 V/2	A01619	53
SLP-275 V/2 S	A05183	53
SLP-275 V/3	A01760	54
SLP-275 V/3 S	A01761	54
SLP-275 V/4	A01722	55
SLP-275 V/4 S	A01763	55
SLP-275 V/3+1	A01946	56
SLP-275 V/3S+1	A02002	56
SLP-385 V/3	A01952	57
SLP-440 V/3	A01910	57
SLP-600 V/3	A06076	57
SLP-385 V/3 S	A02633	58
SLP-440 V/3 S	A01913	58
SLP-600 V/3 S	A06305	58
SLP-075 VB/1	A02155	59
SLP-130 VB/1	A02182	59
SLP-275 VB/1	A01944	59
SLP-075 VB/1 S	A02156	60
SLP-130 VB/1 S	A02996	60
SLP-275 VB/1 S	A01945	60
SLP-275 VB/3+1	A03310	61
SLP-275 VB/3S+1	A03311	61
DA-275 V/1+1	A01872	64
DA-275 V/1S+1	A01975	64
DA-275 V/3+1	A01848	65
DA-275 V/3S+1	A01849	65
DA-075-DJ25	A06094	67
DA-150-DJ25	A06095	67
DA-275-DJ25	A05770	68
DA-275-DJ25-S	A05771	68
DA-275-DF2	A05715	69
DA-275-DF6	A05717	69
DA-275-DF10	A05719	69
DA-275-DF16	A05721	69
DA-275-DF2-S	A05716	70
DA-275-DF6-S	A05718	70
DA-275-DF10-S	A05720	70
DA-275-DF16-S	A05722	70
DA-275 DF 25	A03732	71
DA-275 DFI 1	A01205	72
DA-275-DFi6	A05723	73
DA-275-DFi10	A05724	73
DA-275-DFi16	A05725	73
DA-275-BFi2	A06262	74
DA-275 BFG	A00629	75
CZ-275-A	A06737	76
DA-275 CZS	A01916	77
DA-275-A	A06738	78
DA-275-S	A06739	79
RACK-PROTECTOR-EURO-X12-1U	A05961	80
RACK-PROTECTOR-F6-1U	A05874	80
RACK-PROTECTOR-VF5-1U	A05875	80
RACK-PROTECTOR-VX7-1U	A05873	80
RACK-PROTECTOR-X8-1U	A05872	80
RACK-PROTECTOR-EURO-X12-1U-5	A07008	81
RACK-PROTECTOR-F6-1U-5	A06751	81
RACK-PROTECTOR-X8-1U-5	A07009	81
RACK-PROTECTOR-EURO-X12-1U-PI	A06256	82

Type	Ordering number	Page
RACK-PROTECTOR-X8-1U-PI	A06255	82
RTO-16	A01432	83
RTO-35	A01433	83
RTO-63	A01434	83
SP-T2+T3-320/Y-CLC-LED	A06246	88
SP-T2+T3-320/Y-CLT-LED	A06044	88
SP-T2+T3-320/Y-TLC-LED	A06247	88
SP-T2+T3-320/Y-TLT-LED	A06244	88
SP-T2+T3-320/Y-CCC-LED	A06245	89
SP-T2+T3-320/Y-CCT-LED	A06243	89
SP-T2+T3-320/Y-TTC-LED	A06248	89
SP-T2+T3-320/Y-TTT-LED	A06222	89
DA-320-LED	A06740	90
FLP-PV550 V/U	A06145	93
FLP-PV550 V/U S	A06146	93
FLP-PV1000 VS/Y	A04058	94
FLP-PV1000 V/Y	A04059	94
SLP-PV170 V/U	A03662	95
SLP-PV170 V/U S	A03663	95
SLP-PV500 V/U	A03664	95
SLP-PV500 V/U S	A03665	95
SLP-PV700 V/Y	A03668	96
SLP-PV700 V/Y S	A03669	96
SLP-PV1000 V/Y	A03670	96
SLP-PV1000 V/Y S	A03671	96
SLP-PV1500 V/Y	A06036	96
SLP-PV1500 V/Y S	A06037	96
BD-090-T-V/2-16	A05550	109
BD-090-T-V/2-F16	A05554	109
BD-250-T-V/2-16	A05551	109
BD-250-T-V/2-F16	A05555	109
BDM-006-V/1-FR1	A05709	110
BDM-012-V/1-FR1	A05710	110
BDM-024-V/1-FR1	A05711	110
BDM-048-V/1-FR1	A05712	110
BDM-060-V/1-FR1	A06438	111
BDM-230-V/1-FR	A05713	111
BDM-230-V/1-FR1	A06461	111
BDM-006-V/1-FR2	A06385	112
BDM-012-V/1-FR2	A06398	112
BDM-024-V/1-FR2	A06411	112
BDM-048-V/1-FR2	A06424	112
BDM-060-V/1-FR2	A06439	112
BDM-006-V/2-FR1	A06388	113
BDM-012-V/2-FR1	A06401	113
BDM-024-V/2-FR1	A06414	113
BDM-048-V/2-FR1	A06427	113
BDM-060-V/2-FR1	A06443	113
BDM-230-V/2-FR	A06464	113
BDG-006-V/1-FR1	A05704	114
BDG-012-V/1-FR1	A05705	114
BDG-024-V/1-FR1	A05706	114
BDG-048-V/1-FR1	A05707	114
BDG-060-V/1-FR1	A06499	115
BDG-230-V/1-FR	A05708	115
BDG-230-V/1-FR1	A06514	115
BDG-006-V/1-FR2	A06469	116
BDG-012-V/1-FR2	A06477	116
BDG-024-V/1-FR2	A06485	116
BDG-048-V/1-FR2	A06493	116

Index of SALTEK® products – by type

Type	Ordering number	Page
BDG-060-V/1-FR2	A06500	116
BDG-006-V/2-FR1	A06472	117
BDG-012-V/2-FR1	A06480	117
BDG-024-V/2-FR1	A06488	117
BDG-048-V/2-FR1	A06496	117
BDG-060-V/2-FR1	A06504	117
BDG-230-V/2-FR	A06517	117
BDM-006-V/2-JFR1	A06390	118
BDM-006-V/2-JFR2	A06391	118
BDM-012-V/2-JFR1	A06403	118
BDM-012-V/2-JFR2	A06404	118
BDM-024-V/2-JFR1	A06416	119
BDM-024-V/2-JFR2	A06417	119
BDM-048-V/2-JFR1	A06429	119
BDM-048-V/2-JFR2	A06430	119
BDM-006-V/4-JFR1	A06396	120
BDM-012-V/4-JFR1	A06409	120
BDM-024-V/4-JFR1	A06422	120
BDM-048-V/4-JFR1	A06435	120
BDG-006-V/1-4FR1	A06467	121
BDG-012-V/1-4FR1	A06475	121
BDG-024-V/1-4FR1	A06483	121
BDG-048-V/1-4FR1	A06491	121
BDMHF-006-V/1-FR1	A06547	122
BDMHF-024-V/1-FR1	A06553	122
BDMHF-006-V/1-4FR1	A06545	123
BDMHF-024-V/1-4FR1	A06551	123
BDGHF-006-V/1-FR1	A06520	124
BDGHF-012-V/1-FR1	A06526	124
BDGHF-024-V/1-FR1	A06532	124
BDGHF-230-V/1-FR	A06538	124
BDGHF-006-V/2-FR1	A06523	125
BDGHF-012-V/2-FR1	A06529	125
BDGHF-024-V/2-FR1	A06535	125
BDGHF-230-V/2-FR1	A06541	125
DMG-024-V/1-4FR1-DIF	A06281	126
DMP-012-V/1-FR1	A05798	127
DMP-024-V/1-FR1	A05799	127
DMP-012-V/1-JFR1	A05802	128
DMP-024-V/1-JFR1	A05803	128
DP-012-V/1-F16	A05664	129
DP-024-V/1-F16	A05665	129
DP-048-V/1-F16	A05666	129
BD-090-T	A05821	133
BD-250-T	A05822	133
DM-006/1-R-DJ	A06726	134
DM-012/1-R-DJ	A06727	134
DM-024/1-R-DJ	A06728	134
DM-048/1-R-DJ	A06729	134
DM-012/1-L2-DJ	A06731	135
DM-024/1-L2-DJ	A06732	135
DM-048/1-L2-DJ	A06733	135
DM-006/1 3R DJ	A01350	136
DM-012/1 3R DJ	A01349	136
DM-024/1 3R DJ	A01234	136
DM-006/1 3L DJ	A01402	137
DM-012/1 3L DJ	A02094	137
DM-024/1 3L DJ	A01519	137
DM-006/1 4R DJ	A01675	138
DM-012/1 4R DJ	A01689	138

Type	Ordering number	Page
DM-024/1 4R DJ	A01357	138
DMS-024-T	A06596	139
DMS-048-T	A06597	139
DL-RS DD9	A00968	140
DP-012-25	A06096	141
DP-024-25	A06097	141
DP-048-25	A06098	141
DPF-012DC-16	A06635	142
DPF-024DC-16	A06636	142
DPF-048DC-16	A06637	142
DPF-012DC-16-S	A06664	143
DPF-024DC-16-S	A06665	143
DPF-048DC-16-S	A06666	143
DM-006/1-RS	A05140	147
DM-012/1-RS	A05141	147
DM-024/1-RS	A05142	147
DM-048/1-RS	A05143	147
DM-060/1-RS	A05129	147
DMG-006/1-RS	A05132	148
DMG-012/1-RS	A05133	148
DMG-024/1-RS	A05134	148
DMG-048/1-RS	A05135	148
DMG-060/1-RS	A05136	148
DMJ-012/2-RS	A05144	149
DMJ-024/2-RS	A05145	149
DMJ-048/2-RS	A05131	149
DMJ-060/2-RS	A05146	149
DMHF-006/1-RS	A05138	150
DMHF-015/1-RS	A05139	150
DMLF-024/1-RS	A05333	151
DS-B090-RS	A05148	152
DS-D024-RS	A05153	152
DS-V130-RS	A05151	152
DM-006/1-RB	A06057	155
DM-012/1-RB	A06058	155
DM-024/1-RB	A06059	155
DM-048/1-RB	A06060	155
DMG-006/1-RB	A06061	156
DMG-024/1-RB	A06062	156
DMG-048/1-RB	A06063	156
DMJ-012/2-RB	A06065	157
DMJ-024/2-RB	A06066	157
DMJ-048/2-RB	A06067	157
DMHF-006/1-RB	A06064	158
DMHF-015/1-RB	A06290	158
DMLF-024/1-RB	A06069	159
DS-B090-RB	A06070	160
CLSA-24	A05171	163
CLSA-48	A05172	163
CLSA-ISDN	A05174	164
CLSA-TLF	A05173	164
CLSA-DSL	A05176	165
DL-TLF-UHF	A07084	168
DL-VDSL3	A07120	169
DL-ISDN RJ45	A03382	170
DL-Cat.5e POE plus	A03806	172
DL-Cat. 6A	A06574	173
DL-Cat. 6A-60V	A07108	173
DL-1G-RJ45-PoE-AB	A06148	174
DL-10G-RJ45-PoE-AB	A06149	174

Type	Ordering number	Page
DL-10G-PoE-IP66	A07098	175
DL-1G-60V-PoE	A07069	176
DL-10G-60V-PoE	A07070	176
DL-1G-POE-INJECTOR	A06620	177
Cap for DL-PL-RACK-1U	A04180	181
DL-PL-RACK-1U	A04163	181
DL-Cat.6A-M	A04196	182
DL-Cat.6A-R-M	A04184	182
DL-Cat.6A-60V-M	A04210	183
DL-Cat.6A-60V-R-M	A04209	183
DL-1G-PoE-M	A04165	184
DL-10G-PoE-M	A04181	184
DL-1G-60V-PoE-M	A07085	185
DL-10G-60V-PoE-M	A07086	185
DL-CS-RACK-1U-INJECTOR	A06569	186
DL-1G-POE-PCB-INJECTOR	A06570	187
VL-B75 F/F	A03376	190
HX-090 SMA F/M	A04134	191
HX-090 N50 F/F	A03405	192
HX-090 N50 F/M	A03346	192
HX-230 N50 F/F	A03511	192
HX-230 N50 F/M	A03510	192
HX-350-N50 F/F	A06703	193
HX-350-N50 F/M	A06704	193
HX-470-N50 F/F	A06555	193
HX-470-N50 F/M	A06556	193
ZX-0,44-N50-F/F	A06207	194
FX-090 B75 T F/F	A03385	195
FX-090 F75 T F/F	A03387	195
FX-230 F75 T F/F	A03392	195
FX-090-F75 F/F	A04212	196
SX-090-B50 F/F	A04157	197
SX-090-F75 F/F	A04158	198
ISG-A100	A03590	203
ISG-50	A04086	204
ISG-100	A04078	204
ISG-500	A04127	204
ISGC-50	A05365	205
ISGC-100	A05366	205
ISGC-500	A05368	205
ISGO-500	A05518	206
ISG-50H Ex	A04131	207
ISG-100H Ex	A04132	207
ISG-500H Ex	A04109	207
ISGC-50H Ex	A04128	208
ISGC-100H Ex	A04129	208
ISGC-500H Ex	A04120	208
ISGO-50H Ex	A06142	209
ISGO-100H Ex	A06143	209
ISGO-500H Ex	A05514	209
GIGATESTpro - SALTEK	B00010	212

Index of SALTEK® products – by order number

Ordering number	Type	Page
A00629	DA-275 BFG	75
A00968	DL-RS DD9	140
A01205	DA-275 DFI 1	72
A01234	DM-024/1 3R DJ	136
A01349	DM-012/1 3R DJ	136
A01350	DM-006/1 3R DJ	136
A01357	DM-024/1 4R DJ	138
A01402	DM-006/1 3L DJ	137
A01432	RTO-16	83
A01433	RTO-35	83
A01434	RTO-63	83
A01519	DM-024/1 3L DJ	137
A01617	SLP-275 V/1	50
A01618	SLP-275 V/1 S	51
A01619	SLP-275 V/2	53
A01675	DM-006/1 4R DJ	138
A01689	DM-012/1 4R DJ	138
A01722	SLP-275 V/4	55
A01760	SLP-275 V/3	54
A01761	SLP-275 V/3 S	54
A01763	SLP-275 V/4 S	55
A01815	SLP-075 V/1	50
A01817	SLP-440 V/1	50
A01823	SLP-075 V/1 S	51
A01825	SLP-440 V/1 S	51
A01848	DA-275 V/3+1	65
A01849	DA-275 V/3S+1	65
A01872	DA-275 V/1+1	64
A01910	SLP-440 V/3	57
A01913	SLP-440 V/3 S	58
A01916	DA-275 CZS	77
A01944	SLP-275 VB/1	59
A01945	SLP-275 VB/1 S	60
A01946	SLP-275 V/3+1	56
A01948	SLP-275 V/1+1	52
A01952	SLP-385 V/3	57
A01955	SLP-385 V/1	50
A01975	DA-275 V/1S+1	64
A02002	SLP-275 V/3S+1	56
A02094	DM-012/1 3L DJ	137
A02155	SLP-075 VB/1	59
A02156	SLP-075 VB/1 S	60
A02182	SLP-130 VB/1	59
A02491	SLP-275 V/1S+1	52
A02633	SLP-385 V/3 S	58
A02771	SLP-385 V/1 S	51
A02996	SLP-130 VB/1 S	60
A03301	SLP-600 V/1	50
A03302	SLP-600 V/1 S	51
A03310	SLP-275 VB/3+1	61
A03311	SLP-275 VB/3S+1	61
A03346	HX-090 N50 F/M	192
A03376	VL-B75 F/F	190
A03382	DL-ISDN RJ45	170
A03385	FX-090 B75 T F/F	195
A03387	FX-090 F75 T F/F	195
A03392	FX-230 F75 T F/F	195
A03405	HX-090 N50 F/F	192
A03421	FLP-12,5 V/1	39
A03422	FLP-12,5 V/1 S	39

Ordering number	Type	Page
A03423	FLP-12,5 V/1+1	41
A03424	FLP-12,5 V/1S+1	41
A03425	FLP-12,5 V/3	44
A03426	FLP-12,5 V/3 S	44
A03427	FLP-12,5 V/3+1	46
A03428	FLP-12,5 V/3S+1	46
A03429	FLP-12,5 V/4	45
A03430	FLP-12,5 V/4 S	45
A03510	HX-230 N50 F/M	192
A03511	HX-230 N50 F/F	192
A03533	FLP-B+C MAXI VS/1	32
A03570	FLP-B+C MAXI VS/3	35
A03571	FLP-B+C MAXI VS/4	36
A03572	FLP-B+C MAXI VS/3+1	37
A03573	FLP-A50N VS/NPE	31
A03574	FLP-A100N VS/NPE	31
A03590	ISG-A100	203
A03662	SLP-PV170 V/U	95
A03663	SLP-PV170 V/U S	95
A03664	SLP-PV500 V/U	95
A03665	SLP-PV500 V/U S	95
A03668	SLP-PV700 V/Y	96
A03669	SLP-PV700 V/Y S	96
A03670	SLP-PV1000 V/Y	96
A03671	SLP-PV1000 V/Y S	96
A03732	DA-275 DF 25	71
A03783	FLP-B+C MAXI VS/1+1	33
A03784	FLP-B+C MAXI VS/2	34
A03806	DL-Cat.5e POE plus	172
A03809	FLP-12,5 V/2	42
A04053	FLP-SG50 VS/1	24
A04054	FLP-SG50 V/1	24
A04058	FLP-PV1000 VS/Y	94
A04059	FLP-PV1000 V/Y	94
A04078	ISG-100	204
A04086	ISG-50	204
A04109	ISG-500H Ex	207
A04120	ISGC-500H Ex	208
A04127	ISG-500	204
A04128	ISGC-50H Ex	208
A04129	ISGC-100H Ex	208
A04131	ISG-50H Ex	207
A04132	ISG-100H Ex	207
A04134	HX-090 SMA F/M	191
A04157	SX-090-B50 F/F	197
A04158	SX-090-F75 F/F	198
A04163	DL-PL-RACK-1U	181
A04165	DL-1G-PoE-M	184
A04168	FLP-12,5-075-VH/1	40
A04169	FLP-12,5-075-VH/1S	40
A04170	FLP-12,5-075-VH/2	43
A04171	FLP-12,5-075-VH/2S	43
A04180	Cap for DL-PL-RACK-1U	181
A04181	DL-10G-PoE-M	184
A04184	DL-Cat.6A-R-M	182
A04196	DL-Cat.6A-M	182
A04209	DL-Cat.6A-60V-R-M	183
A04210	DL-Cat.6A-60V-M	183
A04212	FX-090-F75 F/F	196
A05091	FLP-B+C MAXI V/1	32

Ordering number	Type	Page
A05092	FLP-B+C MAXI V/2	34
A05093	FLP-B+C MAXI V/3	35
A05094	FLP-B+C MAXI V/4	36
A05095	FLP-B+C MAXI V/1+1	33
A05096	FLP-B+C MAXI V/3+1	37
A05129	DM-060/1-RS	147
A05131	DMJ-048/2-RS	149
A05132	DMG-006/1-RS	148
A05133	DMG-012/1-RS	148
A05134	DMG-024/1-RS	148
A05135	DMG-048/1-RS	148
A05136	DMG-060/1-RS	148
A05138	DMHF-006/1-RS	150
A05139	DMHF-015/1-RS	150
A05140	DM-006/1-RS	147
A05141	DM-012/1-RS	147
A05142	DM-024/1-RS	147
A05143	DM-048/1-RS	147
A05144	DMJ-012/2-RS	149
A05145	DMJ-024/2-RS	149
A05146	DMJ-060/2-RS	149
A05148	DS-B090-RS	152
A05151	DS-V130-RS	152
A05153	DS-D024-RS	152
A05171	CLSA-24	163
A05172	CLSA-48	163
A05173	CLSA-TLF	164
A05174	CLSA-ISDN	164
A05176	CLSA-DSL	165
A05182	FLP-12,5 V/2 S	42
A05183	SLP-275 V/2 S	53
A05185	SLP-150 V/1	50
A05186	SLP-150 V/1 S	51
A05300	FLP-25-T1-V/3	28
A05301	FLP-25-T1-VS/3	28
A05302	FLP-25-T1-V/4	29
A05303	FLP-25-T1-VS/4	29
A05304	FLP-25-T1-V/3+1	30
A05305	FLP-25-T1-VS/3+1	30
A05333	DMLF-024/1-RS	151
A05365	ISGC-50	205
A05366	ISGC-100	205
A05368	ISGC-500	205
A05514	ISGO-500H Ex	209
A05518	ISGO-500	206
A05550	BD-090-T-V/2-16	109
A05551	BD-250-T-V/2-16	109
A05554	BD-090-T-V/2-F16	109
A05555	BD-250-T-V/2-F16	109
A05664	DP-012-V/1-F16	129
A05665	DP-024-V/1-F16	129
A05666	DP-048-V/1-F16	129
A05704	BDG-006-V/1-FR1	114
A05705	BDG-012-V/1-FR1	114
A05706	BDG-024-V/1-FR1	114
A05707	BDG-048-V/1-FR1	114
A05708	BDG-230-V/1-FR	115
A05709	BDM-006-V/1-FR1	110
A05710	BDM-012-V/1-FR1	110
A05711	BDM-024-V/1-FR1	110


Index of SALTEK® products – by order number

Ordering number	Type	Page	Ordering number	Type	Page	Ordering number	Type	Page
A05712	BDM-048-V/1-FR1	110	A06247	SP-T2+T3-320/Y-TLC-LED	88	A06532	BDGHF-024-V/1-FR1	124
A05713	BDM-230-V/1-FR	111	A06248	SP-T2+T3-320/Y-TTC-LED	89	A06535	BDGHF-024-V/2-FR1	125
A05715	DA-275-DF2	69	A06255	RACK-PROTECTOR-X8-1U-PI	82	A06538	BDGHF-230-V/1-FR	124
A05716	DA-275-DF2-S	70	A06256	RACK-PROTECTOR-EURO-X12-1U-PI	82	A06541	BDGHF-230-V/2-FR1	125
A05717	DA-275-DF6	69	A06257	FLP-25-T1-V/1+1	26	A06545	BDMHF-006-V/1-4FR1	123
A05718	DA-275-DF6-S	70	A06258	FLP-25-T1-VS/1+1	26	A06547	BDMHF-006-V/1-FR1	122
A05719	DA-275-DF10	69	A06259	FLP-25-T1-V/2	27	A06551	BDMHF-024-V/1-4FR1	123
A05720	DA-275-DF10-S	70	A06260	FLP-25-T1-VS/2	27	A06553	BDMHF-024-V/1-FR1	122
A05721	DA-275-DF16	69	A06262	DA-275-BFi2	74	A06555	HX-470-N50 F/F	193
A05722	DA-275-DF16-S	70	A06263	FLP-25-T1-V/1	25	A06556	HX-470-N50 F/M	193
A05723	DA-275-DF16	73	A06264	FLP-25-T1-VS/1	25	A06569	DL-CS-RACK-1U-INJECTOR	186
A05724	DA-275-DF10	73	A06281	DMG-024-V/1-4FR1-DIF	126	A06570	DL-1G-POE-PCB-INJECTOR	187
A05725	DA-275-DF16	73	A06290	DMHF-015/V-1-RB	158	A06574	DL-Cat. 6A	173
A05770	DA-275-DJ25	68	A06305	SLP-600 V/3 S	58	A06596	DMS-024-T	139
A05771	DA-275-DJ25-S	68	A06385	BDM-006-V/1-FR2	112	A06597	DMS-048-T	139
A05798	DMP-012-V/1-FR1	127	A06388	BDM-006-V/2-FR1	113	A06620	DL-1G-POE-INJECTOR	177
A05799	DMP-024-V/1-FR1	127	A06390	BDM-006-V/2-JFR1	118	A06635	DPF-012DC-16	142
A05802	DMP-012-V/1-JFR1	128	A06391	BDM-006-V/2-JFR2	118	A06636	DPF-024DC-16	142
A05803	DMP-024-V/1-JFR1	128	A06396	BDM-006-V/4-JFR1	120	A06637	DPF-048DC-16	142
A05821	BD-090-T	133	A06398	BDM-012-V/1-FR2	112	A06664	DPF-012DC-16-S	143
A05822	BD-250-T	133	A06401	BDM-012-V/2-FR1	113	A06665	DPF-024DC-16-S	143
A05872	RACK-PROTECTOR-X8-1U	80	A06403	BDM-012-V/2-JFR1	118	A06666	DPF-048DC-16-S	143
A05873	RACK-PROTECTOR-VX7-1U	80	A06404	BDM-012-V/2-JFR2	118	A06703	HX-350-N50 F/F	193
A05874	RACK-PROTECTOR-F6-1U	80	A06409	BDM-012-V/4-JFR1	120	A06704	HX-350-N50 F/M	193
A05875	RACK-PROTECTOR-VF5-1U	80	A06411	BDM-024-V/1-FR2	112	A06726	DM-006/1-R-DJ	134
A05961	RACK-PROTECTOR-EURO-X12-1U	80	A06414	BDM-024-V/2-FR1	113	A06727	DM-012/1-R-DJ	134
A06036	SLP-PV1500 V/Y	96	A06416	BDM-024-V/2-JFR1	119	A06728	DM-024/1-R-DJ	134
A06037	SLP-PV1500 V/Y S	96	A06417	BDM-024-V/2-JFR2	119	A06729	DM-048/1-R-DJ	134
A06044	SP-T2+T3-320/Y-CLT-LED	88	A06422	BDM-024-V/4-JFR1	120	A06731	DM-012/1-L2-DJ	135
A06057	DM-006/1-RB	155	A06424	BDM-048-V/1-FR2	112	A06732	DM-024/1-L2-DJ	135
A06058	DM-012/1-RB	155	A06427	BDM-048-V/2-FR1	113	A06733	DM-048/1-L2-DJ	135
A06059	DM-024/1-RB	155	A06429	BDM-048-V/2-JFR1	119	A06737	CZ-275-A	76
A06060	DM-048/1-RB	155	A06430	BDM-048-V/2-JFR2	119	A06738	DA-275-A	78
A06061	DMG-006/1-RB	156	A06435	BDM-048-V/4-JFR1	120	A06739	DA-275-S	79
A06062	DMG-024/1-RB	156	A06438	BDM-060-V/1-FR1	111	A06740	DA-320-LED	90
A06063	DMG-048/1-RB	156	A06439	BDM-060-V/1-FR2	112	A06751	RACK-PROTECTOR-F6-1U-5	81
A06064	DMHF-006/1-RB	158	A06443	BDM-060-V/2-FR1	113	A07008	RACK-PROTECTOR-EURO-X12-1U-5	81
A06065	DMJ-012/2-RB	157	A06461	BDM-230-V/1-FR1	111	A07009	RACK-PROTECTOR-X8-1U-5	81
A06066	DMJ-024/2-RB	157	A06464	BDM-230-V/2-FR	113	A07022	SLP-075 V/2	53
A06067	DMJ-048/2-RB	157	A06467	BDG-006-V/1-4FR1	121	A07023	SLP-075 V/2 S	53
A06069	DMLF-024/1-RB	159	A06469	BDG-006-V/1-FR2	116	A07043	FLP-EV12,5-VBH/1S+1	38
A06070	DS-B090-RB	160	A06472	BDG-006-V/2-FR1	117	A07049	FLP-EV12,5-VBH/3S+1	38
A06076	SLP-600 V/3	57	A06475	BDG-012-V/1-4FR1	121	A07069	DL-1G-60V-PoE	176
A06094	DA-075-DJ25	67	A06477	BDG-012-V/1-FR2	116	A07070	DL-10G-60V-PoE	176
A06095	DA-150-DJ25	67	A06480	BDG-012-V/2-FR1	117	A07084	DL-TLF-UHF	168
A06096	DP-012-25	141	A06483	BDG-024-V/1-4FR1	121	A07085	DL-1G-60V-PoE-M	185
A06097	DP-024-25	141	A06485	BDG-024-V/1-FR2	116	A07086	DL-10G-60V-PoE-M	185
A06098	DP-048-25	141	A06488	BDG-024-V/2-FR1	117	A07098	DL-10G-PoE-IP66	175
A06142	ISGO-50H Ex	209	A06491	BDG-048-V/1-4FR1	121	A07108	DL-Cat. 6A-60V	173
A06143	ISGO-100H Ex	209	A06493	BDG-048-V/1-FR2	116	A07120	DL-VDSL3	169
A06145	FLP-PV550 V/U	93	A06496	BDG-048-V/2-FR1	117	B00010	GIGATESTpro - SALTEK	212
A06146	FLP-PV550 V/U S	93	A06499	BDG-060-V/1-FR1	115			
A06148	DL-1G-RJ45-PoE-AB	174	A06500	BDG-060-V/1-FR2	116			
A06149	DL-10G-RJ45-PoE-AB	174	A06504	BDG-060-V/2-FR1	117			
A06207	ZX-0,44-N50-F/F	194	A06514	BDG-230-V/1-FR1	115			
A06222	SP-T2+T3-320/Y-TTT-LED	89	A06517	BDG-230-V/2-FR	117			
A06243	SP-T2+T3-320/Y-CCT-LED	89	A06520	BDGHF-006-V/1-FR1	124			
A06244	SP-T2+T3-320/Y-TLT-LED	88	A06523	BDGHF-006-V/2-FR1	125			
A06245	SP-T2+T3-320/Y-CCC-LED	89	A06526	BDGHF-012-V/1-FR1	124			
A06246	SP-T2+T3-320/Y-CLC-LED	88	A06529	BDGHF-012-V/2-FR1	125			


Notes

A large grid of squares, approximately 20 columns by 25 rows, intended for handwritten notes.

Notes

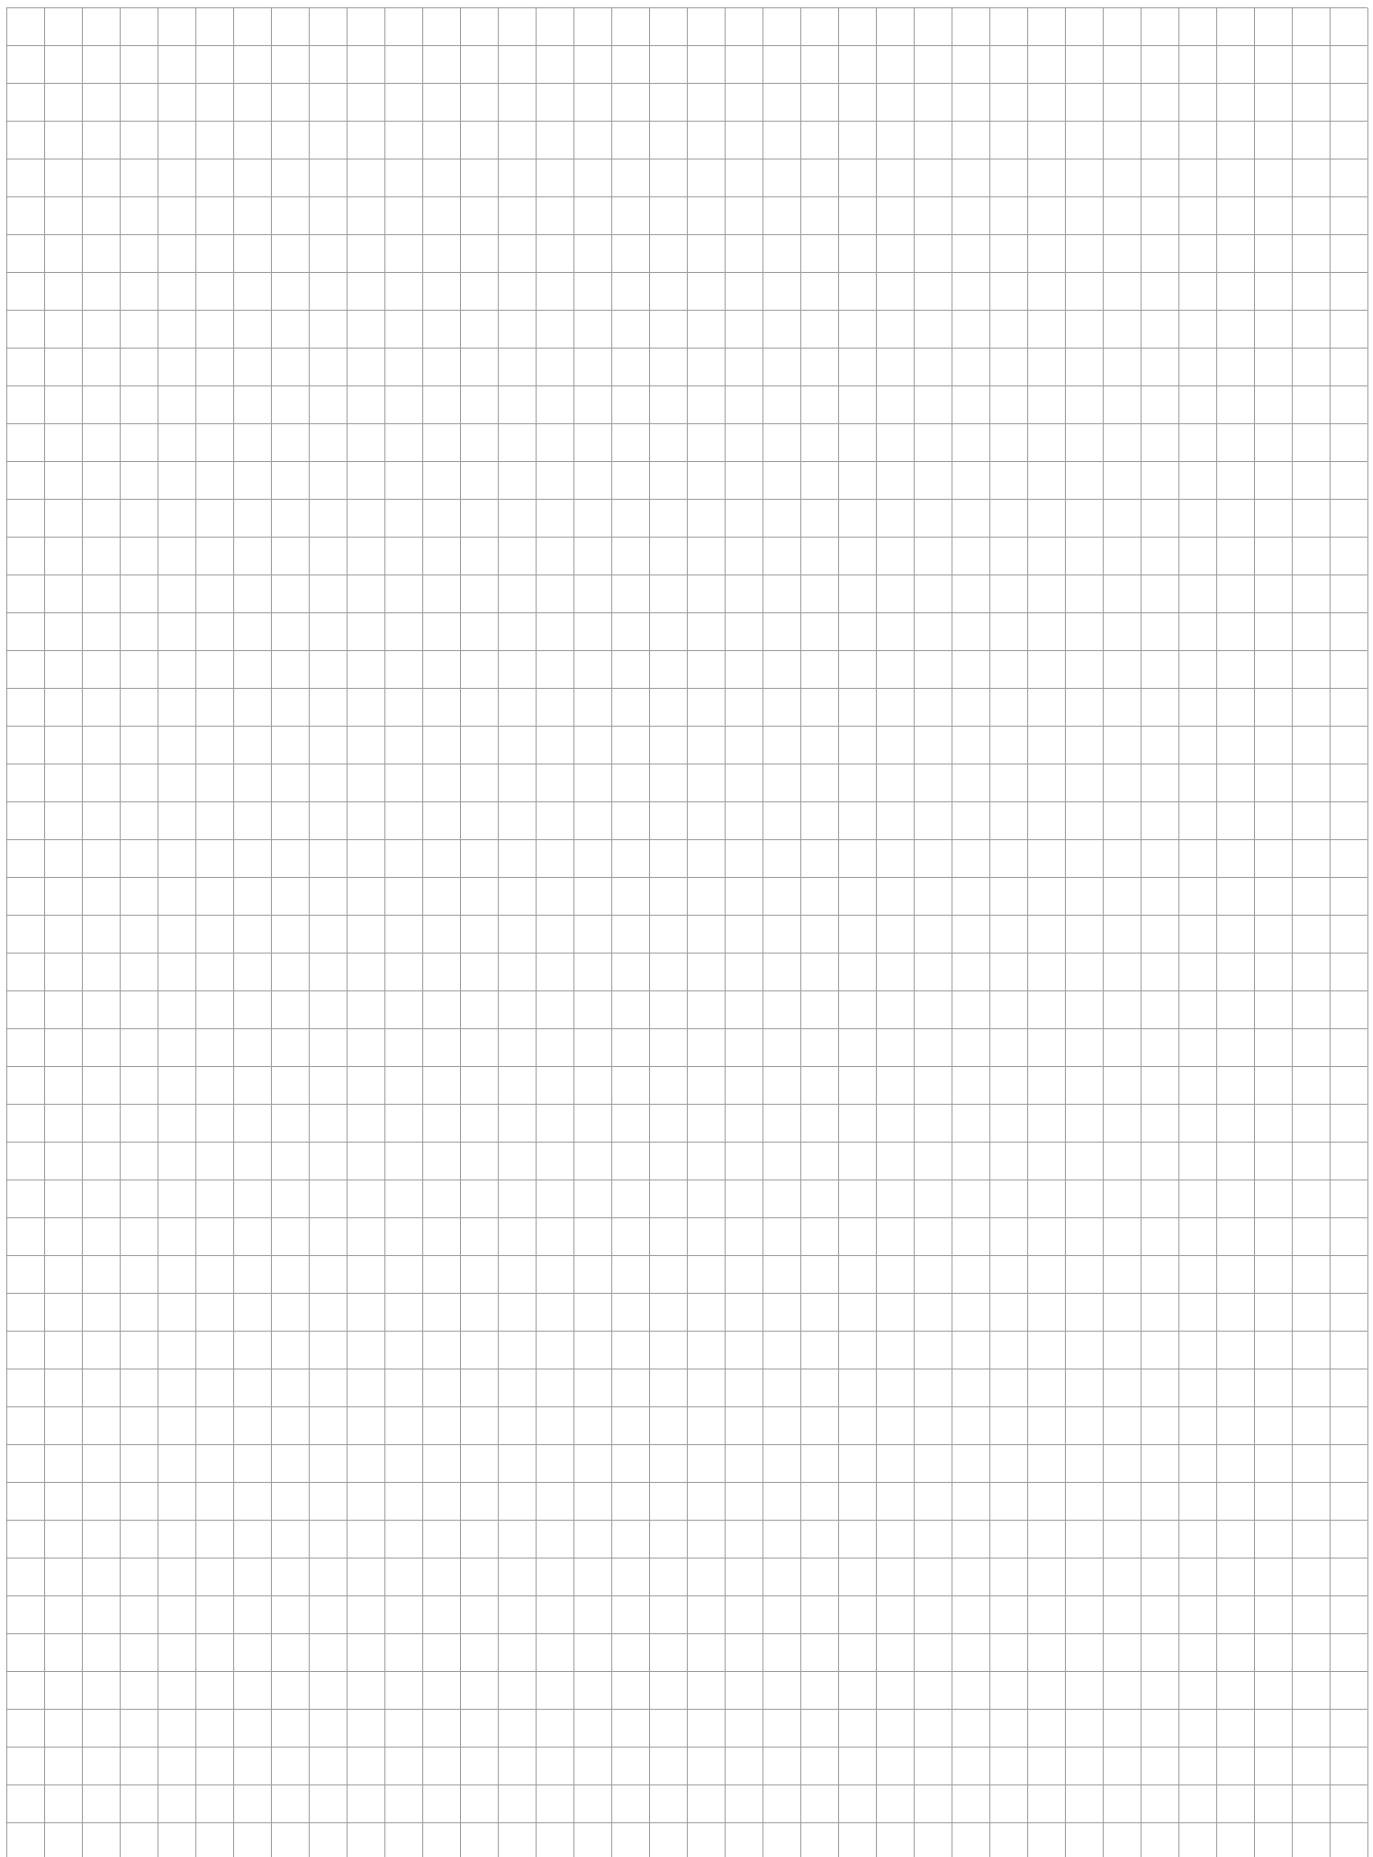

SALTEK s.r.o.
Dráždanská 85
400 07 Ústí nad Labem
Czech Republic
Phone: +420 272 942 470
E-mail: trade@saltek.cz
www.saltek.eu/en

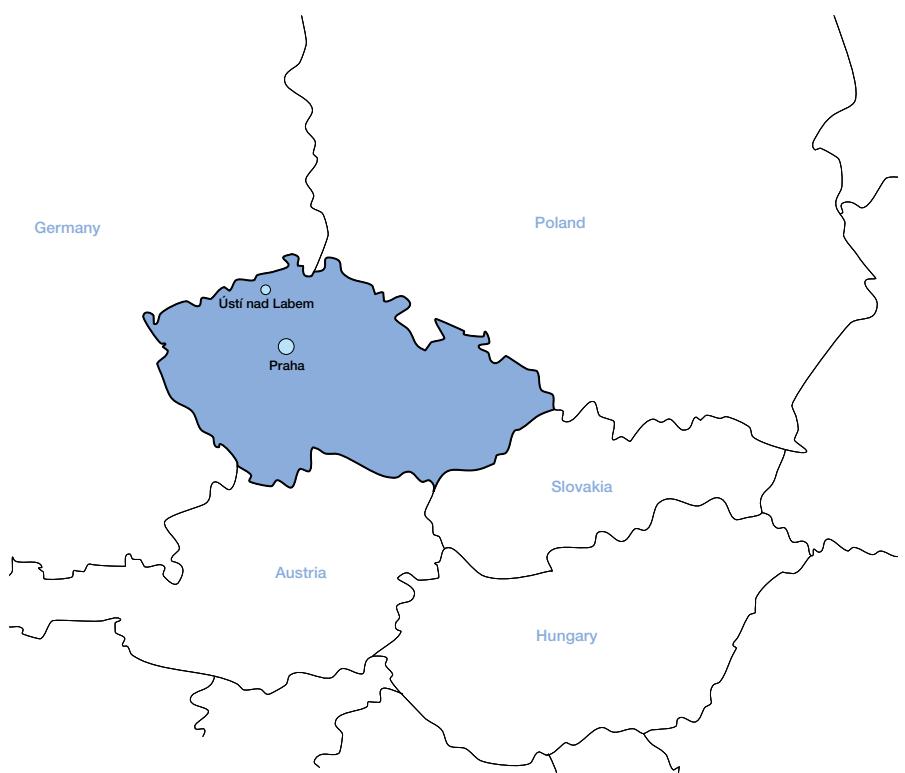

SALTEK s.r.o.
Drážďanská 85
400 07 Ústí nad Labem
Czech Republic
Phone: +420 272 942 470
E-mail: trade@saltek.cz
www.saltek.eu/en

Distributor: